

TARABURY LANE E.L. LOT 20, BLK B, WILLO ESQUE 2nd ADD
To W.L. LOT 15, BLK B, WILLO ESQUE 2nd ADD.



VANTAGE VIEW CIRCLE N.L. TARABURY LANE To & INCLUDING
CUL-DE-SAC.


VANTAGE VIEW CIRCLE S.L. TARABURY LANE To & INCLUDING
CUL-DE-SAC.

CITY OF WICHITA, KANSAS

R.W. LINN CITY ENGINEER

PROJECT No. DAKS 573031

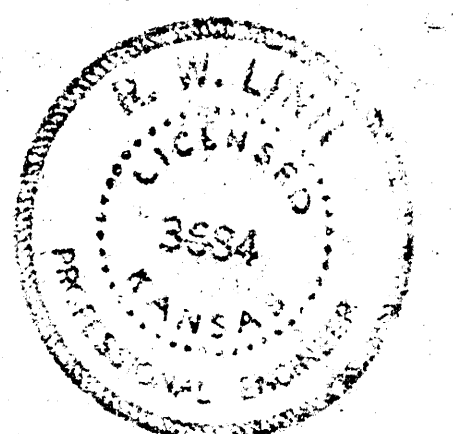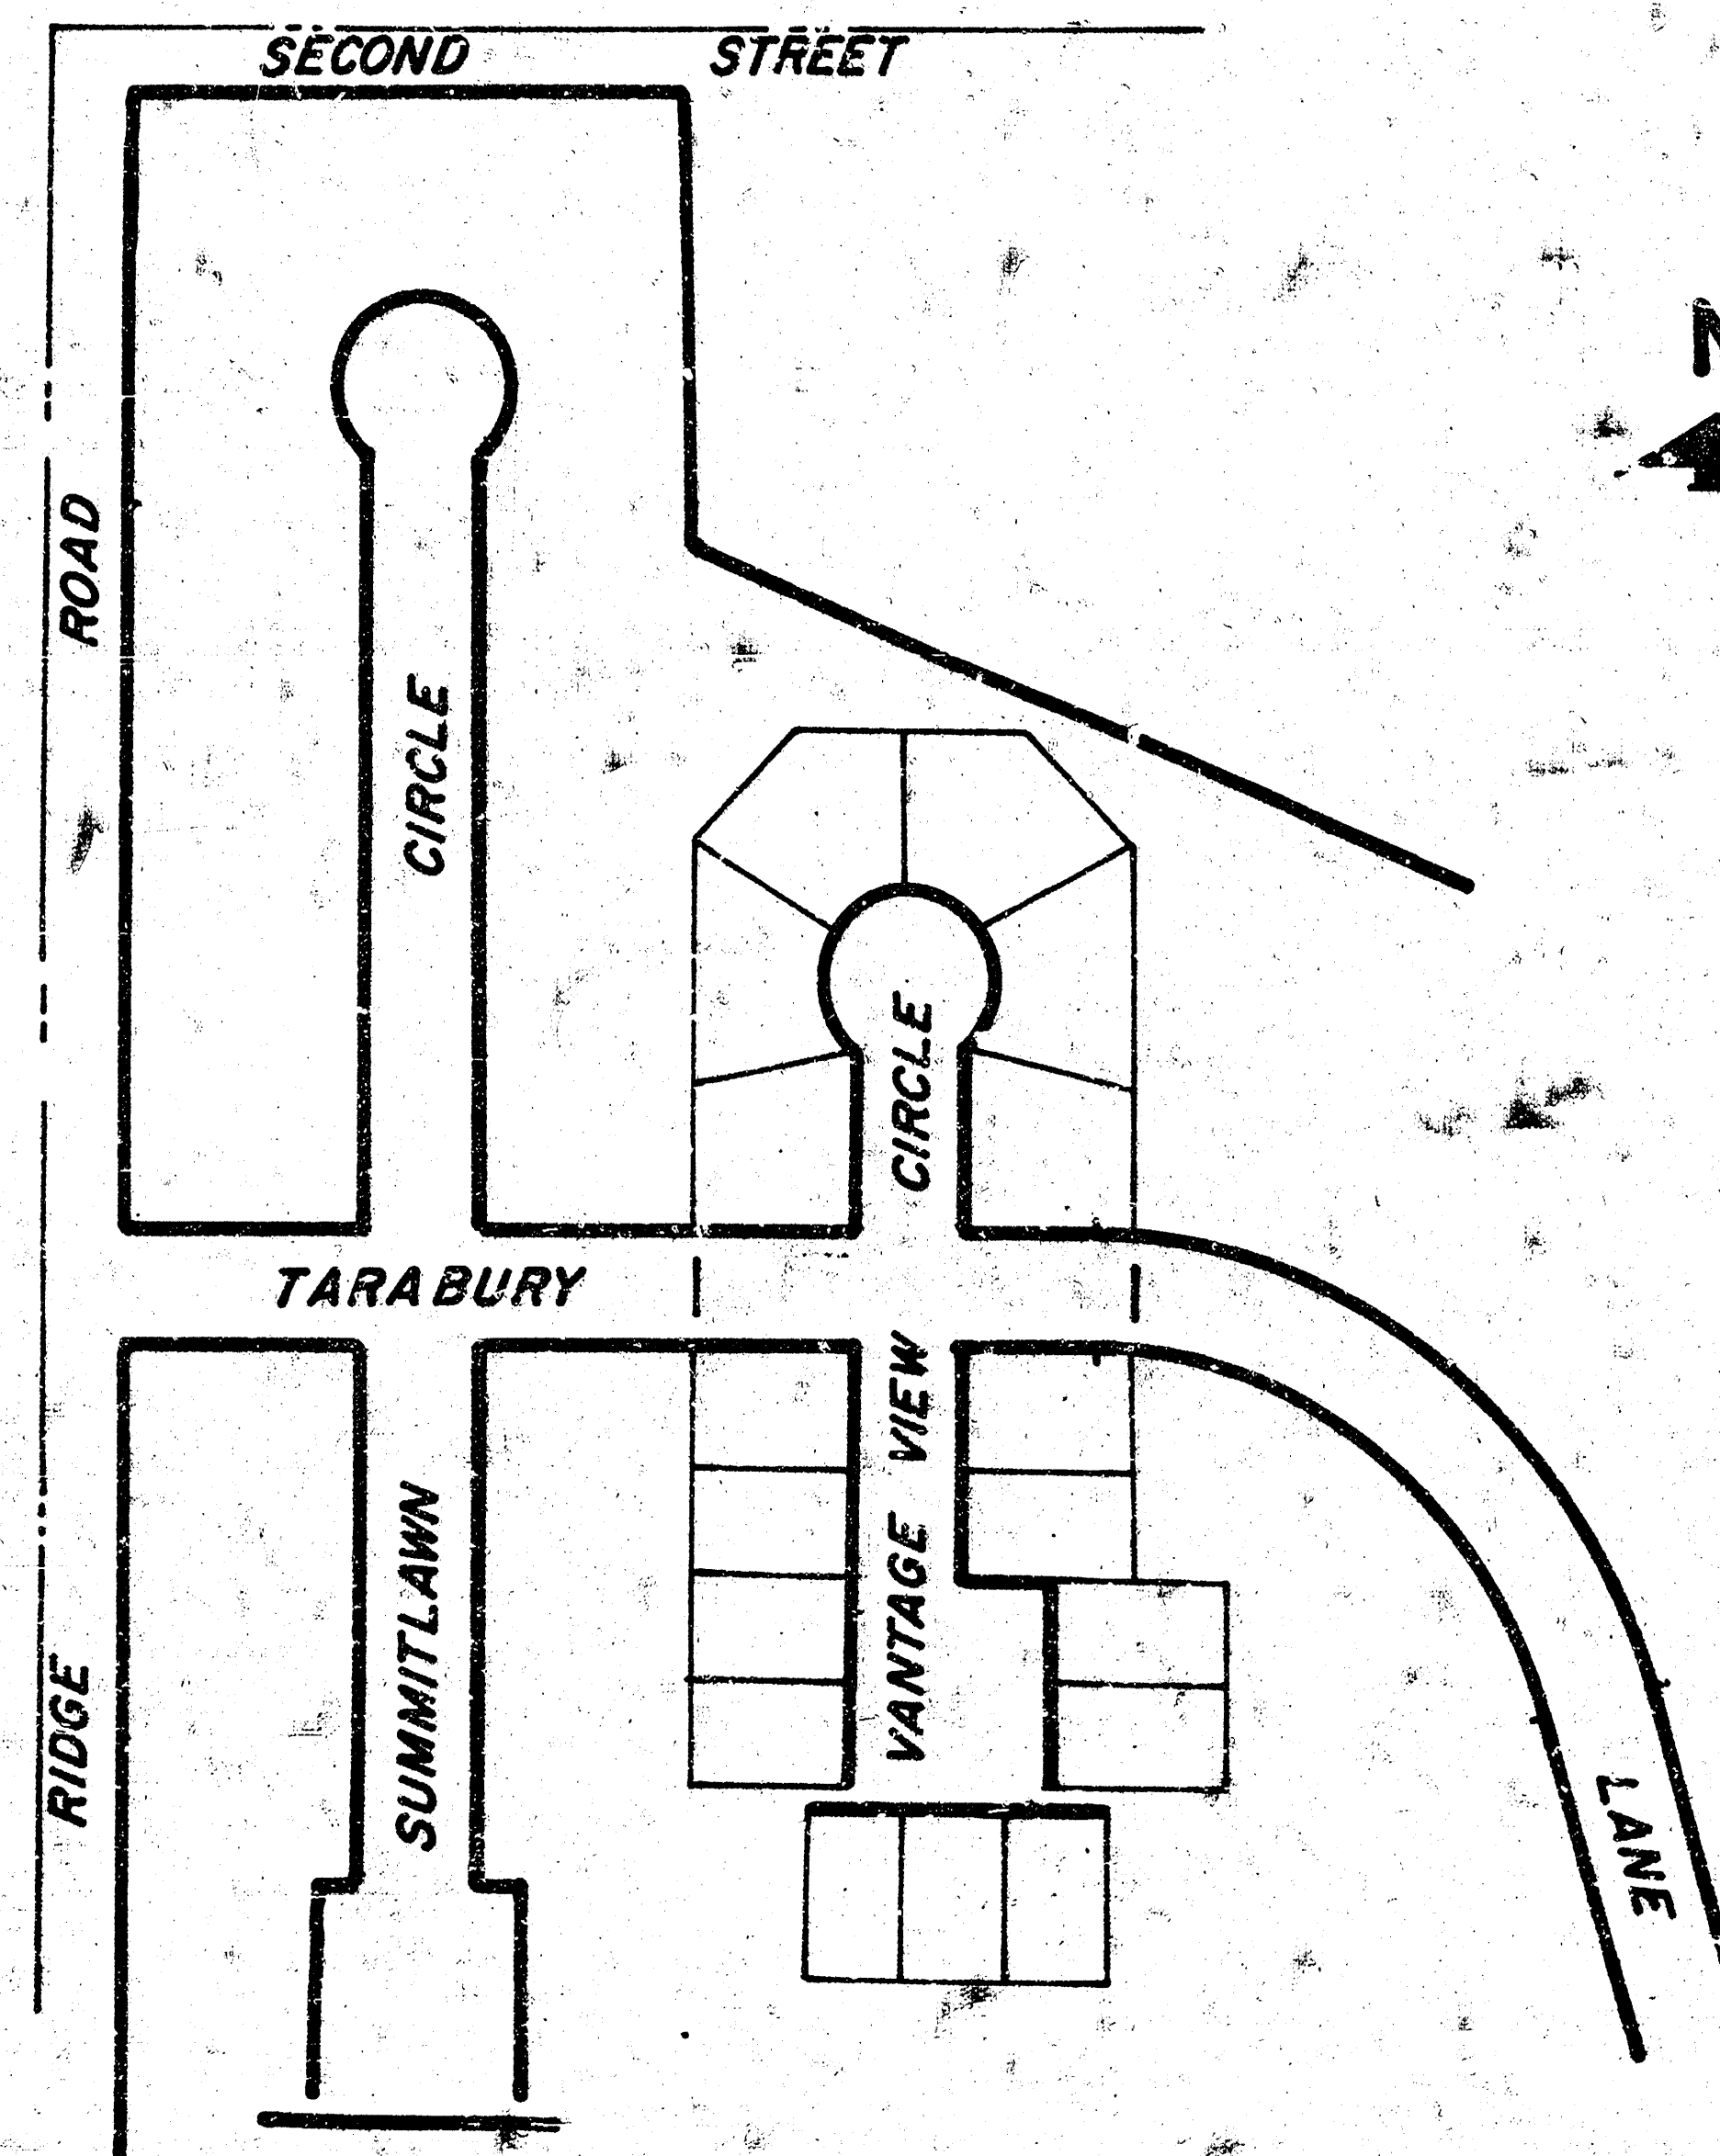

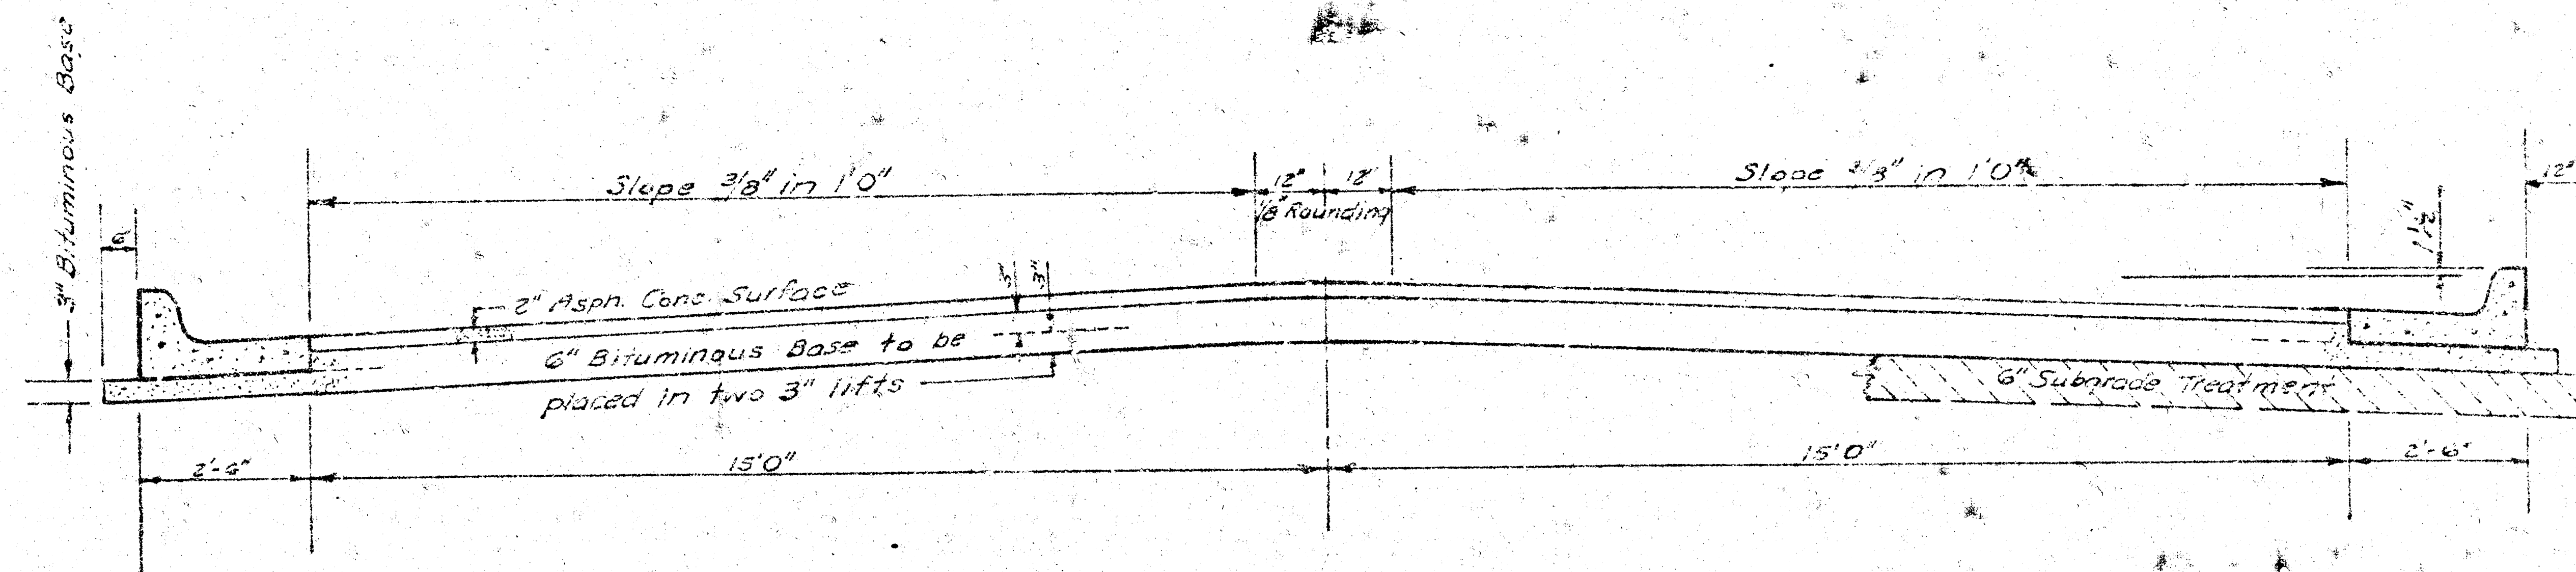


TYPICAL SECTION

35' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE 0.05 GALLONS PER SQ YD BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT.

BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC ELECTRONIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND PLACED SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE CENTERLINE IN THE TOP LIFT.


DETAIL OF TRANSVERSE CONSTRUCTION JOINTS

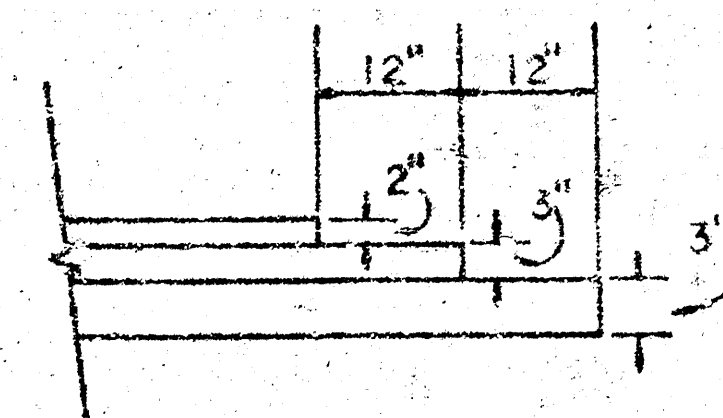


TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

The A.C. Pavement between the comb curb & gutter shall be paid as Sq. Yds. 8" A.C. Pavement (2" Bituminous Base).
The Bituminous Base under the comb curb & gutter shall be paid as Sq. Yds. 3" Bituminous Base.

COMBINED CURB & GUTTER

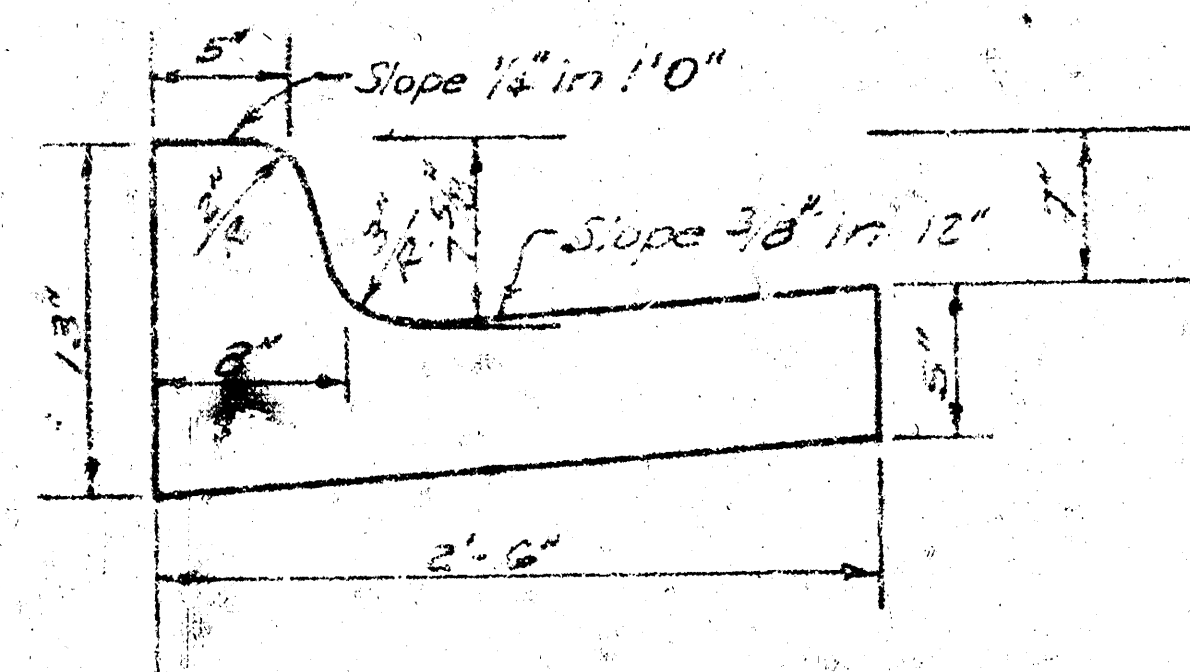

ROLL TYPE CURB & GUTTER

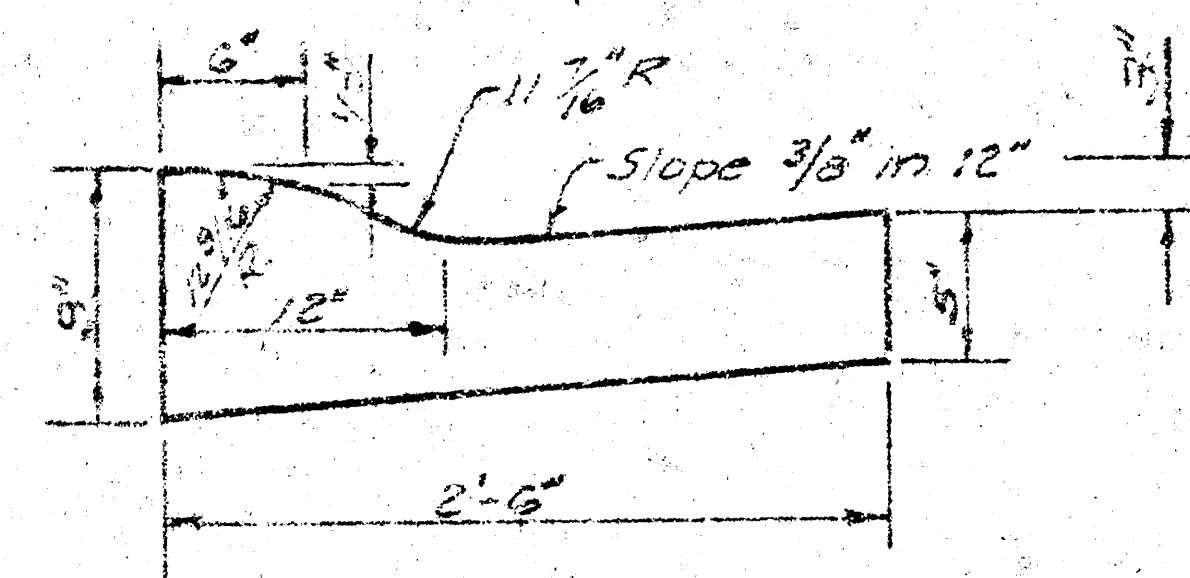


CITY OF WICHITA KANSAS

DEPARTMENT of PUBLIC WORKS - Engineering Division

R.W. LINN CITY ENGINEER

DATE Sept. 1974 Proj. No.

S.M. 14057 "X" TOP East Headwall R.C.B. on
RIDGE ROAD 780' S. of 2ND STREET.

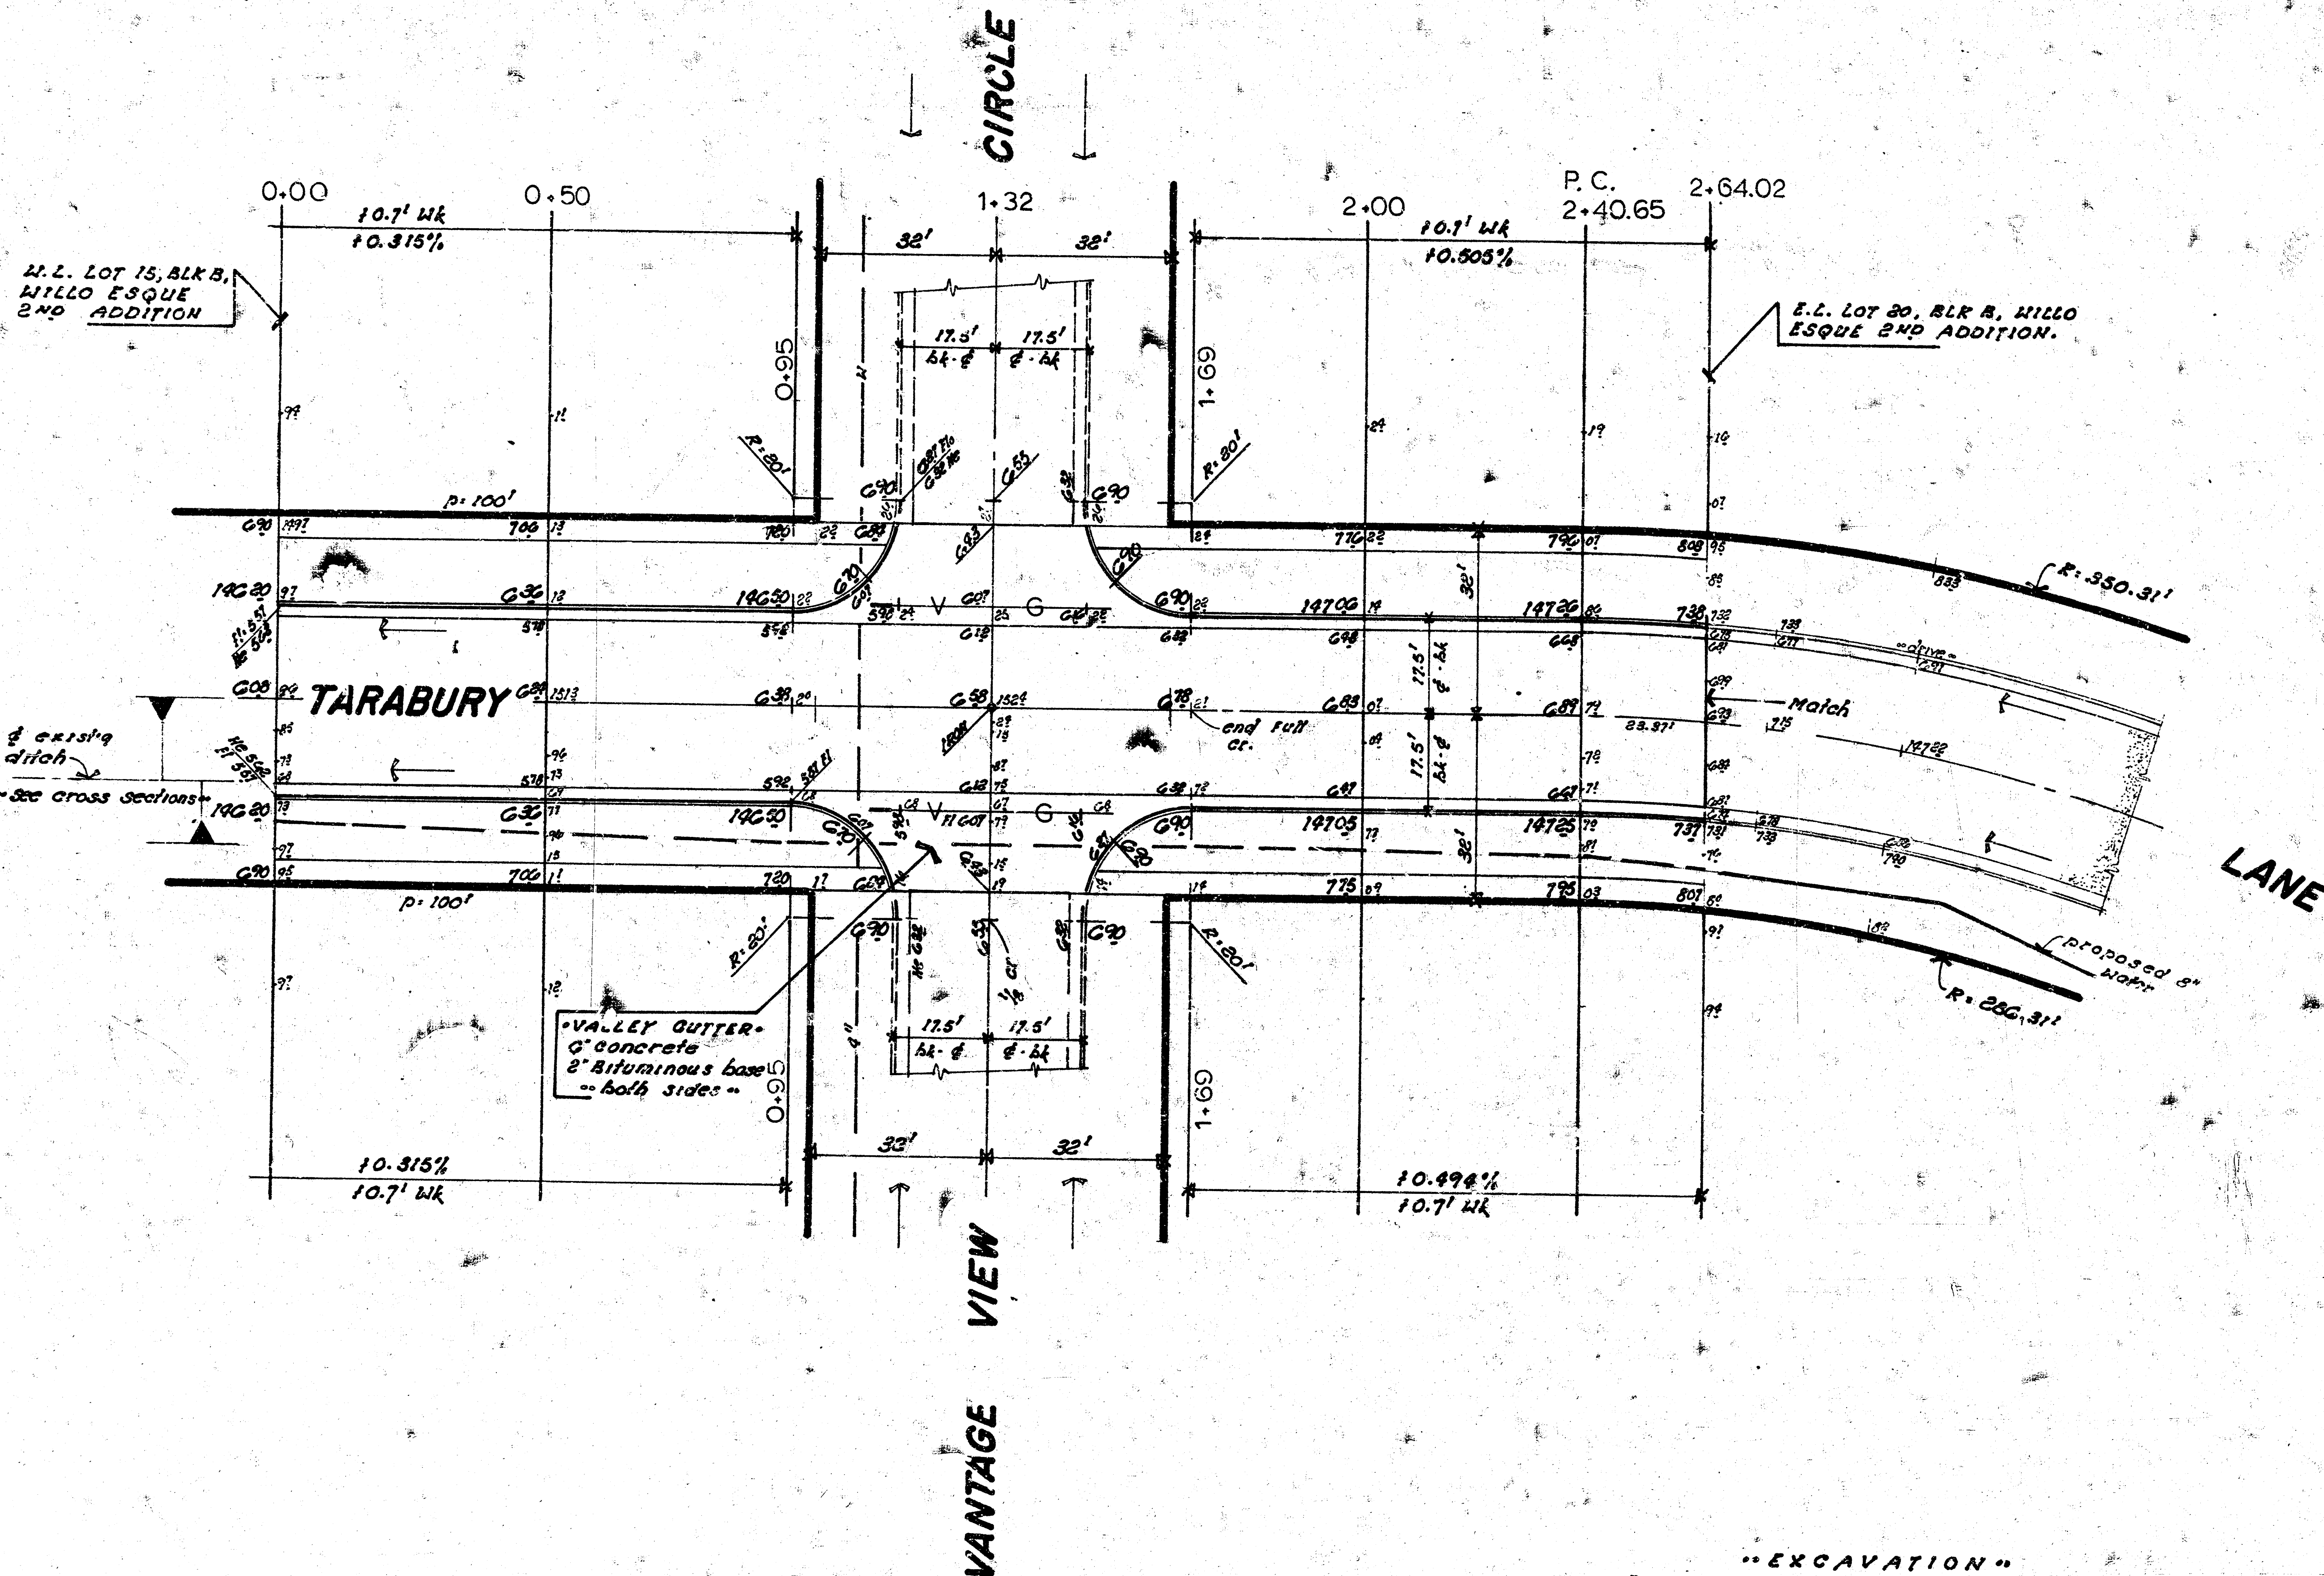

SUB-GRADE
TYPE OF SUB-GRADE TREATMENT SHALL BE DE-
TERMINED BY THE FIELD ENGINEER. SUB-GRADE
TREATMENT MAY CONSIST OF LIME TREATMENT,
CEMENT TREATMENT, SUB-GRADE MODIFICA-
TION, OR ANY COMBINATION OF THESE.

NOTE TO FIELD ENGINEER & CONTRACTOR
Grade parking and clear right-of-way for pro-
posed sidewalk. Compact fill in sidewalk area
TO BE CONSTRUCTED BY "OTHERS".


"EXCAVATION"	
"PROPERTY"	"CITY"
1073.8 CU YDS	806.6 CU YDS
10% 107.4	10% 80.7
1341.2 CU YDS	887.3 CU YDS

NOTE: Excess excavation suitable for
compacted fill is to remain on the
site for use on proj DAKS573030.

CAUTION
UNDERGROUND
UTILITIES
Please check with K G & E or
Southwestern Bell
Telephone Co. for Location

TARABURY **LAN**
E.L. Lot 20, Blk B, Willo Esque
To W.L. Lot 15, Blk B, Willo Esque
CITY of WICHITA, KANSAS
(35' bk-bk 6" Bituminous Base - 2"
Conc Surface w/ Comb Curb &
R.W. LINN CITY ENG
DATE Sept. 1976 Proj No. DAKS573030



3
58

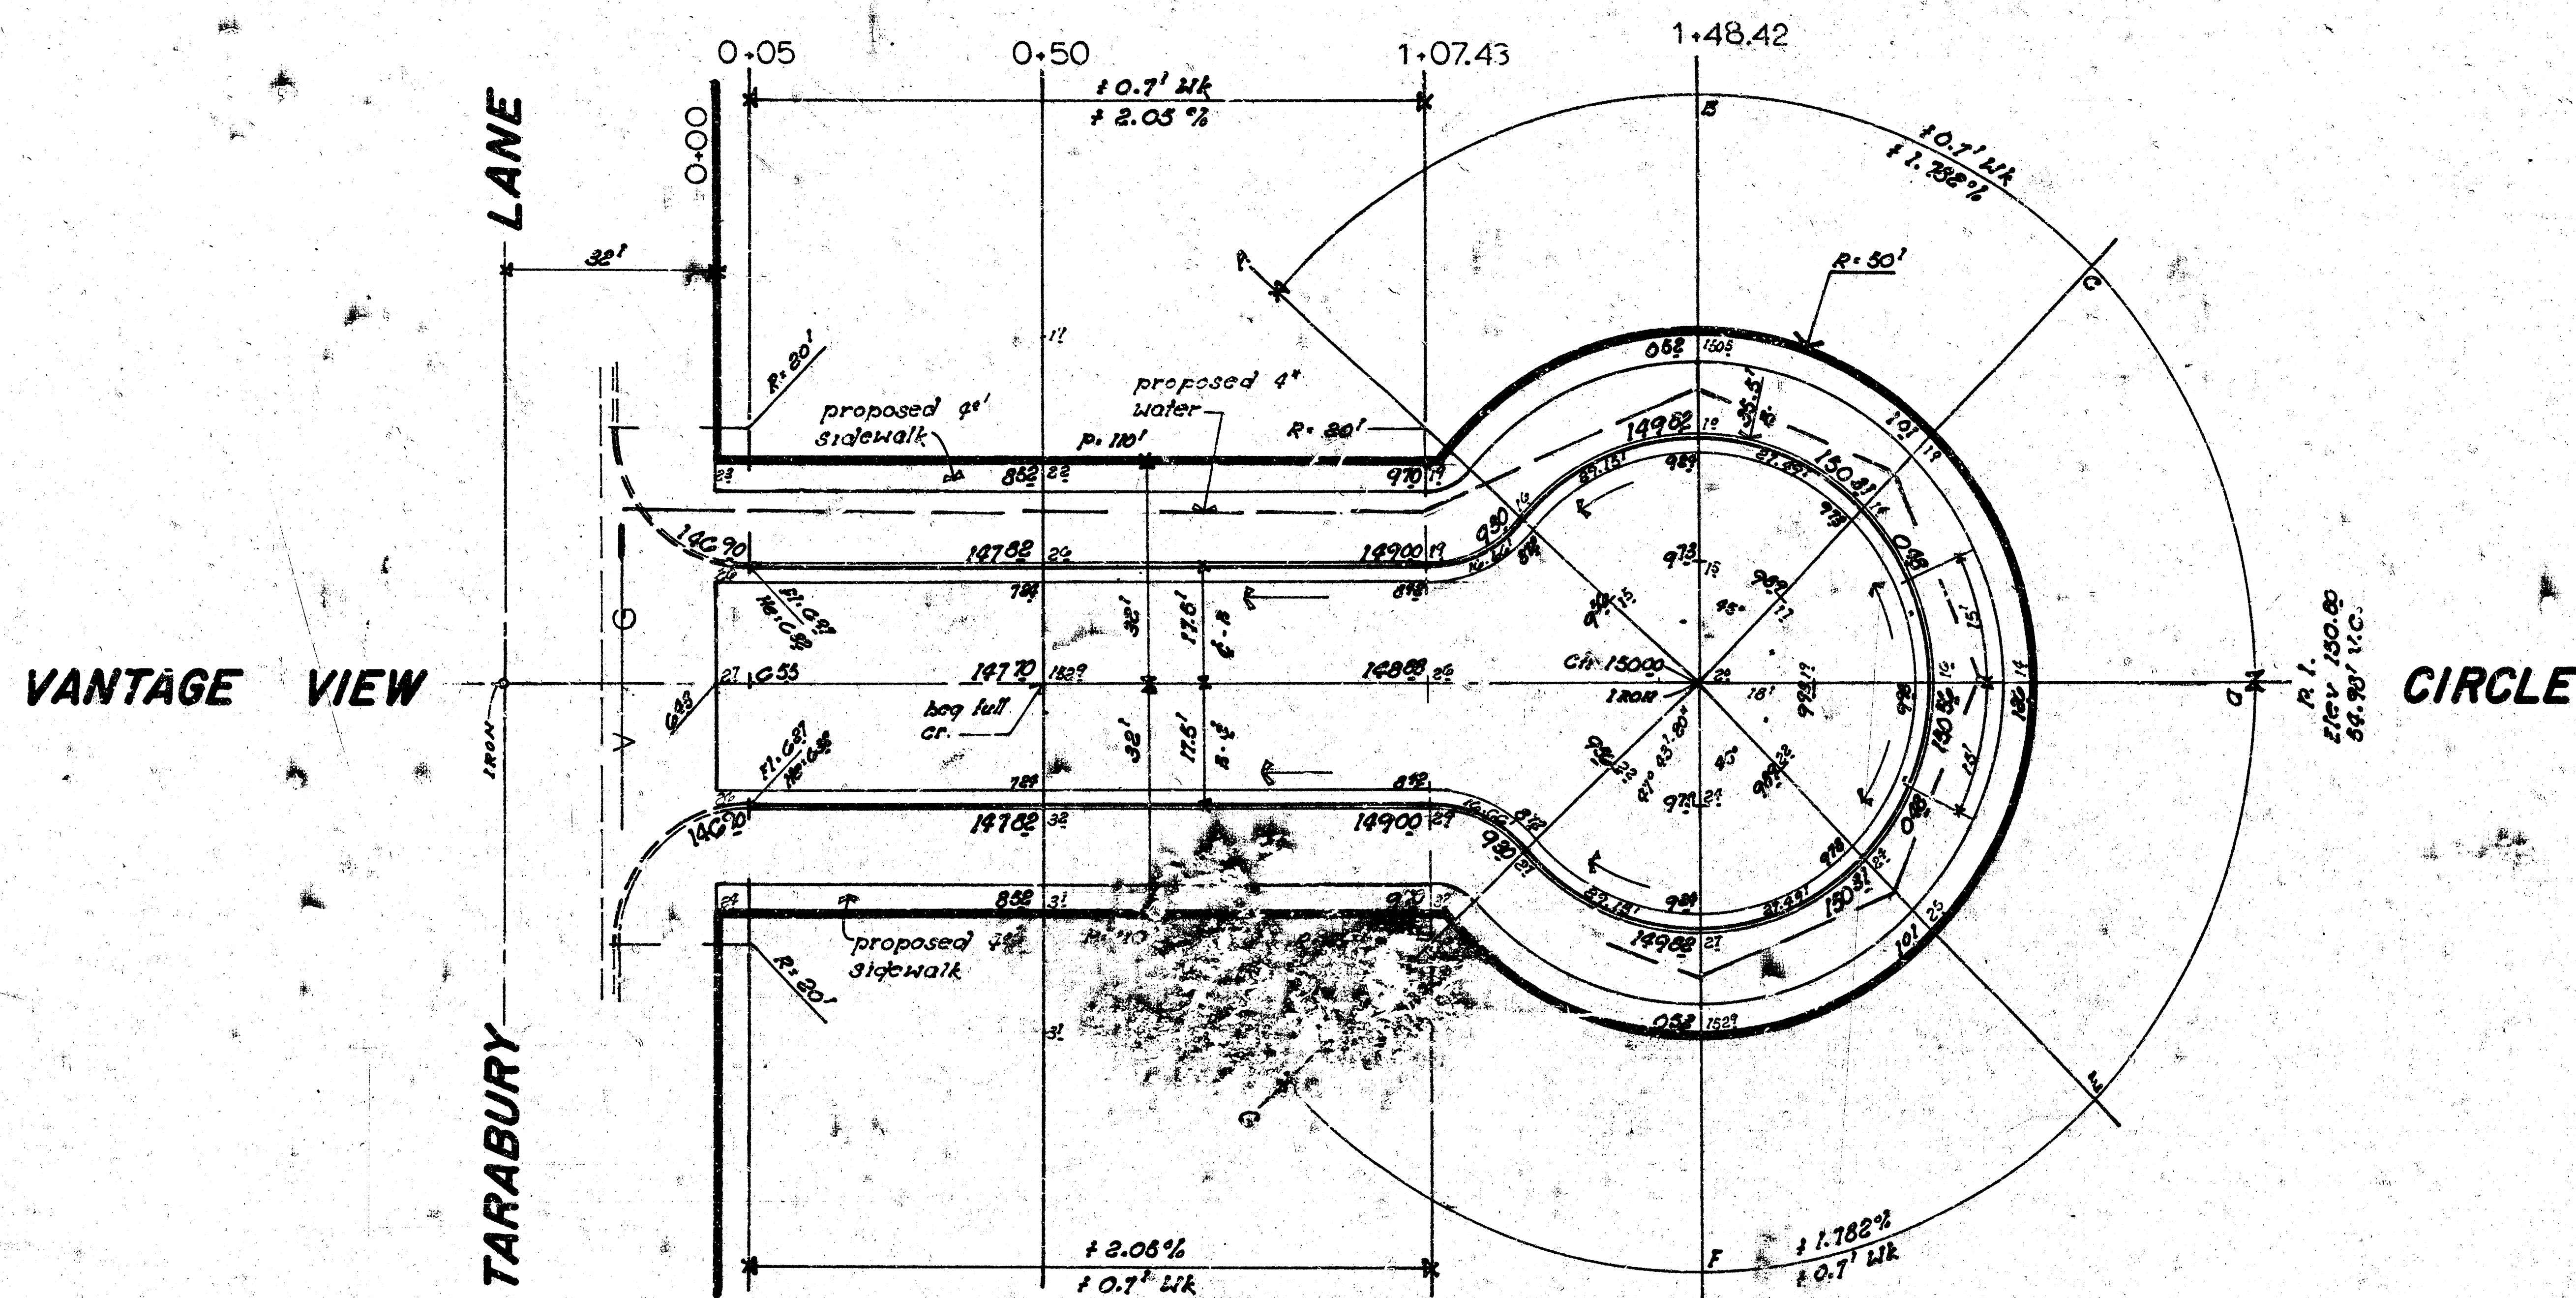

"EXCAVATION"
 1981.0 CU YDS
 110% 198.1
 2113.1 CU YDS

VANTAGE VIEW - CIR
 N.L. TARABURY LANE TO
 INCLUDING CUL-DE-SAC.
CITY OF WICHITA, KANS.
 (35' bk-bk 6" Bituminous Base - 2"
 Conc Surface w/ Comb Curb &
 R.W. LINN CITY ENGINEER
 DATE Sept. 1976 Proj No. DAKS573

48
 58

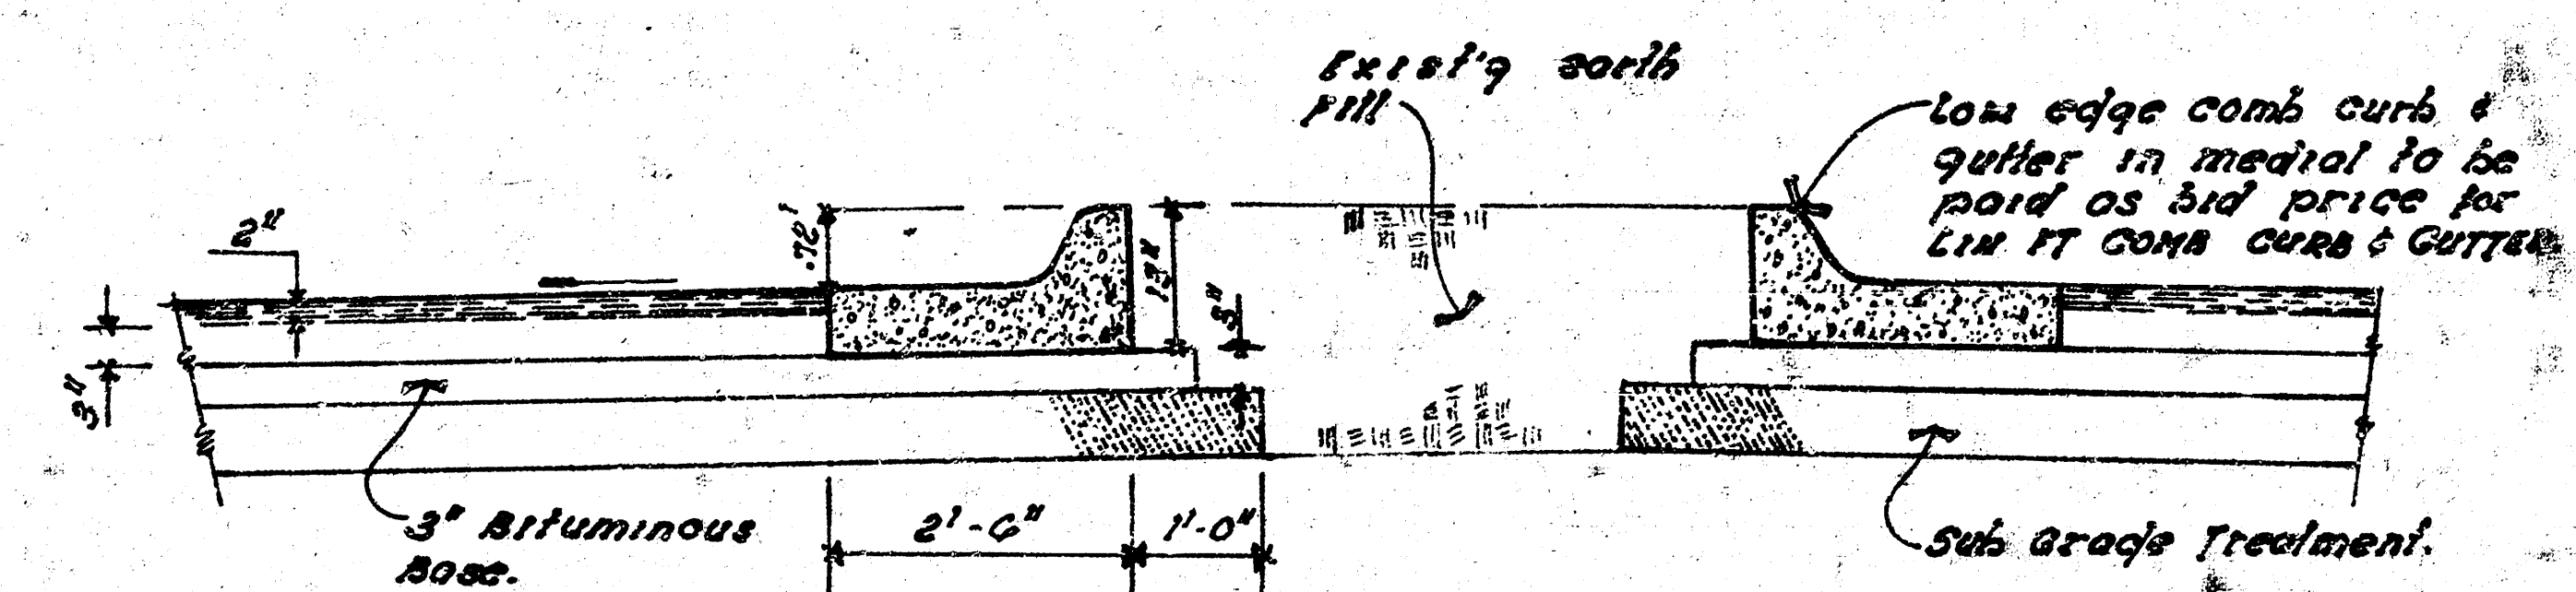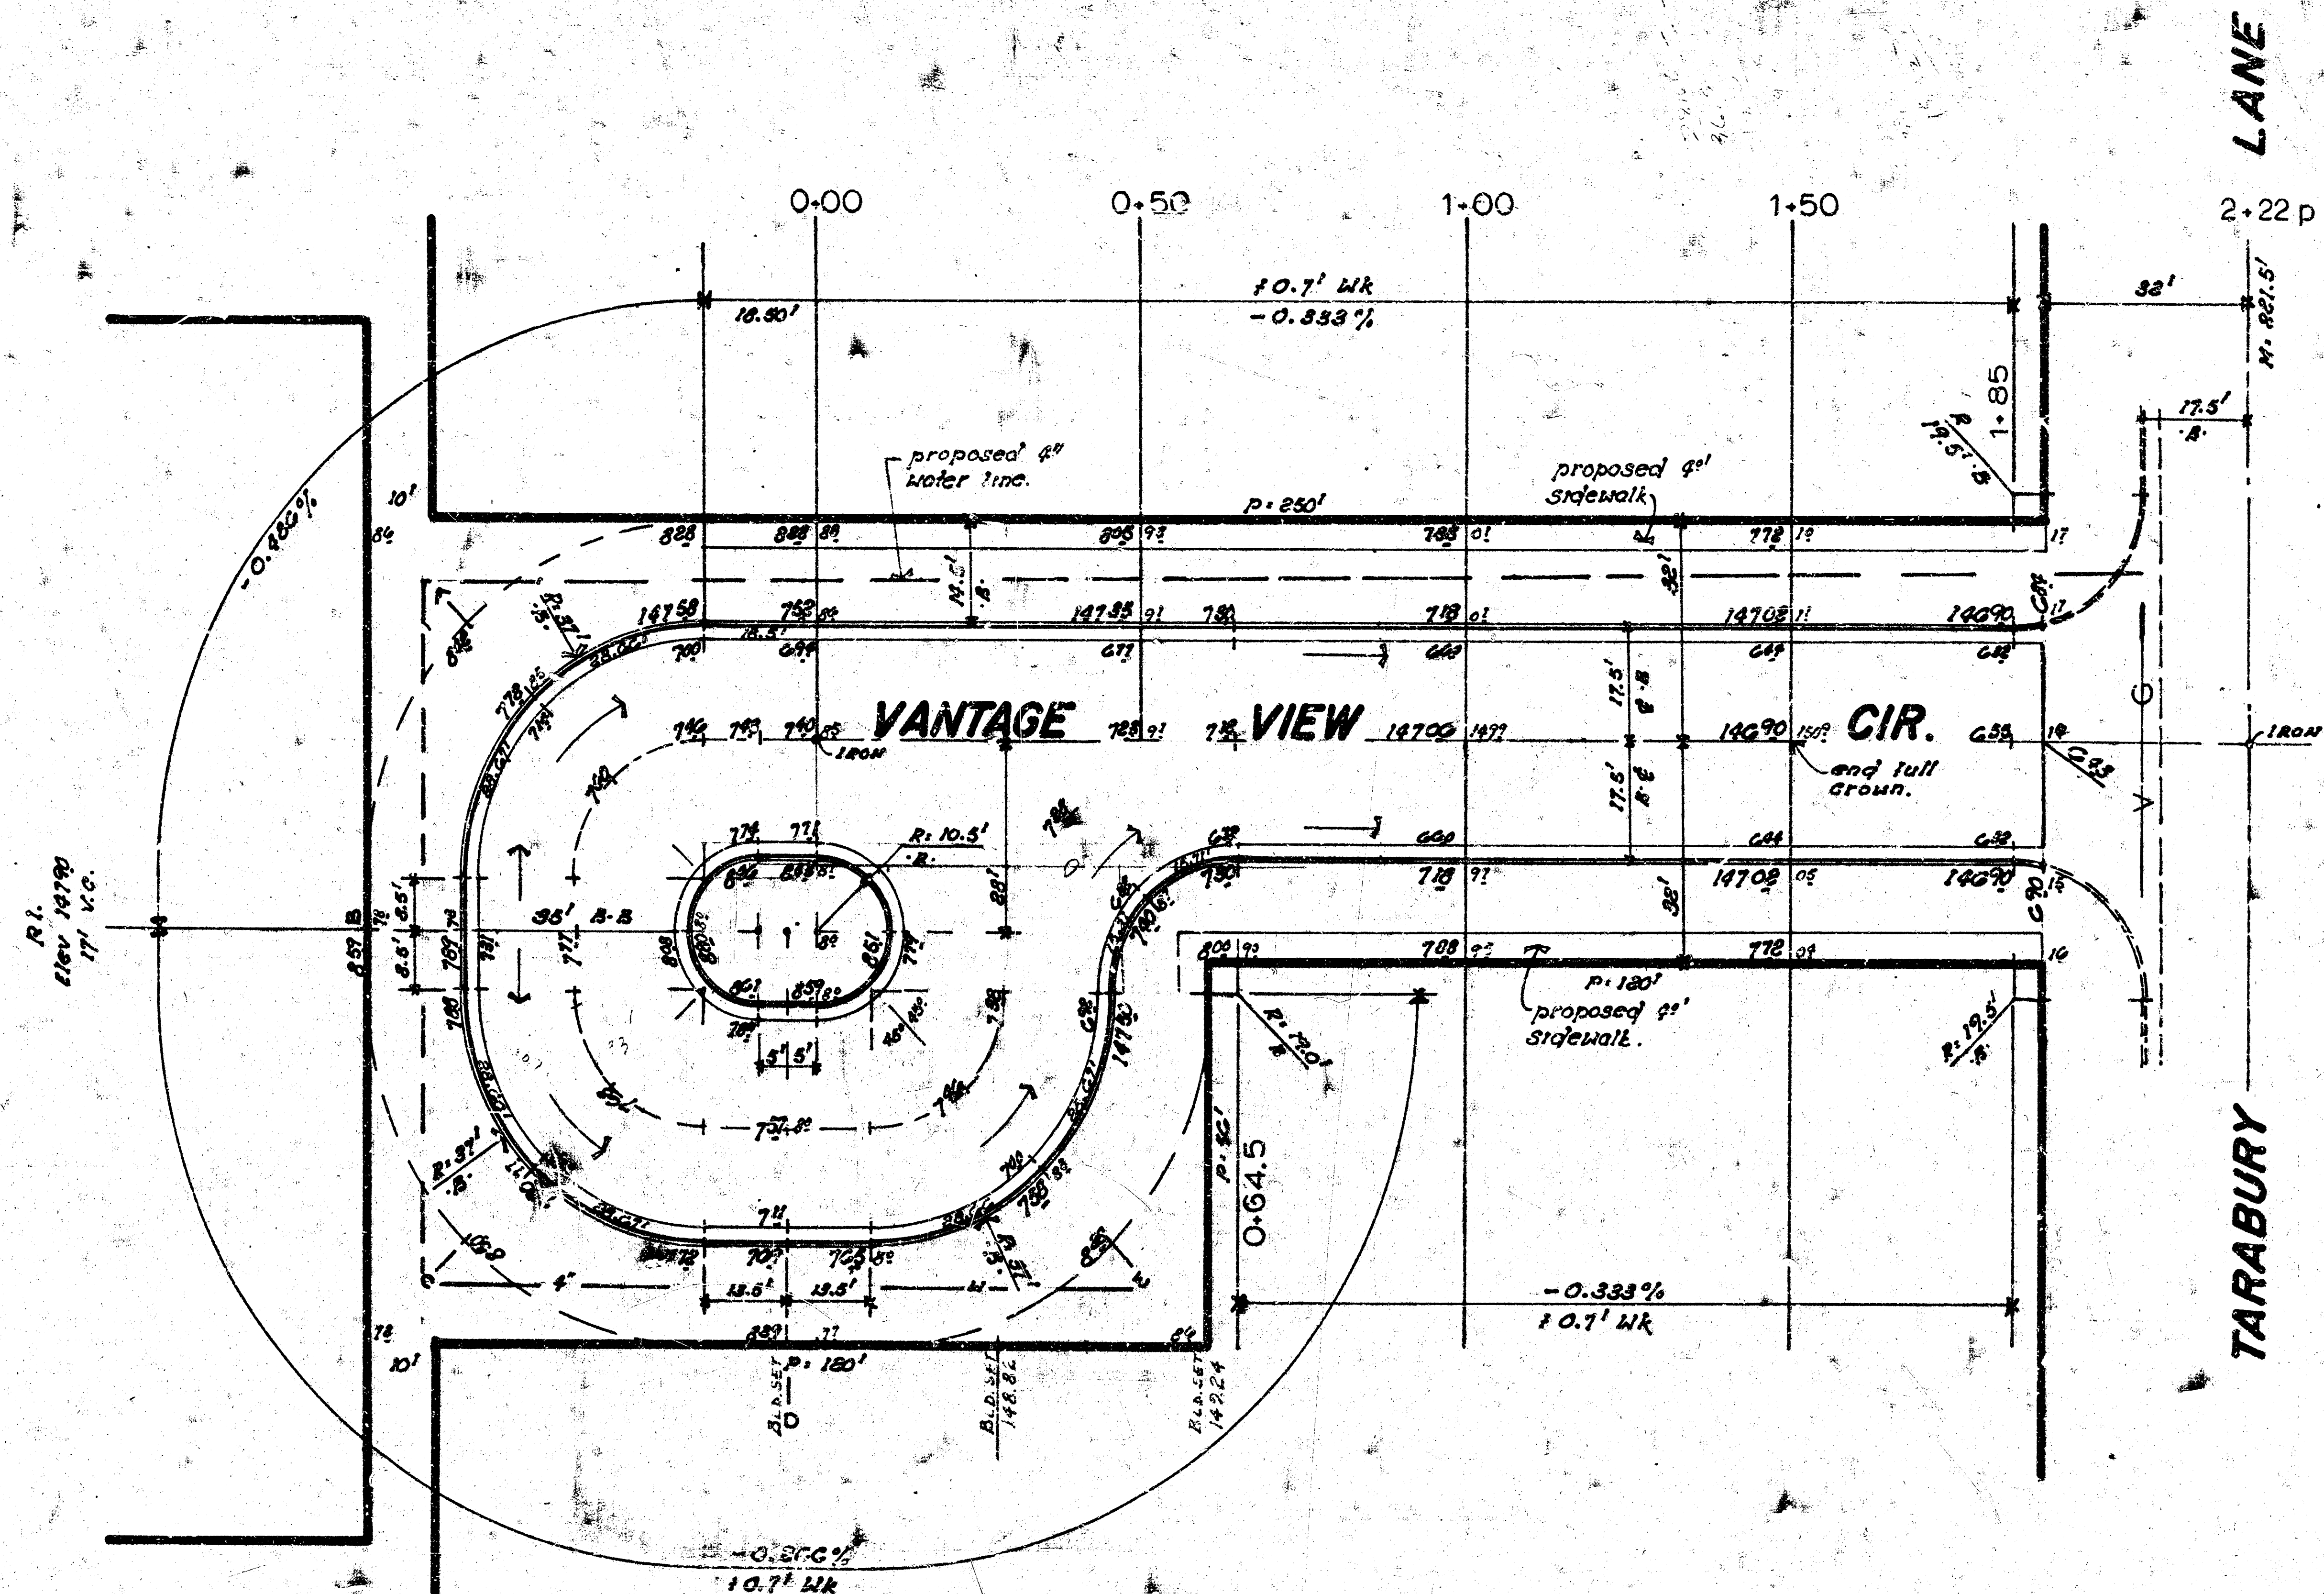

MEDIAL DETAIL

"EARTHWORK"	
EXCAVATION	COMP. FILL
1784.2 cu yds	8.3 cu yds
110% 173.6 "	110% .8 "
1696.0 cu yds	9.1 cu yds

VANTAGE VIEW C
S.L. TARABURY LANE TO
INCLUDING CUL-DE-SAC
CITY OF WICHITA, K
(35bk-bk 6" Bituminous Base
Conc Surface w/ Comb Curb
R.W. LINN CITY E
DATE Sept. 1976 Proj No. DAKS

