


B. M. 115.31 "B" in Ball ctr. of wk. No. 2
N. W. cor. 9th & Piatt.
B. M. 115.69 "B" in Spike N. side Payer Pole
@ NW cor. 9th & Minnesota.

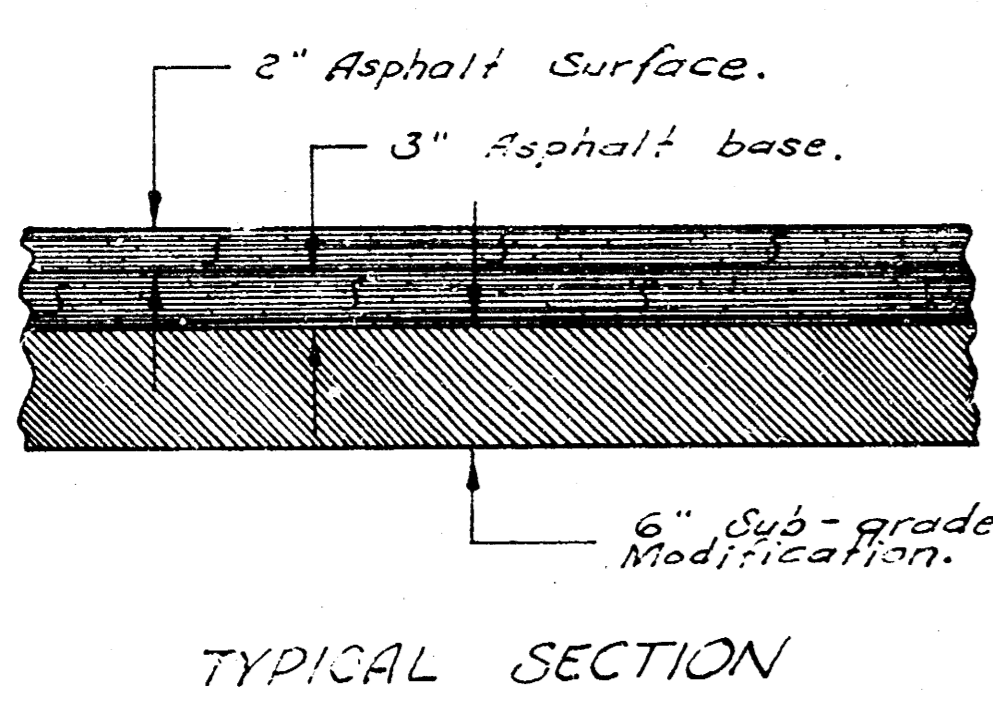

NOTE:
Remove curb.
Const. Conc. drive
to elevation
shown.

NOTE TO CONTRACTOR
This project will be constructed under
the supervision of the CITY ENGINEER
in accordance with the SPECIFICATIONS
of the CITY OF WICHITA. The CONTRACTOR
will reimburse the City of
Wichita for all cost of Engineering, Plans,
and Inspection.

NOTE TO CONTRACTOR
This project will be constructed under
the supervision of the CITY ENGINEER
in accordance with the SPECIFICATIONS
of the CITY OF WICHITA. The CONTRACTOR
will reimburse the City of
Wichita for all cost of Engineering, Plans,
and Inspection.

NOTE:
Remove curb, gutter
and sidewalk. Const. conc.
drive to elevation shown.

GENERAL NOTES

1. Contractor required to clear Right-of-Way as necessary.
2. Contractor to excavate and/or compact fill.
3. Sub-grade modification to be used as per City Engineering Specifications. Triox Weed Killer (or equal) is to be applied to sub-grade using the ratio of one gallon of weed killer to ten gallons of water at the rate of one gallon per ten sq. yards coverage.
4. 2" asphaltic concrete pavement over 6" asphalt base & asphalt surface.
5. Concrete bumper blocks (6' long) to be installed as shown on plan. Anchor with steel dowel bars.
6. Contractor to supply paint to meet City of Wichita Traffic Division specifications for striping streets. Traffic Division to do the striping of lot.

The following Bill of Materials are estimated quantities only. The Contractor shall have full responsibility for providing all materials necessary as shown on detailed plans, or as stated in related specifications to complete the project.

BILL OF MATERIALS	
1800	Sq. Yds. Asphalt Conc. base
894	Sq. ft. 6" base
62	Lin. ft. Separate curb
100	Sq. ft. of walk remove
45	Lin. ft. curb, ch and gutter Rem.
48	Lin. ft. of saw joint
7	Sq. yds. pavement Rem.
185	Cu. yds. of 6" subgrade modification
18	Cu. yds. excavation fill
150	Cu. yds. compacted fill
10	Cu. yds. Estimated borrow material
60	6'-6" x 6" bumper blocks
	Right of Way clearing as required

PARKING LOT
NORTH OF NINTH ST.
MINNESOTA AVE. TO PIATT AVE.
WICHITA - SEDGWICK COUNTY
DEPARTMENT OF COMMUNITY HEALTH
MAY 1970

