



ACCEL-DECEL IMPROVEMENTS FOR CENTRAL AVENUE TO SERVE LOT 4 AND THE EAST 600 FEET OF LOT 1

PROJECT NO.

472-76-245-81561-000-000-001

INDEX

1. TITLE SHEET
2. TYPICAL SECTIONS
- 3-4. CENTRAL ACCEL DECEL PLANS
- 5-6. EARTHWORK SECTIONS
- 7-II. LANE STRIPING PLANS

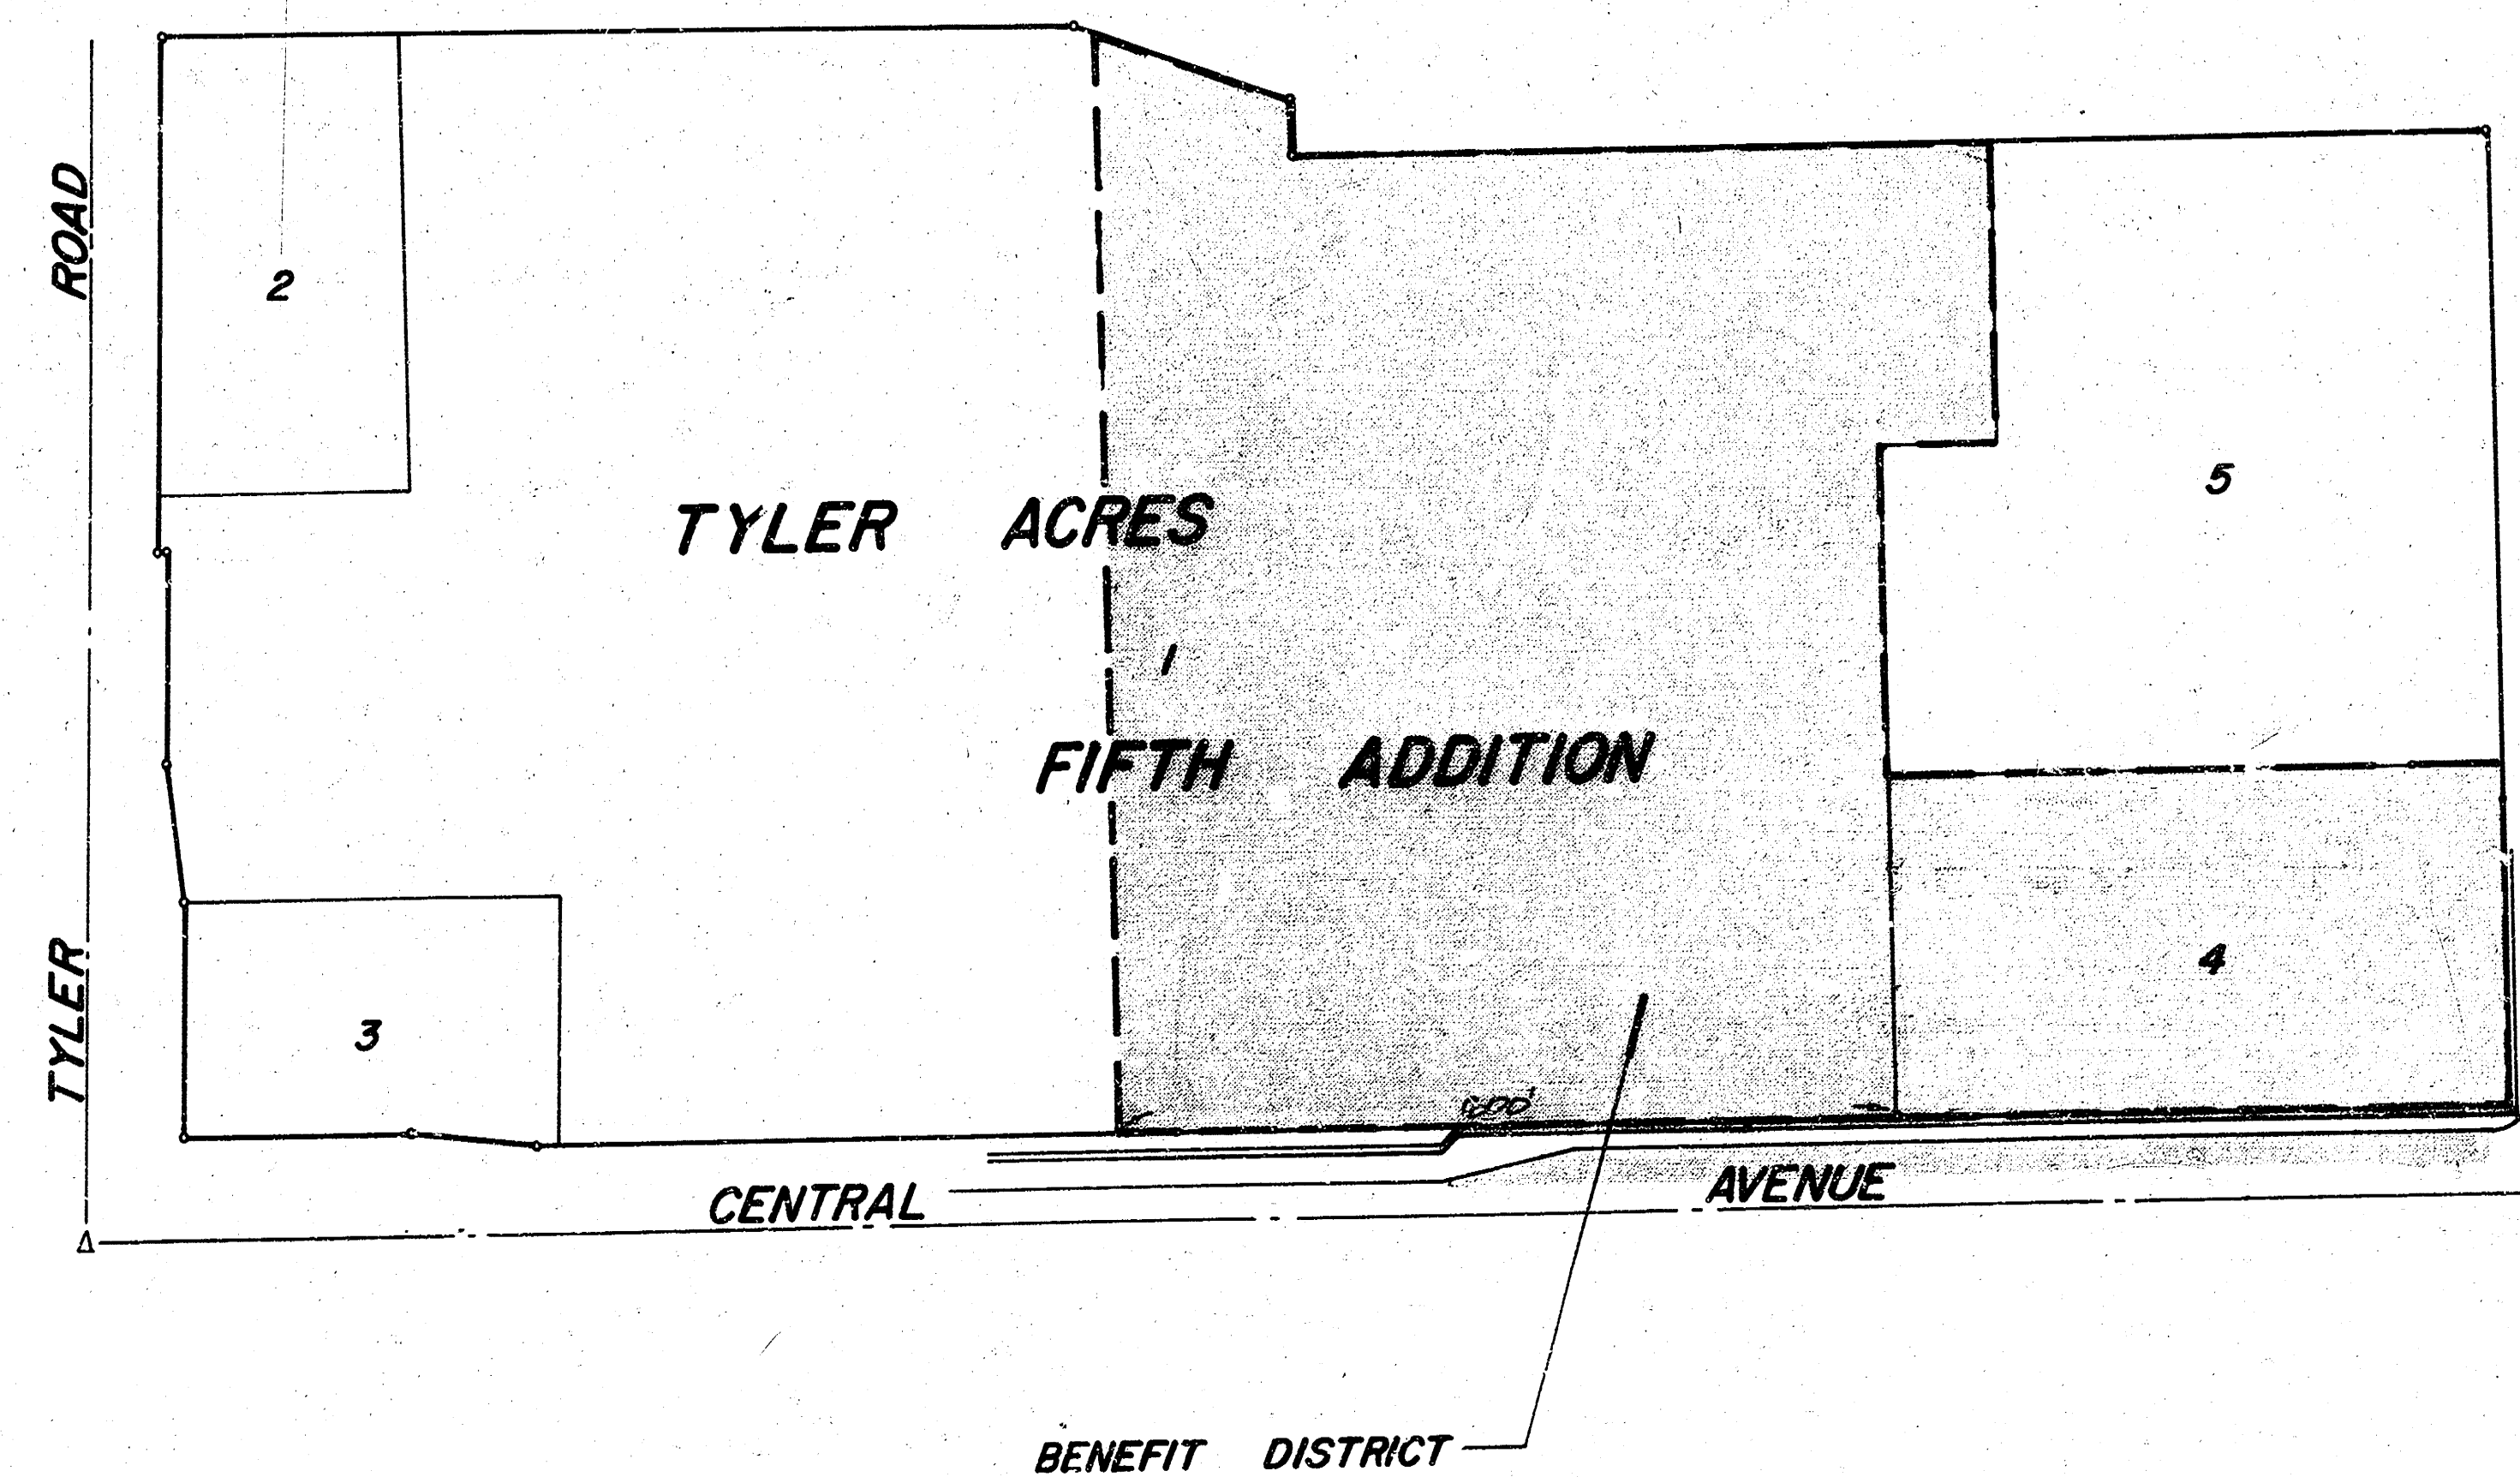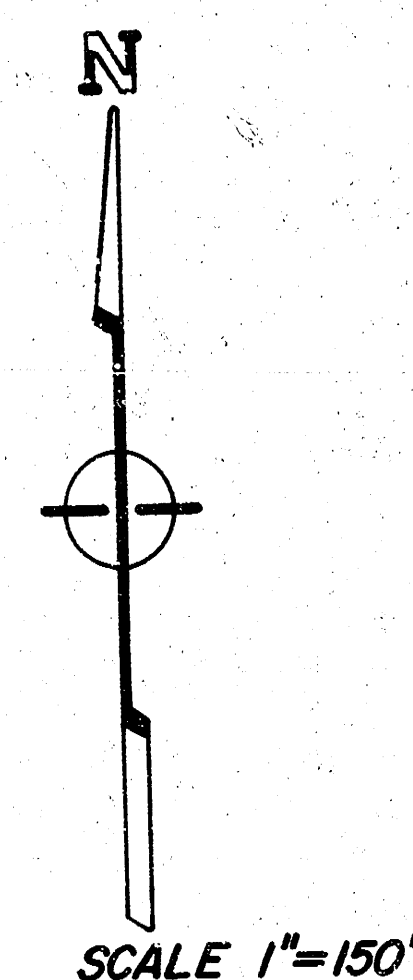

GENERAL NOTES

1. Utility service lines, poles, valve boxes, meters, and structures are to be adjusted as necessary by others prior to construction unless the plans specifically call for their adjustment by the Contractor or unless the plans specifically identify a utility to be adjusted by its owner during construction. Existing utilities and their location, as shown on the plans, represent the best information obtainable for design. The contractor will be required to work around existing utilities within the right-of-way which do not conflict with proposed construction.
2. A saw cut of at least one-half the depth of existing surface courses or one-fourth the depth of the existing total pavement thickness shall be provided at locations where proposed construction abuts an existing surface course or pavement for which partial removal of that surface or pavement is required. Sawed joint to facilitate removal within three (3) feet of existing joints will not be permitted and for such instances the limits of removal shall extend to the existing joint. Such saw cuts will not be paid for directly and this cost shall be considered as subsidiary to the removal of the surface or pavement.
3. No more than 2 Drives 30 feet in width, or equivalent combinations thereof, are to be constructed with this project.
4. Limits of earthwork shall match existing ground elevations at the right-of-way line unless otherwise noted on the plans with a new finished grade elevation. When a new finished grade elevation is shown, the earthwork shall extend one foot beyond the right-of-way line and then sloped up or down using permissible slopes to match the existing ground surface.
5. The Contractor will be permitted to bid only one of the alternate types of subgrade treatment. The type bid by the successful bidder will be the type of subgrade treatment used to construct the project.
6. The Contractor shall be responsible for preserving property irons. The Contractor will be required to re-establish any property irons which are damaged or destroyed by his construction operations. Such irons shall be re-established by a licensed land surveyor or a licensed professional engineer in accordance with state laws.
7. Driveway widths and locations shown on the plan are tentative. Contractor will be required to obtain properly executed driveway request form signed by property owner or his authorized representative verifying such driveway widths and locations. Such forms shall be submitted to the Engineer for his review and approval.
8. The Contractor is to make the necessary arrangements with Grandy's restaurant prior to construction in order to provide access to Grandy's thru at least one opening at all times during the construction phase. Contact Grandy's at least 48 hours prior to beginning construction of the project.
9. The Contractor is to provide for proper traffic signing and barricading of the area through out the construction phase of the project. This also includes proper signing and barricading during the lane striping process on Central Avenue.
10. Contact Ed Neville (722-1730) for on site locations to place dirt from Decel Lane Excavation.
11. TRAFFIC TO BE MAINTAINED ON CENTRAL AT ALL TIMES.

CITY OF WICHITA, KANSAS


MICHAEL E. LINDEBAK

CITY ENGINEER

BENCH MARK: CITY OF WICHITA D233, 562' NORTH
E 23' WEST OF 8 CENTRAL & TYLER
ELEVATION 143.00 CITY DATUM

BENCH MARK: "C" CUT ON BACK OF SIDEWALK OPP-
OSITE SOUTHWEST CORNER LOT 4
TYLER ACRES 5TH ADDITION.
ELEVATION 143.66 CITY DATUM


BENCH MARK: "D" CUT ON CURB RETURN AT THE
NORTHWEST CORNER OF CENTRAL
AVENUE AND SOCORA STREET.
ELEVATION 143.66 CITY DATUM

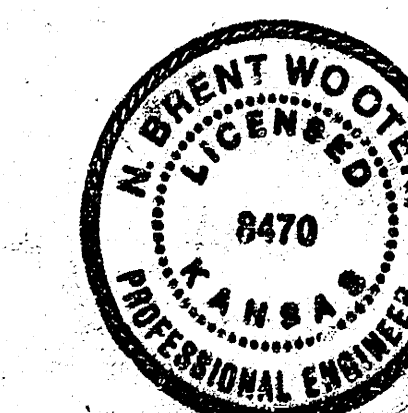

REVISED: FEBRUARY 1987
REVISED: DECEMBER 1996
AUGUST 1996


BAUGHMAN COMPANY P.A.
SURVEYING & ENGINEERING
316-252-7271 • 316 ELLIS • WICHITA, KANSAS 67211

FILMED FROM THE BEST
AVAILABLE COPY

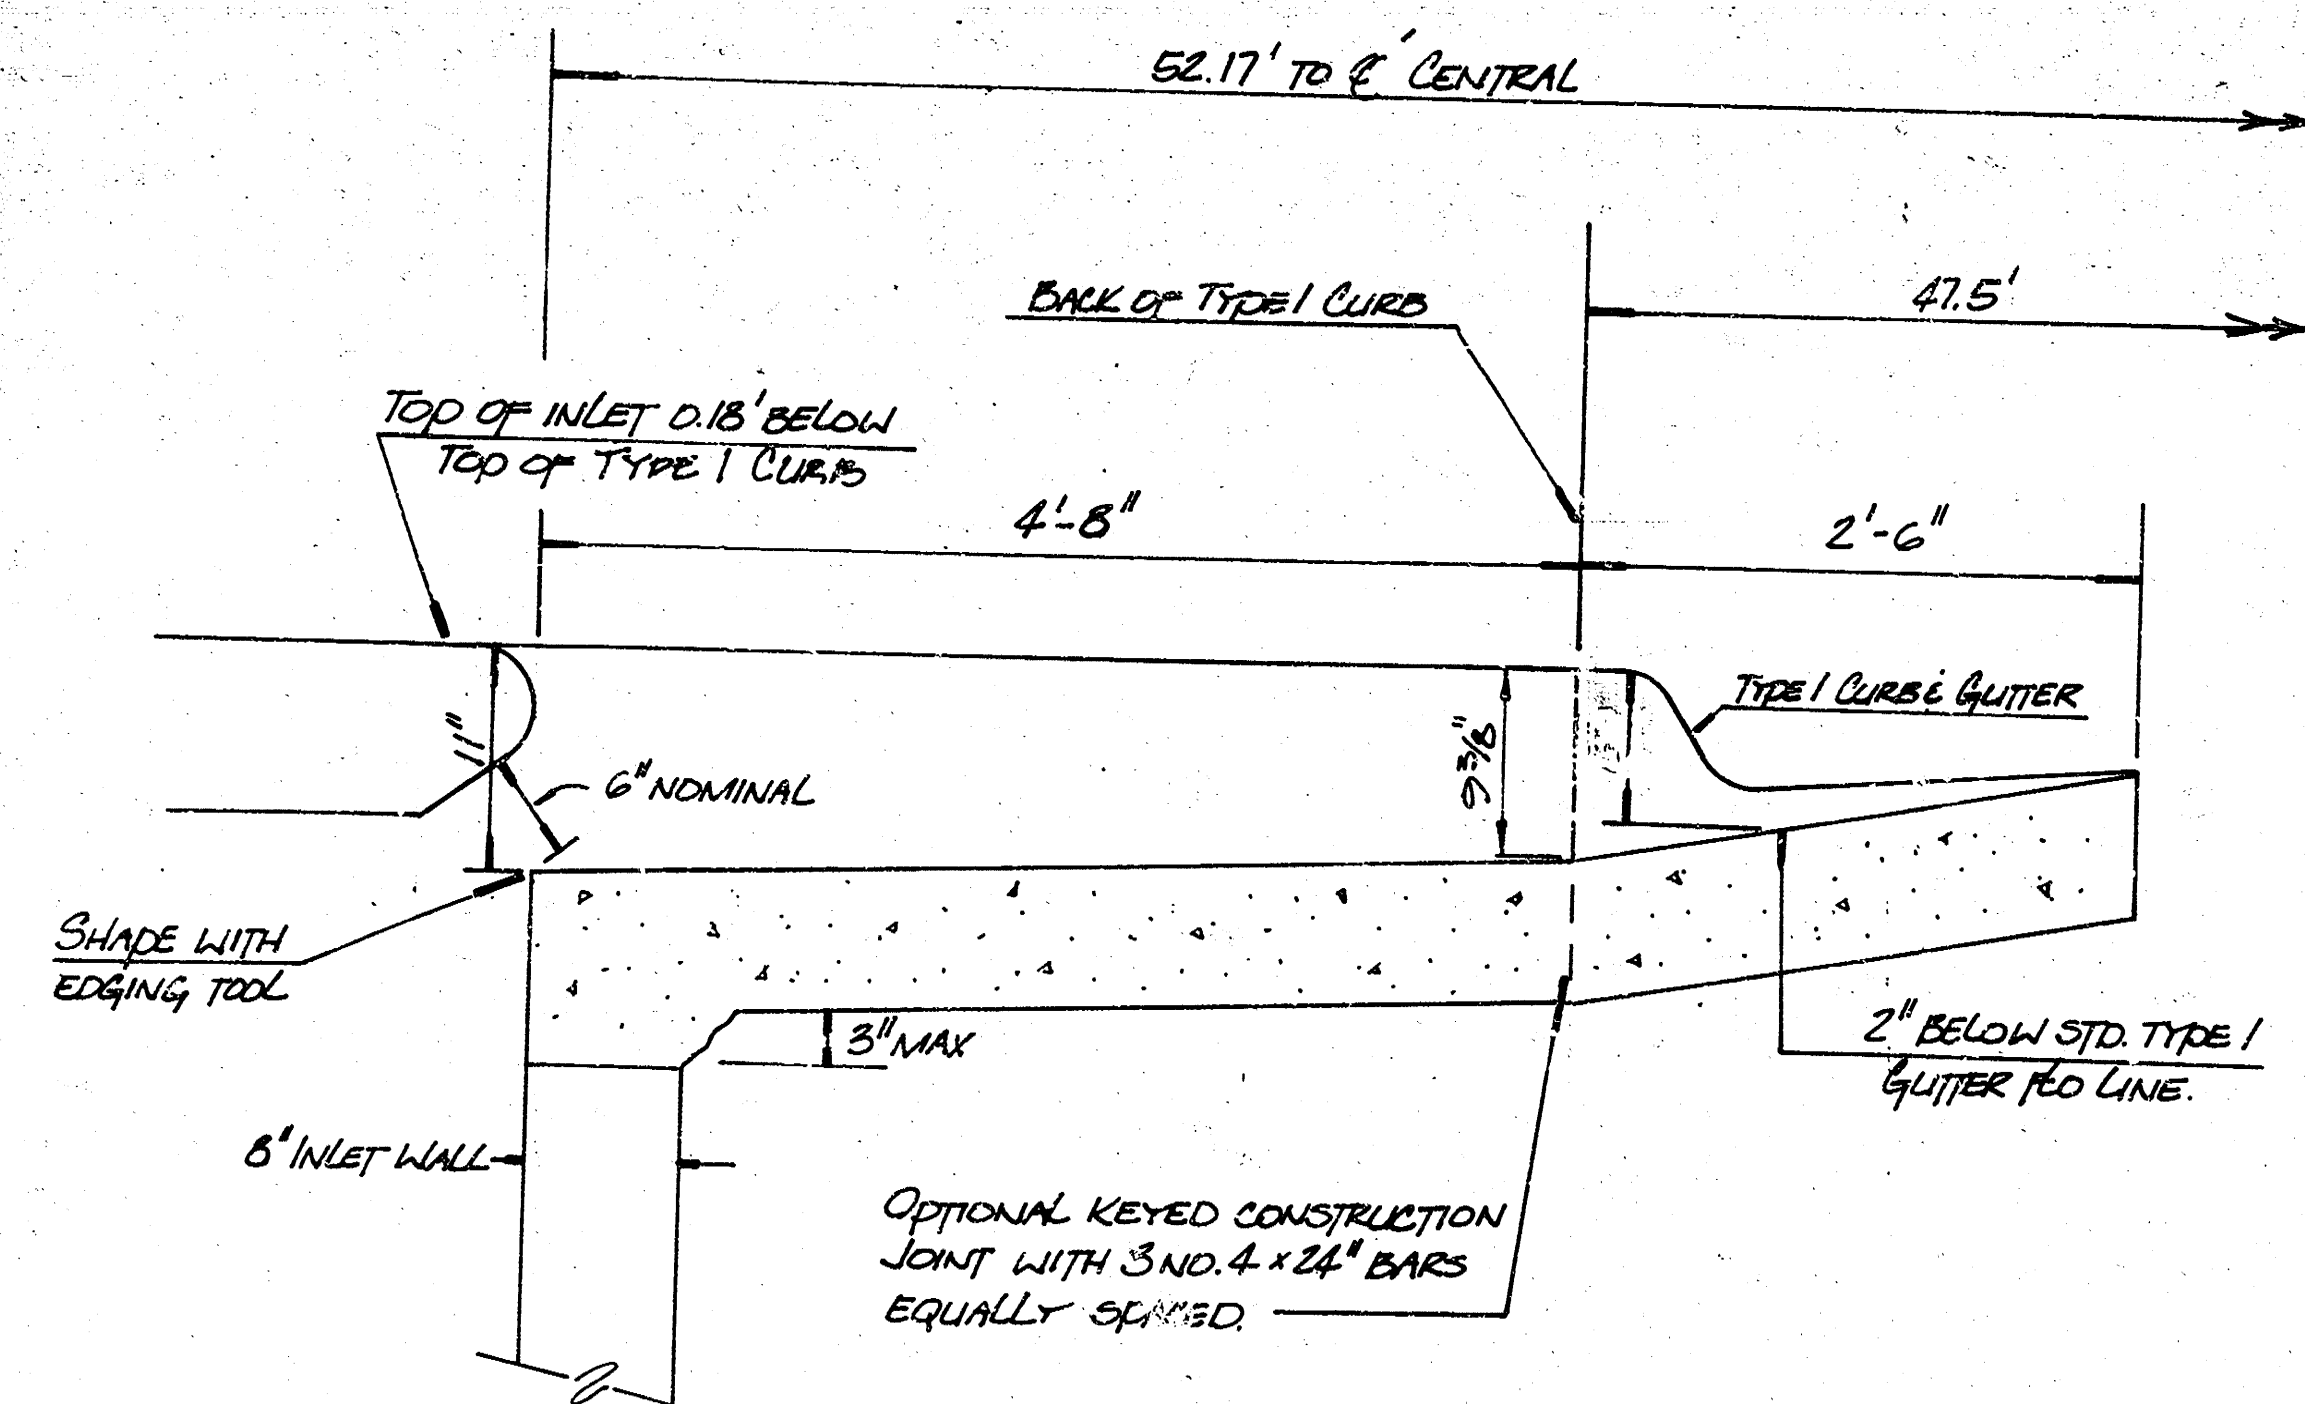


DETAIL - SPECIAL TYPE 1A INLET HOOKUP

NOTE: THE SAW JOINT AND THE ASPHALT SURFACE REMOVAL AND REPLACEMENT SHALL ALL BE CONSIDERED AS INCIDENTAL TO "ST-10" A.C. PAVEMENT (4" 8" BITUMINOUS BASE).
THE EXISTING SURFACE COURSE MAY BE THICKER THAN 2" WHICH WILL REQUIRE A LEVELING COURSE TO BE CONSTRUCTED AS SHALL BE DETERMINED BY THE ENGINEER. THE COST OF ANY LEVELING COURSE SHALL ALSO BE INCIDENTAL TO "ST-10" A.C. PAVEMENT (4" 8" BITUMINOUS BASE).

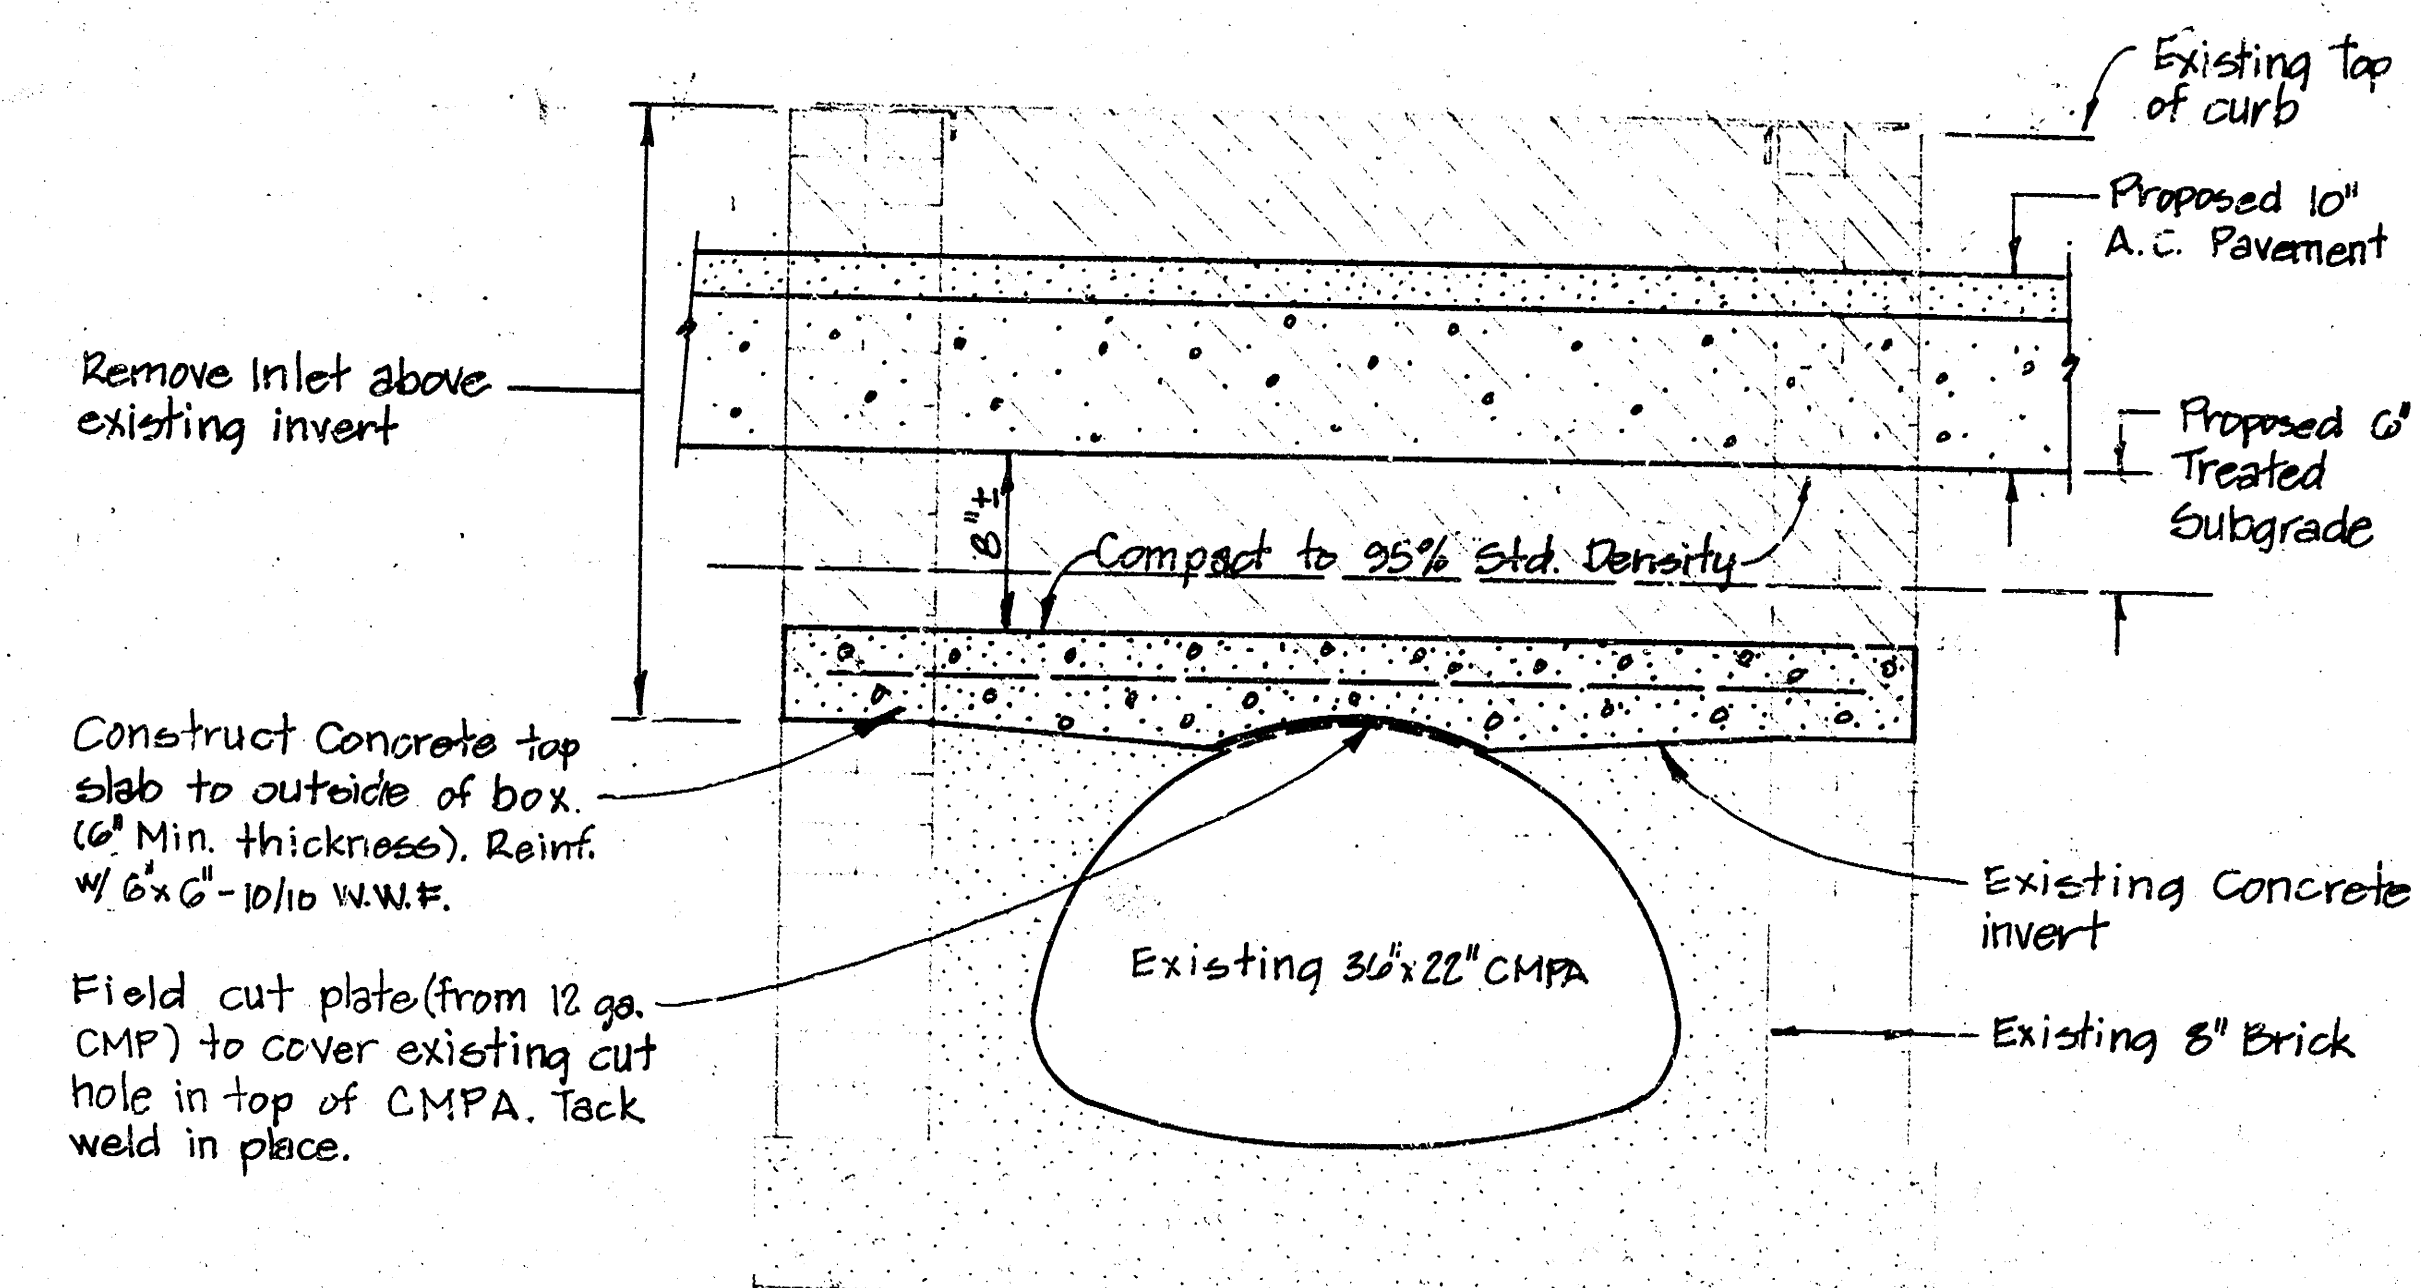


INLET REMOVAL DETAIL

NOTE: THE INLET TOP & SIDE REMOVAL NECESSARY FOR THIS MODIFICATION AS WELL AS THE INSTALLATION AND CONSTRUCTION OF THE FILLER PLATE. NO CONCRETE SLAB TOP SHALL ALL BE PAID FOR AS "CURB INLET REMOVAL AND MODIFICATION" FOR EACH INLET UNIT.

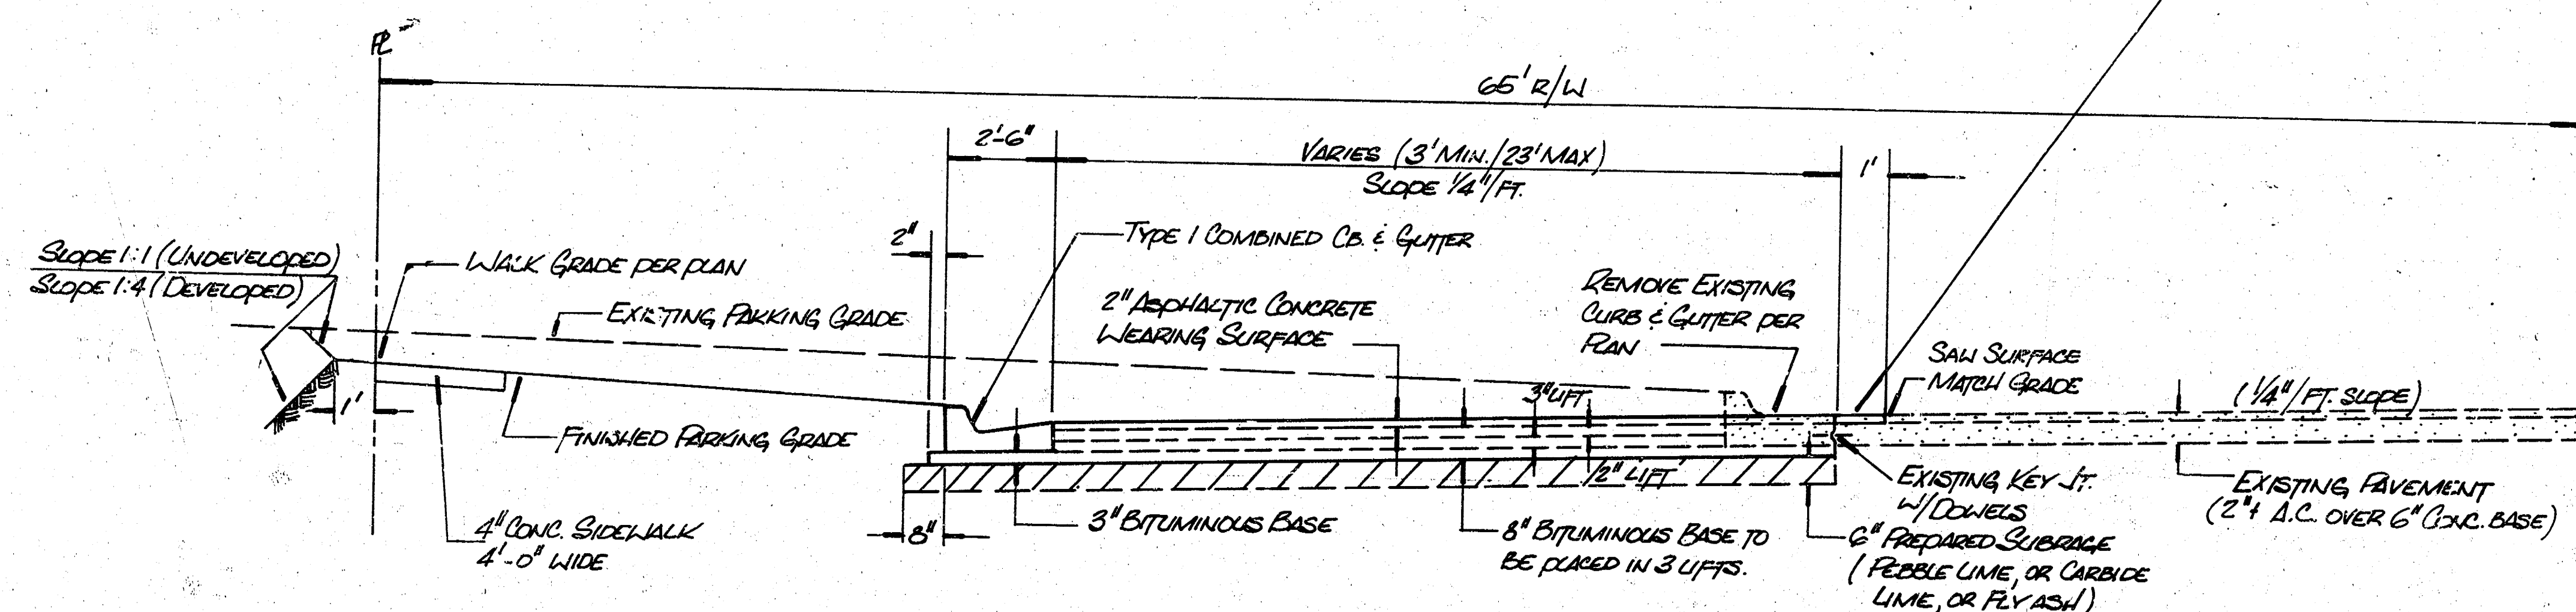


TYPICAL SECTION
10" ASPHALTIC CONCRETE PAVEMENT
(8" BITUMINOUS BASE)

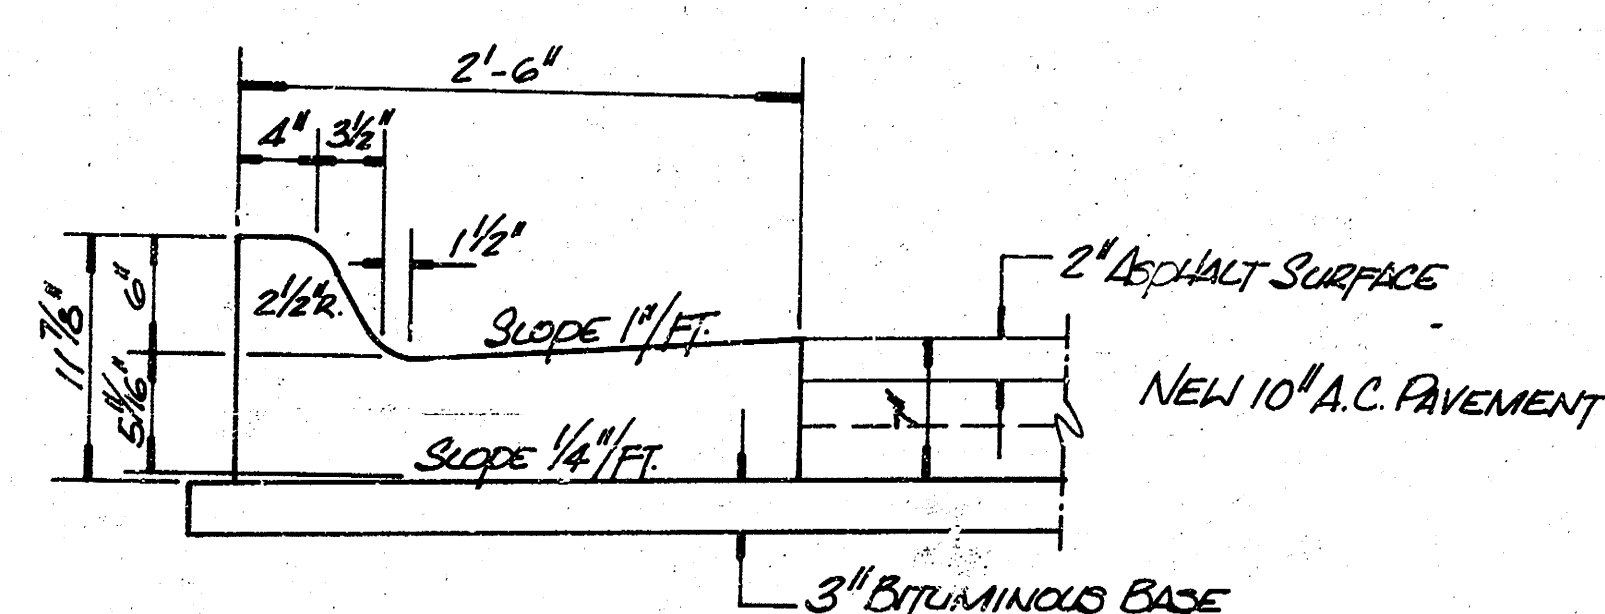

TYPE 1 COMBINED CURB & GUTTER

NOTE: EXTRA LENGTH OF GUTTER SHALL BE INCIDENTAL TO L.F. TRANSITION CURB & GUTTER

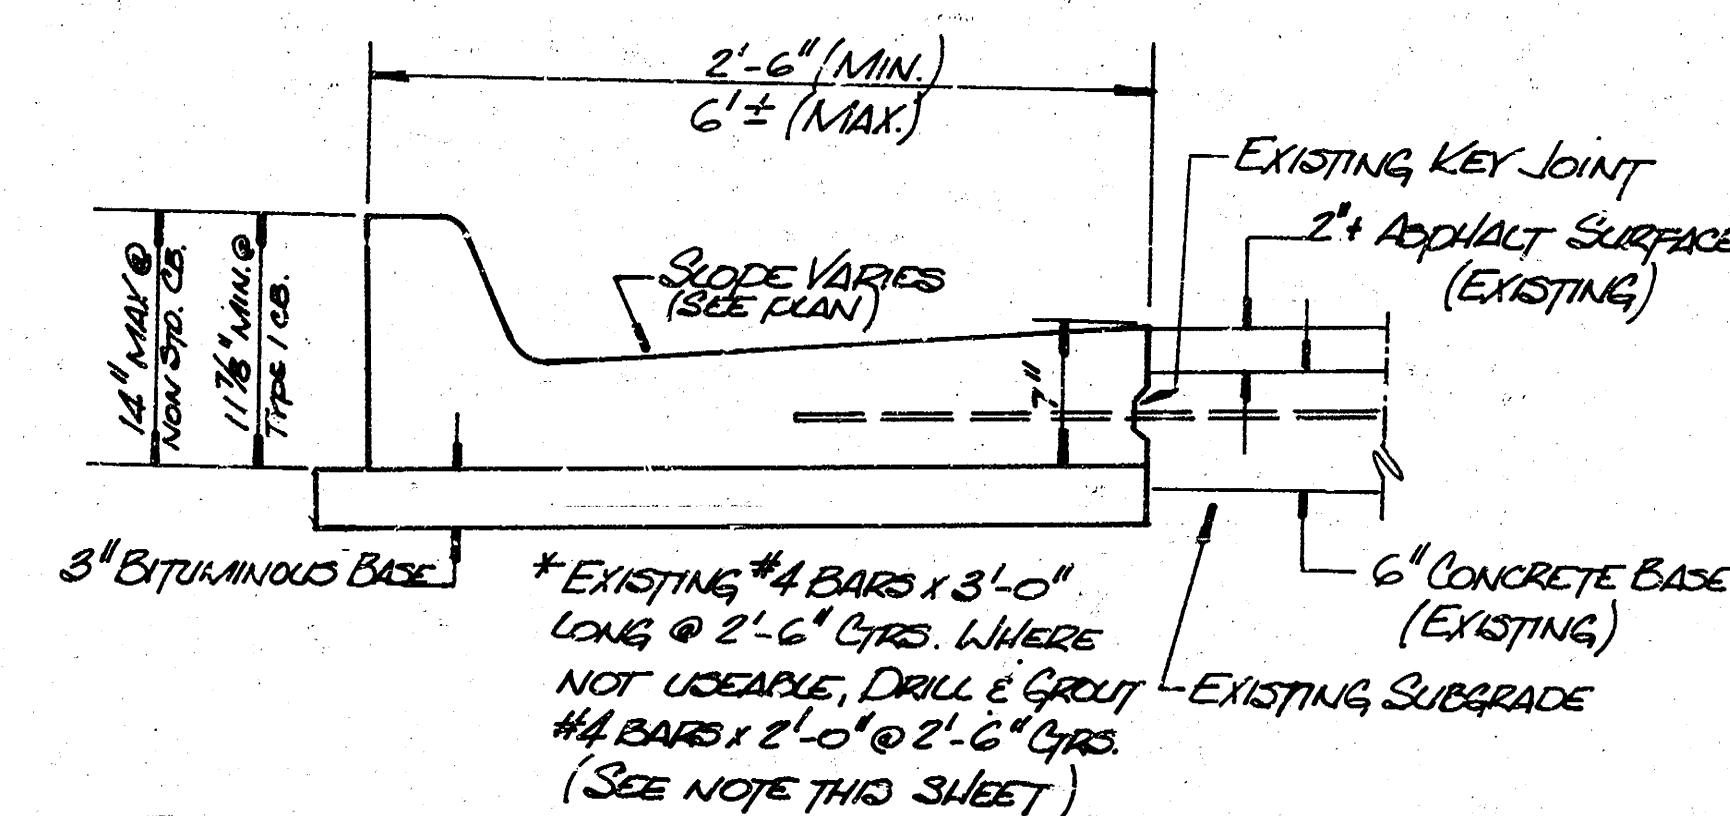

TRANSITION CURB & GUTTER

NOTE: THE TRANSITION CURB & GUTTER SECTION SHALL BE PAID FOR AS "L" TYPE 1 COMBINED CURB & GUTTER


CENTRAL AVE. ACCEL-DECEL
STREET IMPROVEMENTS

PROJECT NO. 472-76-245-81561-000-000-001

NO SCALE

FILMED FROM THE BEST
AVAILABLE COPY

A hand-drawn compass rose with 'N' at the top and a scale 'SCALE 1" = 20' at the bottom right. The rose is a circle with a cross inside, and the 'N' is written above it. The scale is written in cursive at the bottom right.

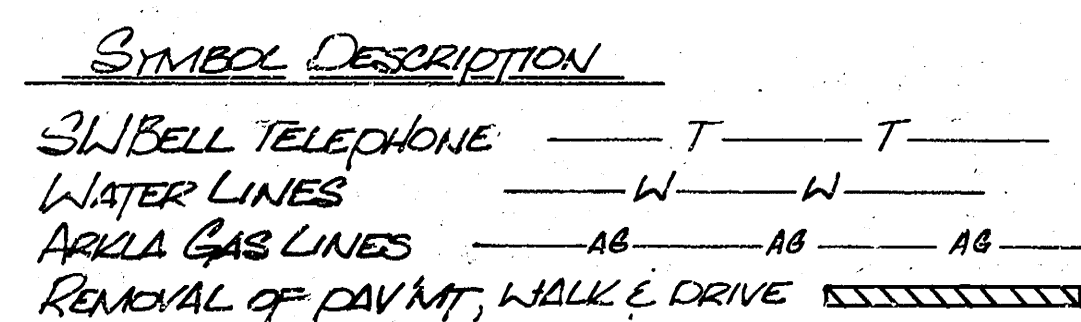A circular professional engineer seal for N. Brent Wooten. The outer ring contains the text "N. BRENT WOOTEN" at the top and "PROFESSIONAL ENGINEER" at the bottom. The inner circle contains the word "LICENSED" at the top, the license number "8470" in the center, and the word "KANSAS" at the bottom.

FILMED FROM THE BEST
AVAILABLE COPY



BENCH MARK: CITY OF WICHITA DIS. 56.2' NORTH
 235' WEST OF E. CENTRAL & TYLER
 ELEVATION: 148.95 CITY DATUM

BENCH MARK: 11" CUT ON BACK OF SIDEWALK OP-
 POSITE SOUTHWEST CORNER LOT 4
 TYLER ACRES 5TH ADDITION.
 ELEVATION 148.06 CITY DATUM

BENCH MARK: 11" CUT ON CURB RETURN AT THE
 NORTHWEST CORNER OF CENTRAL
 AVENUE AND SOCORA STREET.
 ELEVATION 148.66 CITY DATUM


NOTE: CONTRACTOR TO CONTACT OWNER OF
 GRANDY'S IN ORDER TO MAKE APP-
 PROPRIATE ARRANGEMENTS FOR CONS-
 DERATIONS TO PROVIDE FOR TRAFFIC FLOWS

SAW JOINT, REMOVE & RECONSTRUCT INLET RADIUS
 TO MATCH NEW PAVEMENT ALIGNMENT. COST OF
 REMOVAL & REPLACEMENT TO BE INCIDENTAL TO
 LF TYPE I COMBINED CURB & GUTTER

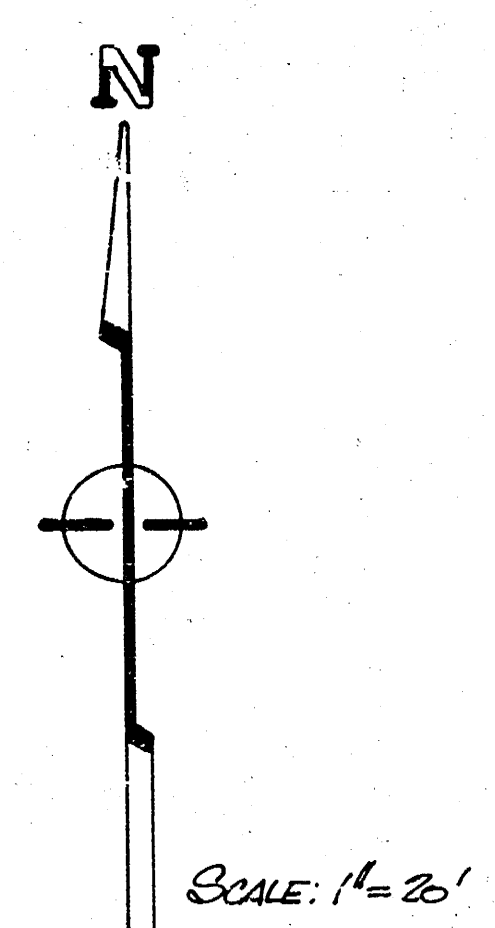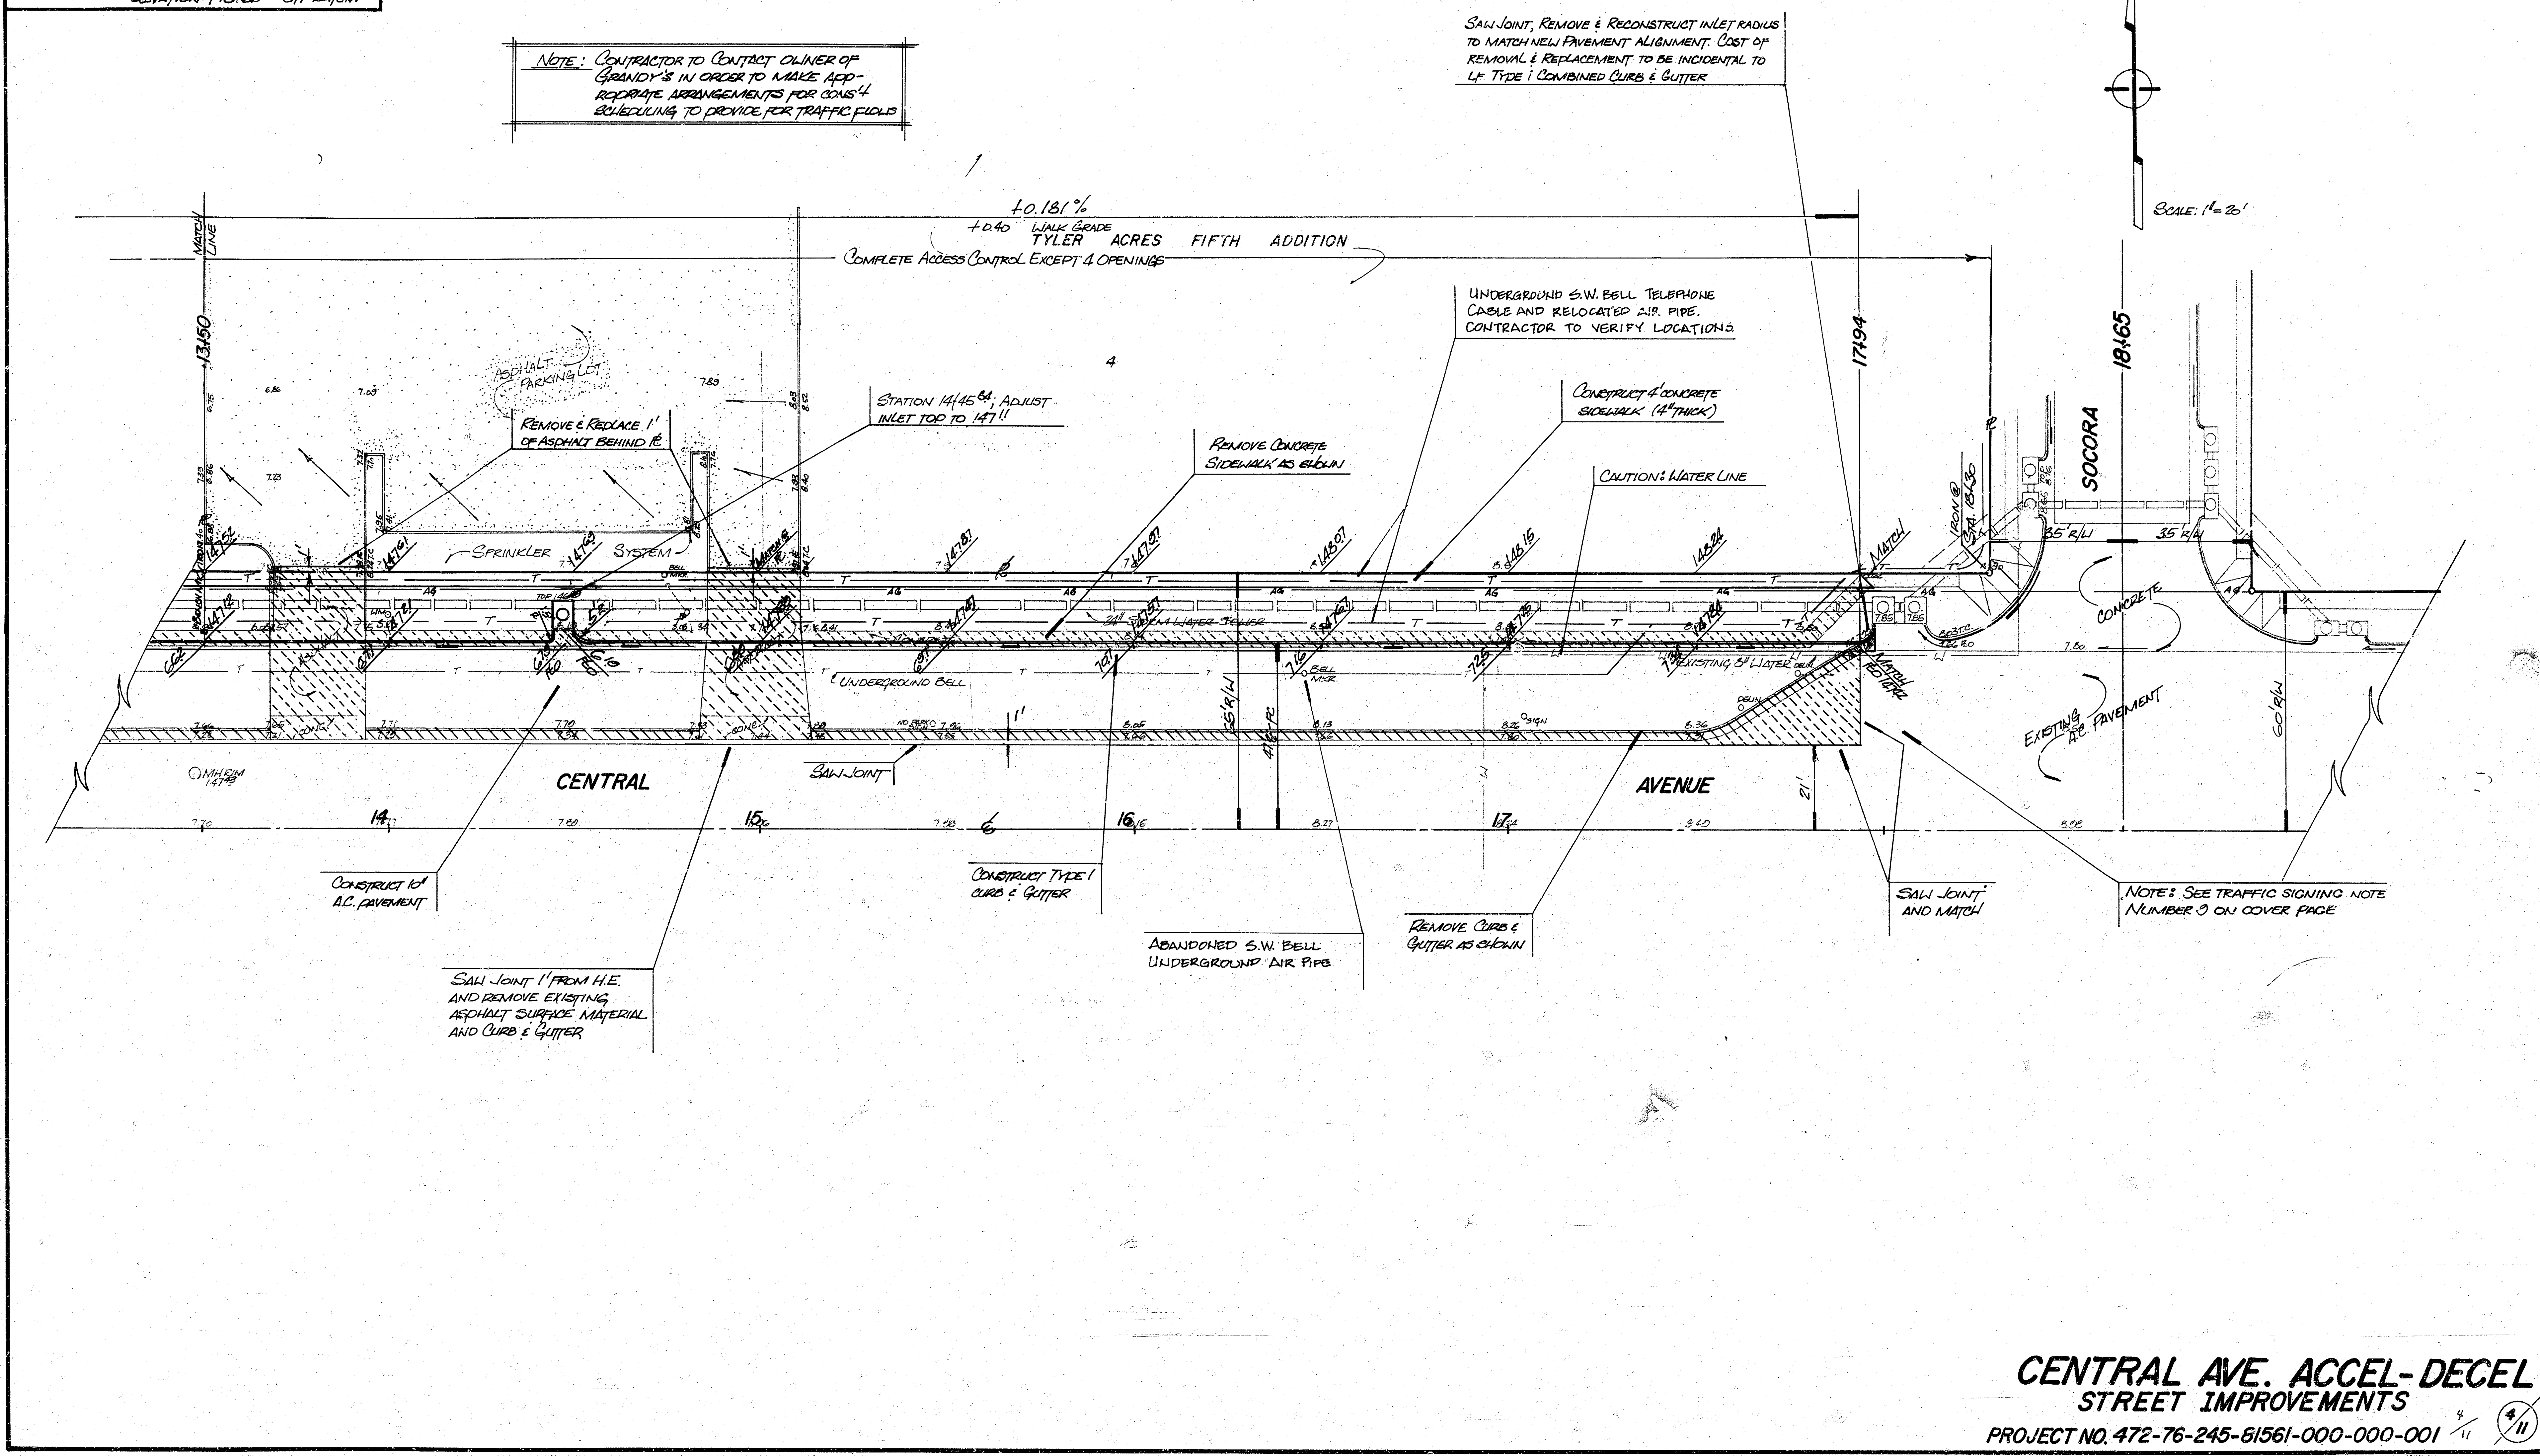


**CENTRAL AVE. ACCEL-DECEL
 STREET IMPROVEMENTS**
 PROJECT NO. 472-76-245-81561-000-000-001 4/11

FILMED FROM THE BEST
 AVAILABLE COPY

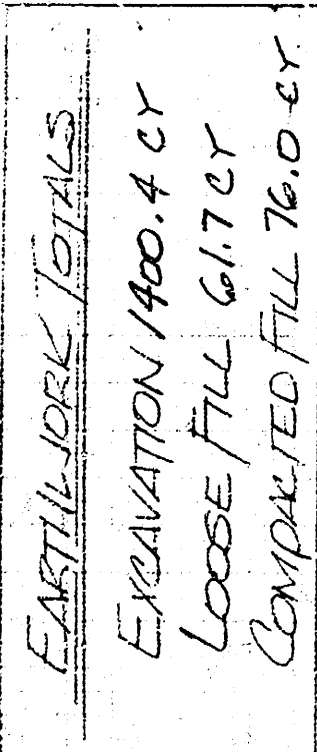

FILMED FROM THE BEST
AVAILABLE COPY

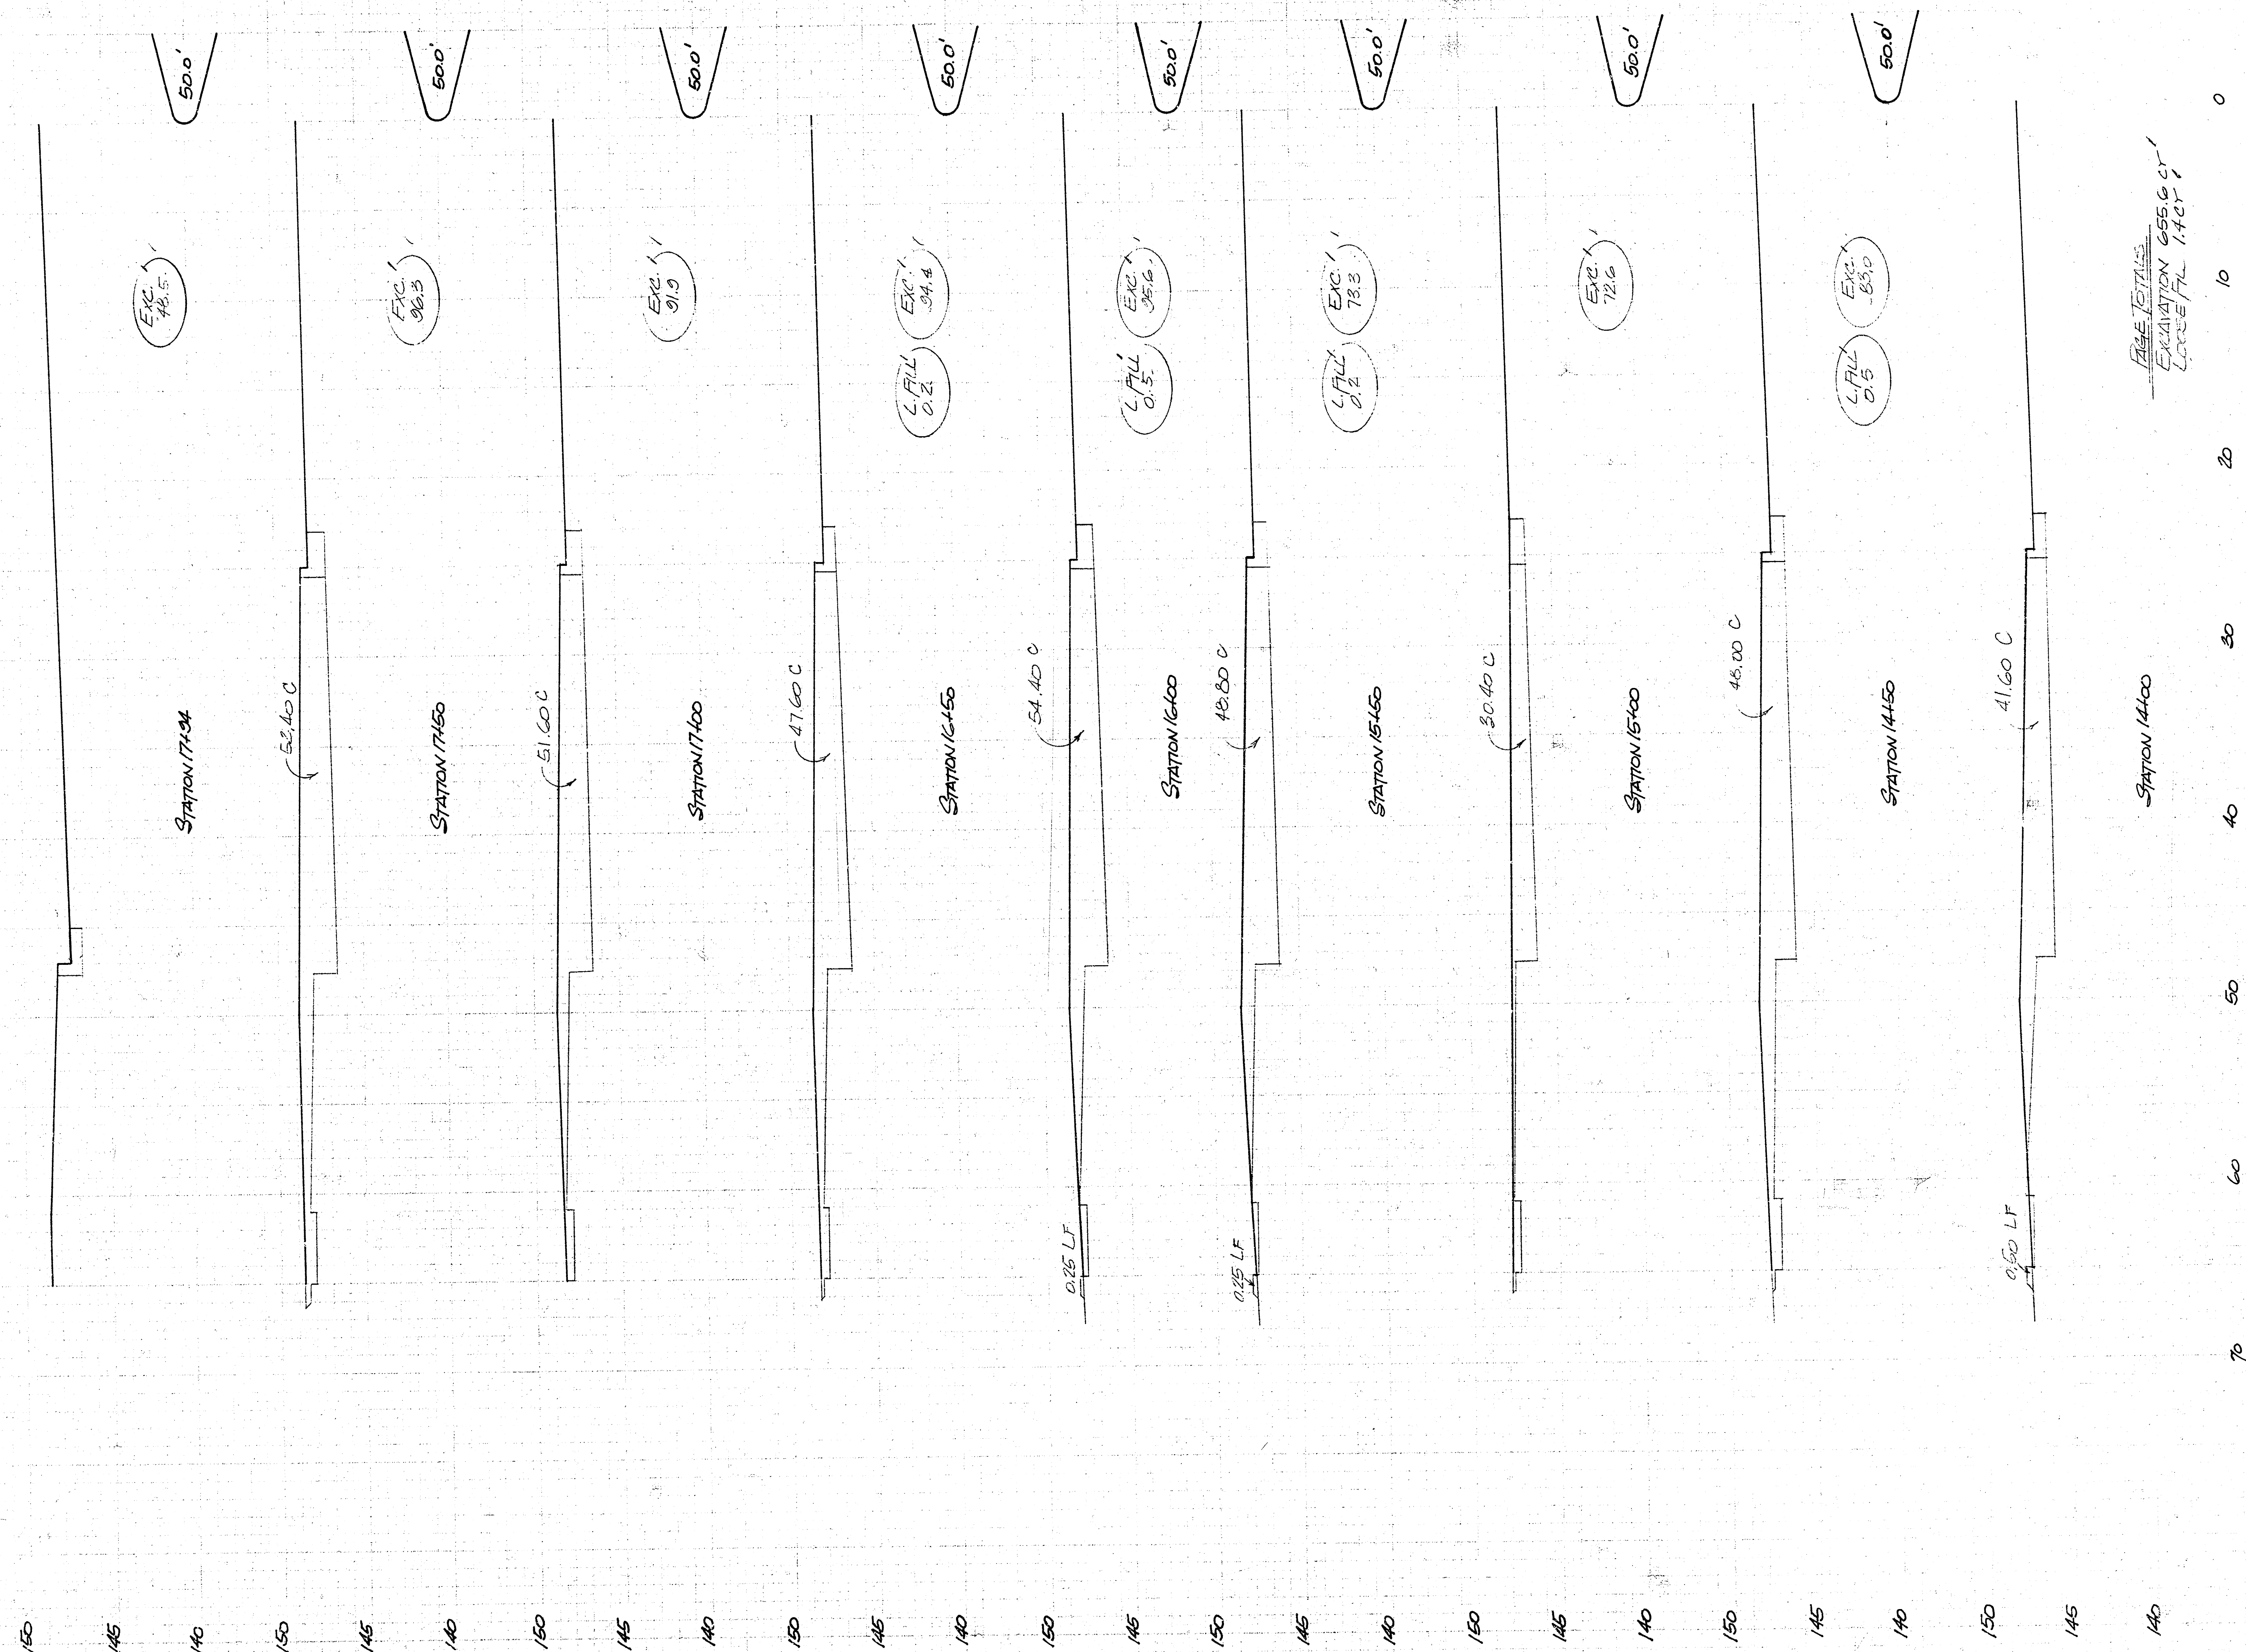

PAGE TOTALS
EXAMINATION 655.6 cr
LABOR 1.4 cr



STATION 14+00

CENTRAL AVENUE
ACCEL/DECEL LANE

FILMED FROM THE BEST
AVAILABLE COPY

Bench Mark: City of Wichita Dec. 26.2 North
 2.35' West of E. Central & Third
 Elevation: 142.00 City Datum
 Bench Mark: 11. Set on back of sidewalk opp
 1075 Southwest corner lot 4
 Third Avenue City Addition.
 Elevation 142.06 City Datum

TYLER ACRES FIFTH ADDITION

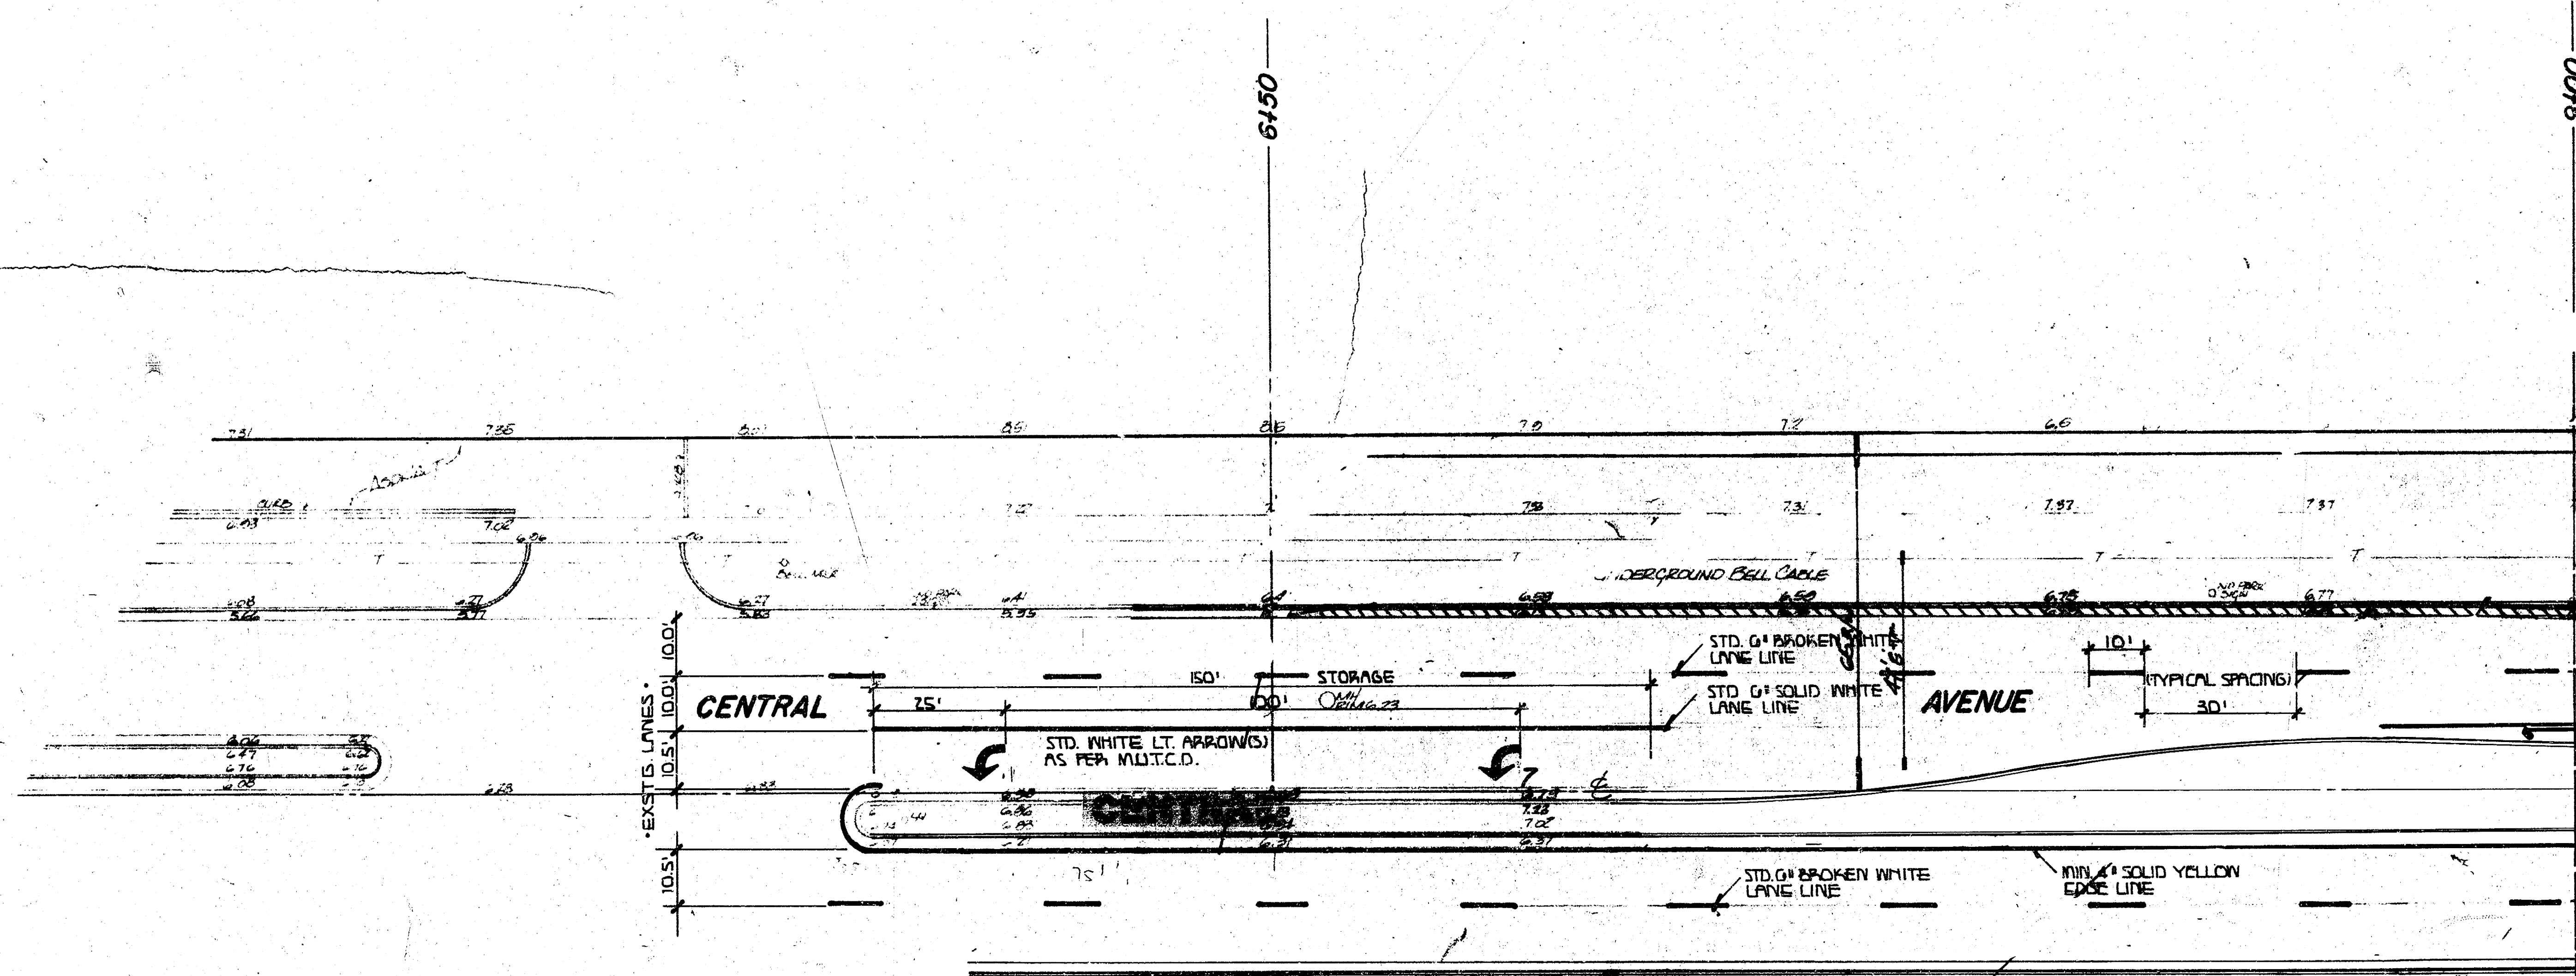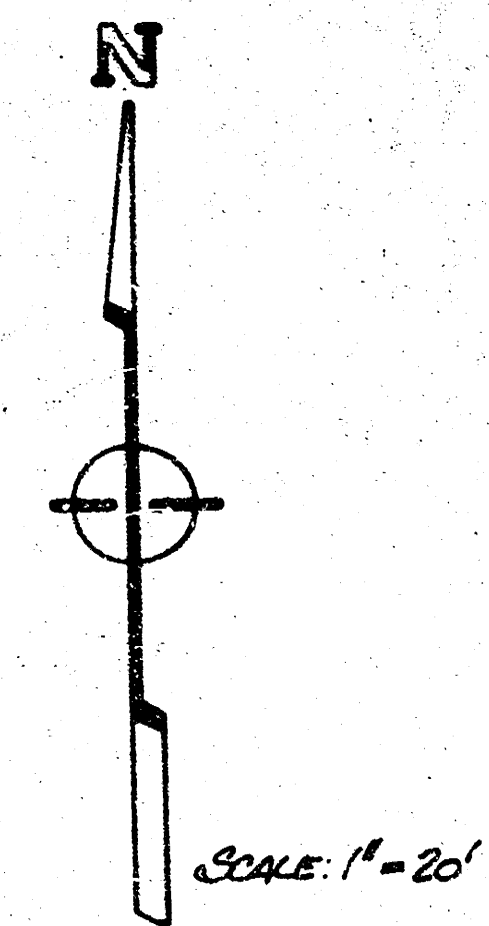

• ESTIMATED QUANTITIES •

- (Contractor information only.)
1. 4" (yellow) = 5,000.0 L.F.
 2. 6" (white) = 1,510.0 L.F.
 3. 12" (white) = 150.0 L.F.
 4. 12" (yellow) = 240.0 L.F.
 5. 24" (white) = 60.0 L.F.
 6. Std. Arrow (Lt.) = 15 Ea.
 7. Primer = 15 gal.
(use w/ cold plas. markings.)


NOTE:

1. Contractor to install Permanent Cold Plastic Pavement Markings in compliance with std. specifications for installation as per City of Wichita, Traffic Engineering Div. All pavement markings shall conform to the current standards set forth in the Manual on Uniform Traffic Control Devices and for other applicable current publications on this project.
2. All pavement markings are to be installed and cold rolled except where new a.c. pavement is being constructed; in which case, the pavement markings shall be installed on the new wearing surface and hot rolled so as to interlock pavement markings in the new pavement.


PAVEMENT MARKINGS
CENTRAL AVENUE - D-1
 7/16

BENCH MARK: CITY OF NICHTA DIS, S. 2' NORTH
S. 33' WEST OF E. CENTRAL & TYLER
ELEVATION: 143.20 CITY DATUM


BENCH MARK: 1" CUT ON BACK OF SIGNAGE OFF
CENTRAL STREET CORNER LOT 4
TYLER ACRES 5TH ADDITION
ELEVATION: 143.06 CITY DATUM

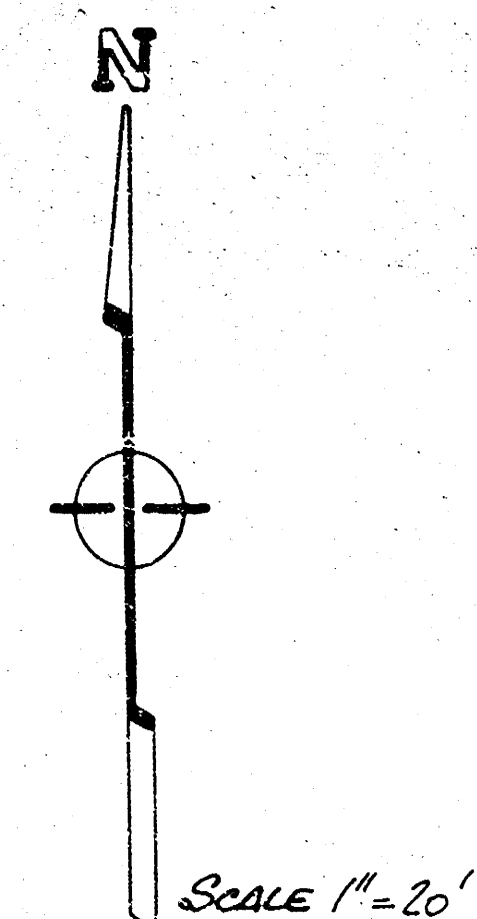

TYLER ACRES FIFTH ADDITION

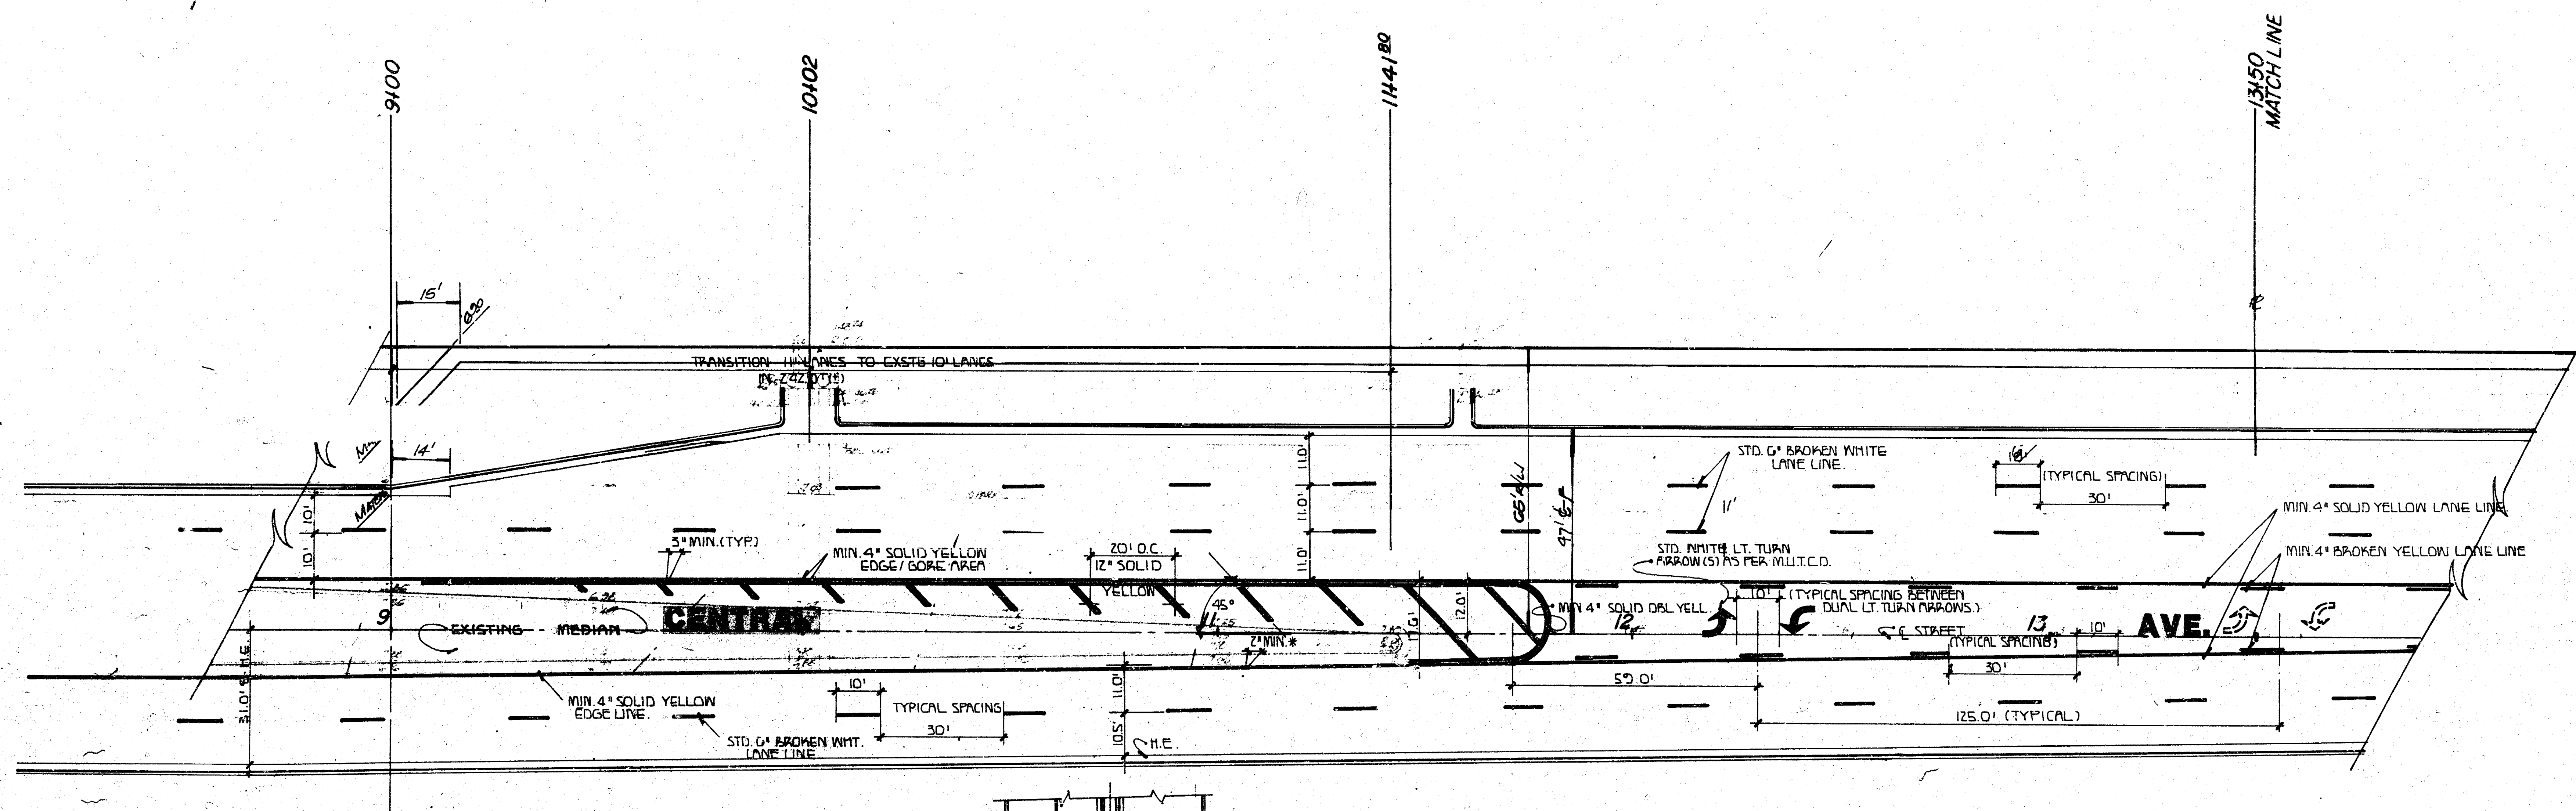

detail-1a

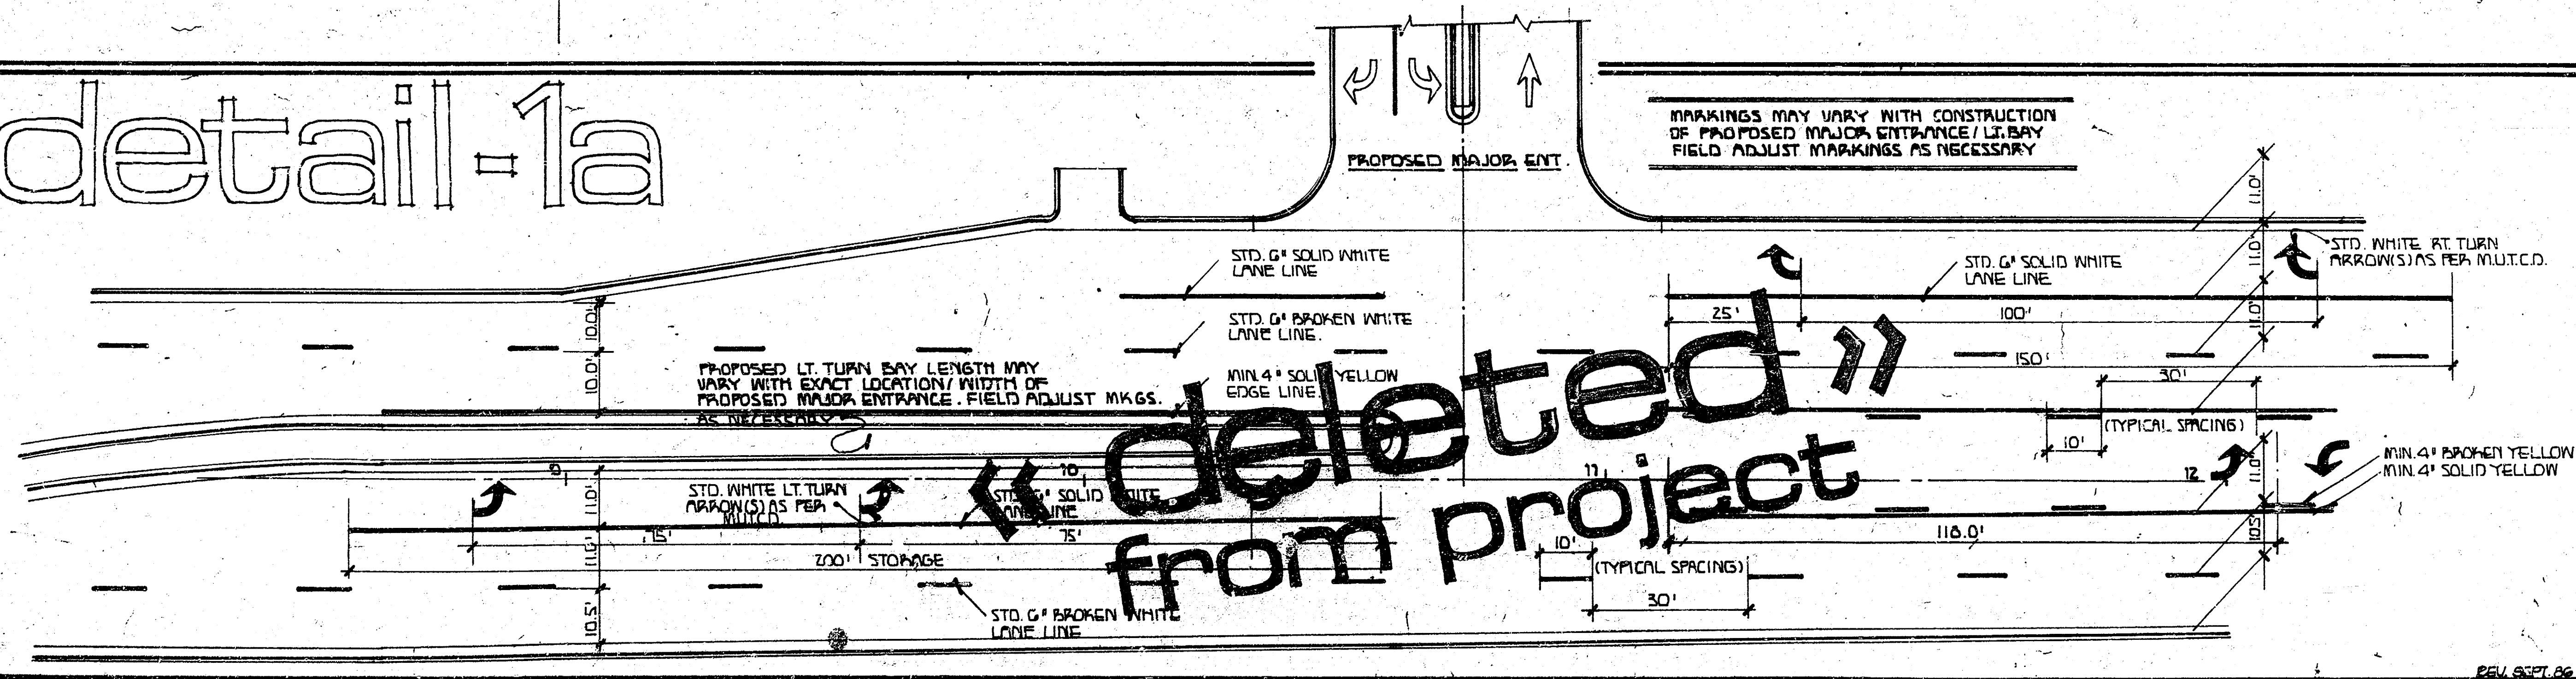

PAVEMENT MARKINGS
CENTRAL AVE. ACCEL-DECEL

PRO. # 472-76-245-81561-000-000-001


3/11

FILMED FROM THE BEST
AVAILABLE COPY

BENCH MARK: CITY OF LITCHFIELD, EG. 2' NORTH
C. 30' WEST OF E. CORNER E. TRUCE
ELEVATION: 113.50 CITY DATUM

BENCH MARK: 1" CUT ON BACK OF BENCH MARK OFF-
CUTS CORNER LOT 4
TRUCE ACROSS ERM ACCESSION.
ELEVATION 113.06 CITY DATUM


TYLER ACRES FIFTH ADDITION

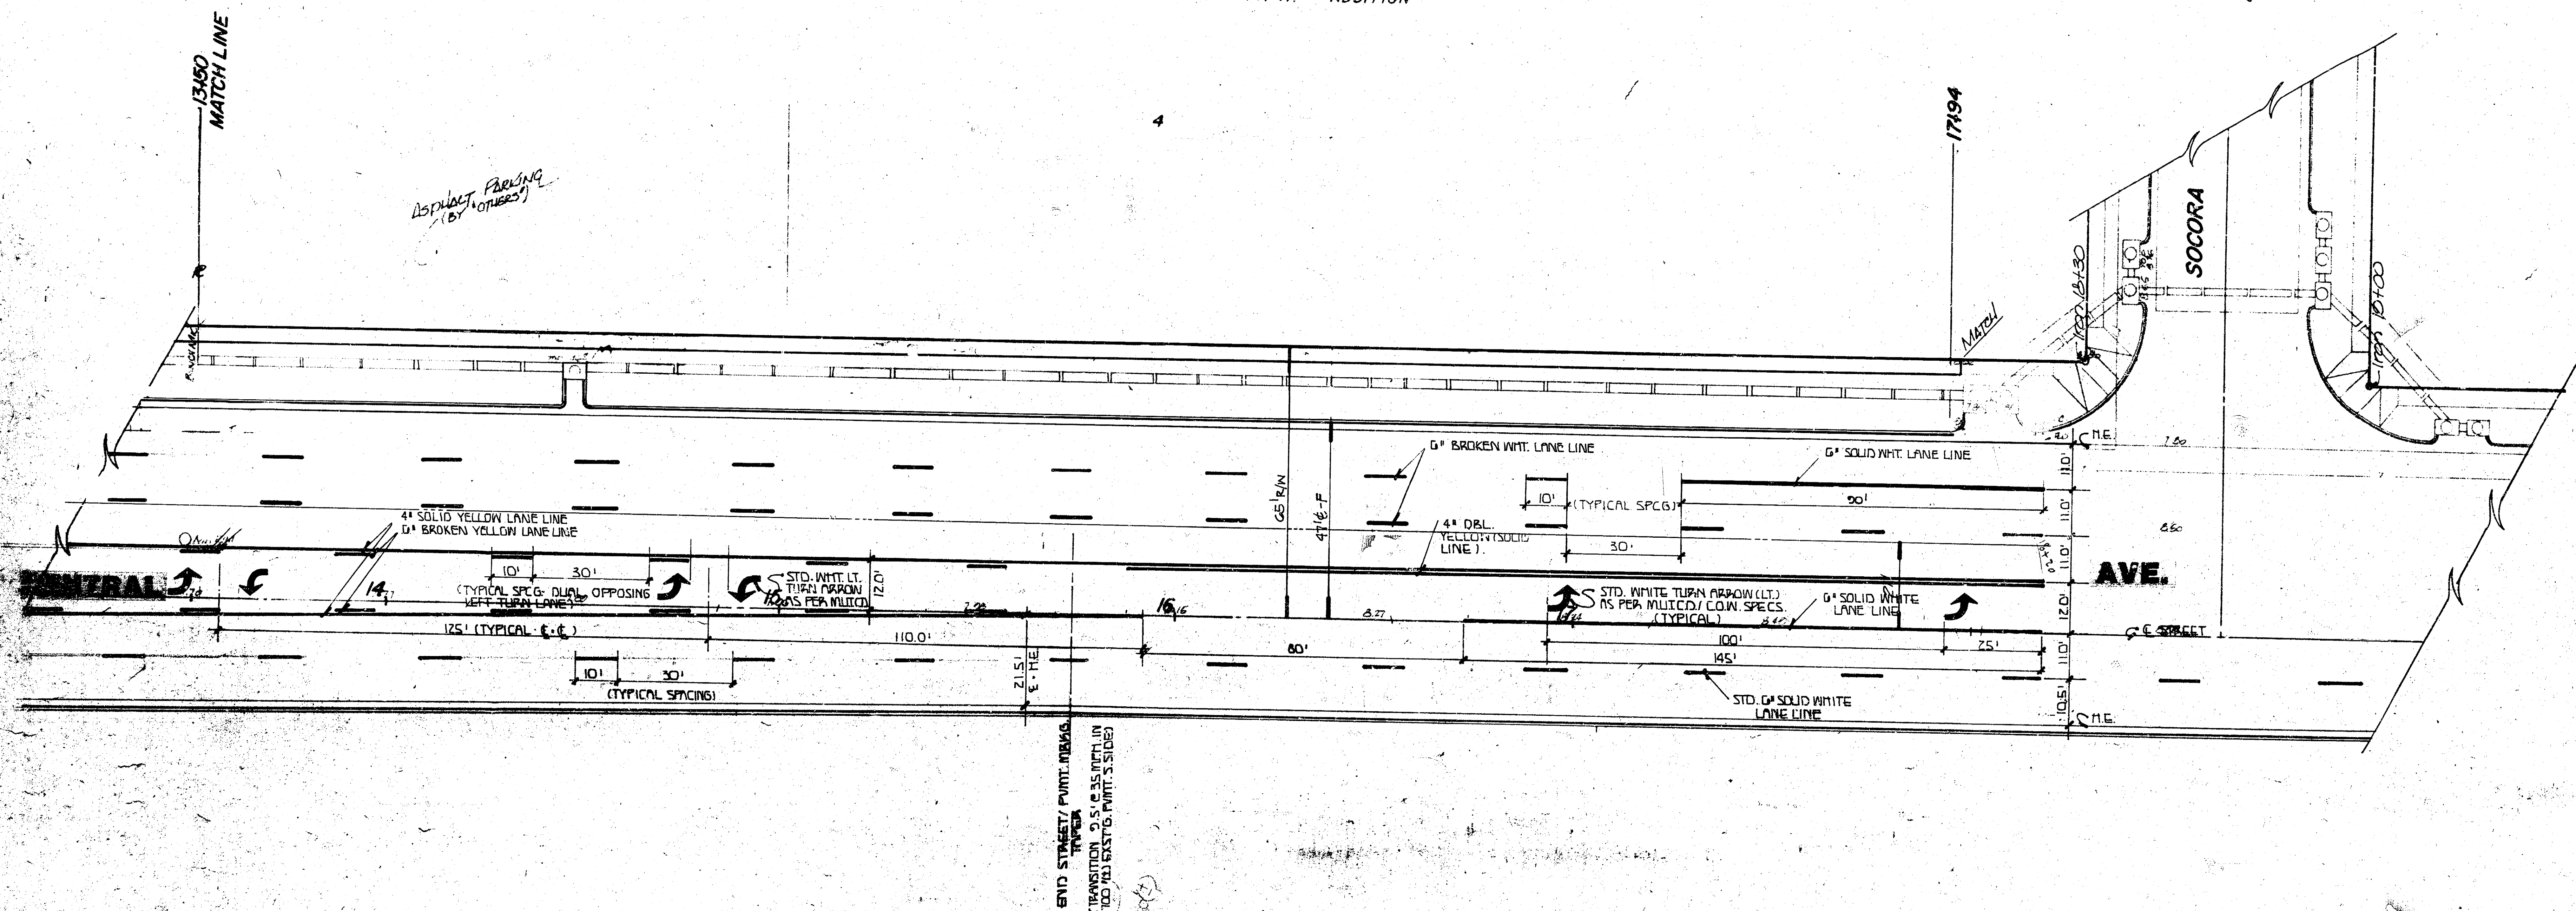

PAVEMENT MARKINGS
CENTRAL AVE. ACCEL-DECEL

PRO.# 472-76-245-81561-000-000-001

FILMED FROM THE BEST
AVAILABLE COPY

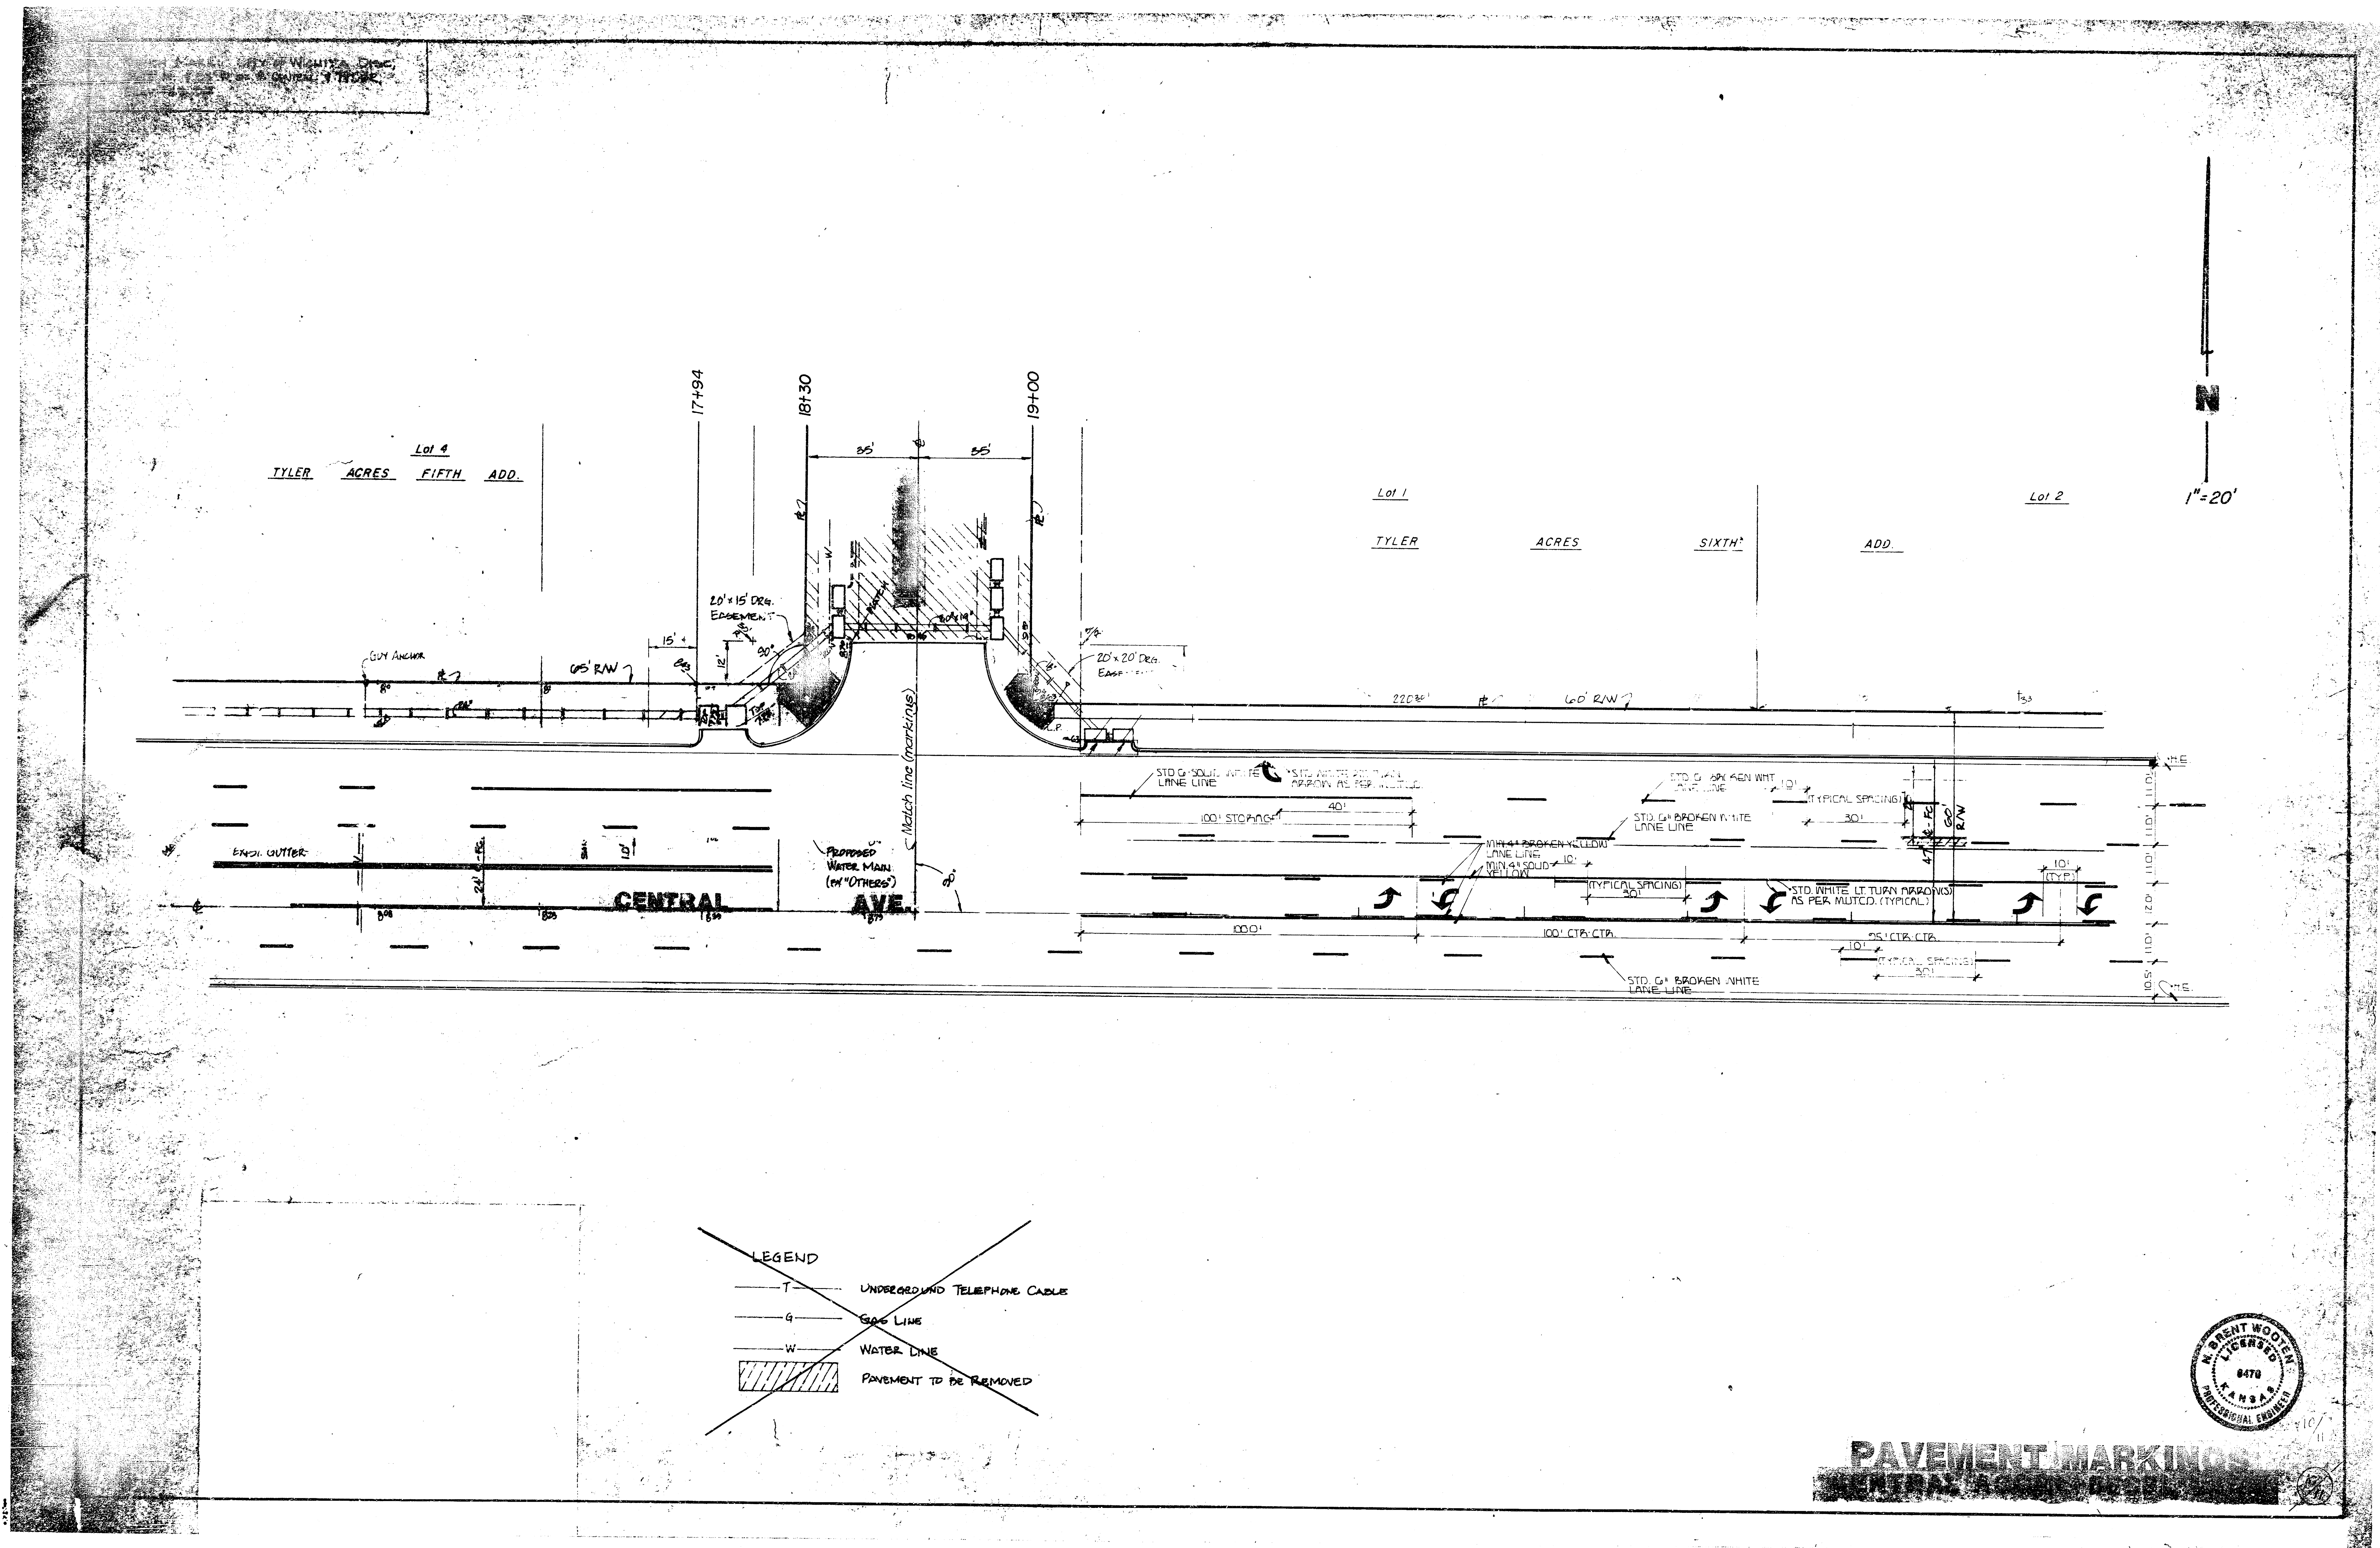

FILMED FROM THE BEST
AVAILABLE COPY

