NOTE TO CONTRACTOR

This project will be constructed under the supervision of the CITY ENGINEER and conformed to the SPECIFICATIONS of the CITY OF WICHITA. The CONTRACTOR will reimburse the City of Wichita for all cost of Engineering, Plans, and Inspection.

1" = 10'

Base Line = ℄ 20' Alley

B.M. 108.31 R.R. S.S. R.Pole at ℄ 143.1 in Alley = 19' N. of S.L. Lewis St.

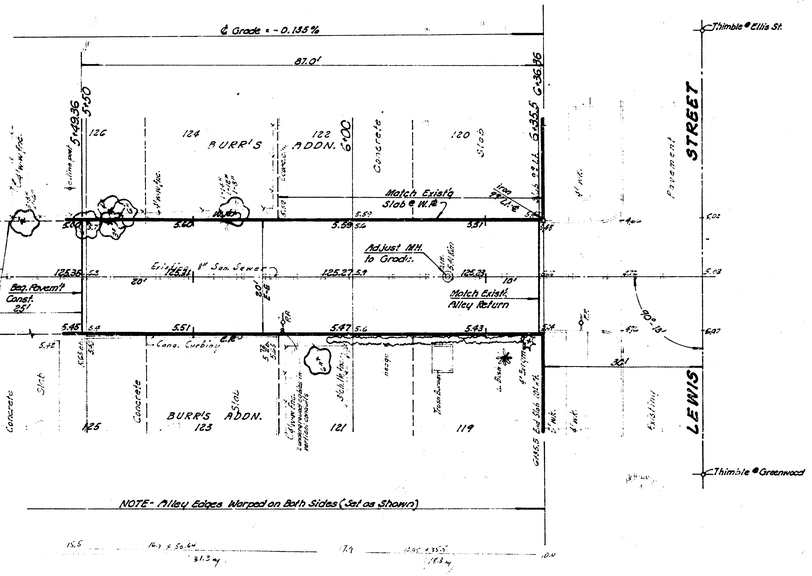

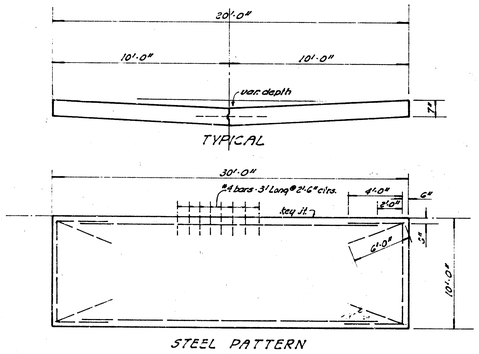

BILL OF MATERIALS		
Quantity	Unit	Item
193.3	S.Y.	7" Conc. Pavement
1010	Lbs.	Reinf. Steel
49.6	C.Y.	Excavation
2.42	Tons	Cement or Lime
193.3	S.Y.	Subgrade Manipulation
87	L.F.	Key Joint
2	Ea.	Small Trees Rem.
4.6	Tons	Sand or Gravel
1	Ea.	Adjust M.H.

ALLEY BET. GREENWOOD & ELLIS

87' So. of S.L. Lewis Street To S.L. Lewis Street

20' Concrete Pavement

City of Wichita, Kansas

R.W. Linn City Engineer

Date: Oct. 1971 PRIVATE CONTRACT