


B.M. 97.605 U. S. G. S. Standard SW 31st. & Meridian.
Base line = EL. Edwards Ave.

SCALE 1"=20'

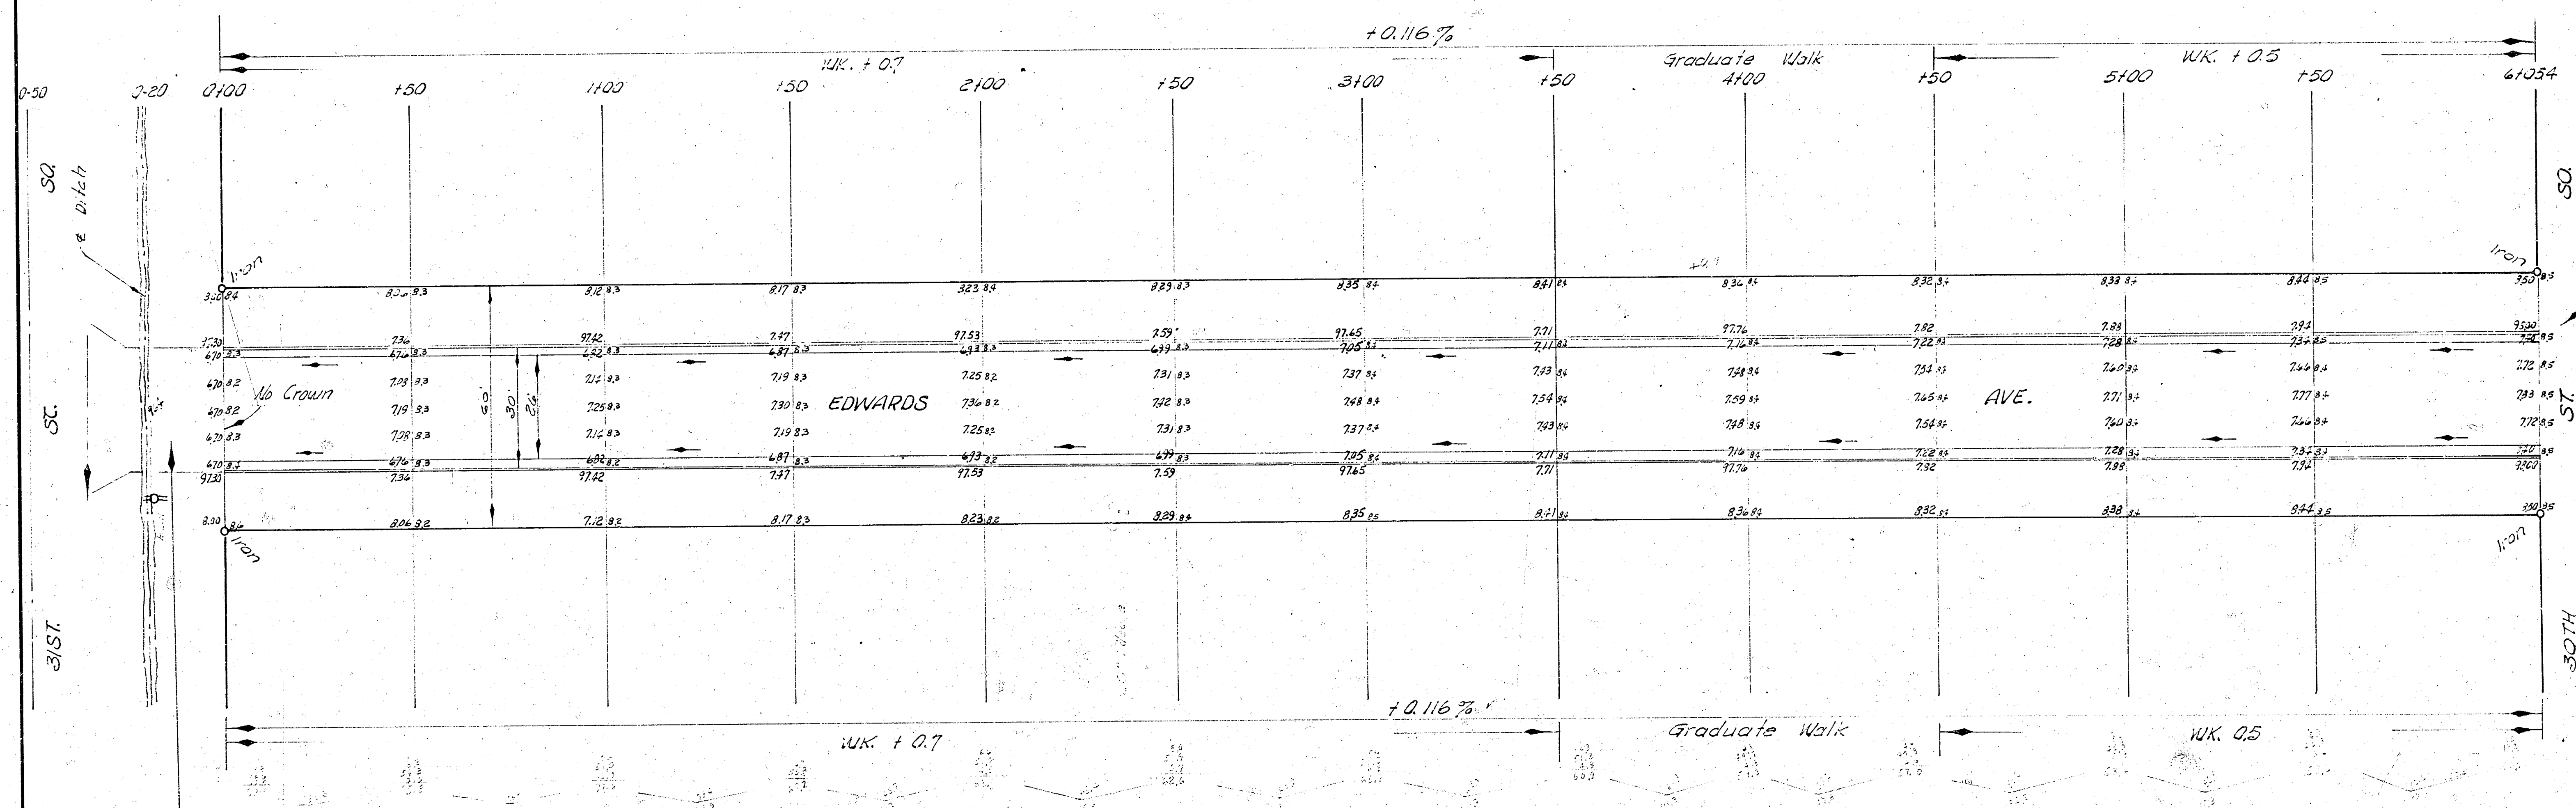


NOTE:

Contractor to construct dirt and
Sand hook-up.
City to install Pipe in ditch.

EARTH WORK
Excavation
1429 Cu. Yds.

ESTIMATE OF QUANTITIES (DRIVES NOT INCLUDED)			
QUANTITY	UNIT	ITEM	FINAL
1,749	Sq. Yds.	Asphalt Conc.	
12 H.	Lin. Ft.	Came ab & qtr.	
4379	Lbs.	Reinf. Steel	
1429	Cu. Yds.	Excavation	

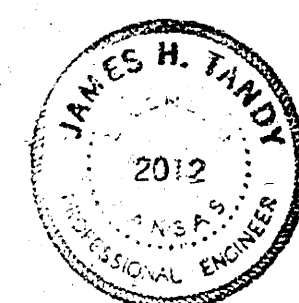

EDWARDS AVE.
NL. 31ST. ST. SO. TO SL 30TH ST. SO.
26-2-30 A.C.
CITY OF WICHITA, KANSAS
B. E. SMITH CITY ENGINEER
PRIVATE CONTRACT