


BASELINE = E EDWARDS AVE.

B.M. 44.62 60" SPK. W-FACE STREET LIGHT POLE S.E. COR. WILDWOOD & EDWARDS
B.M. 44.85 7" TOP CB S-RET. S.E. COR. SUNNYBROOK & ST. PAUL

SCALE 1" = 20'

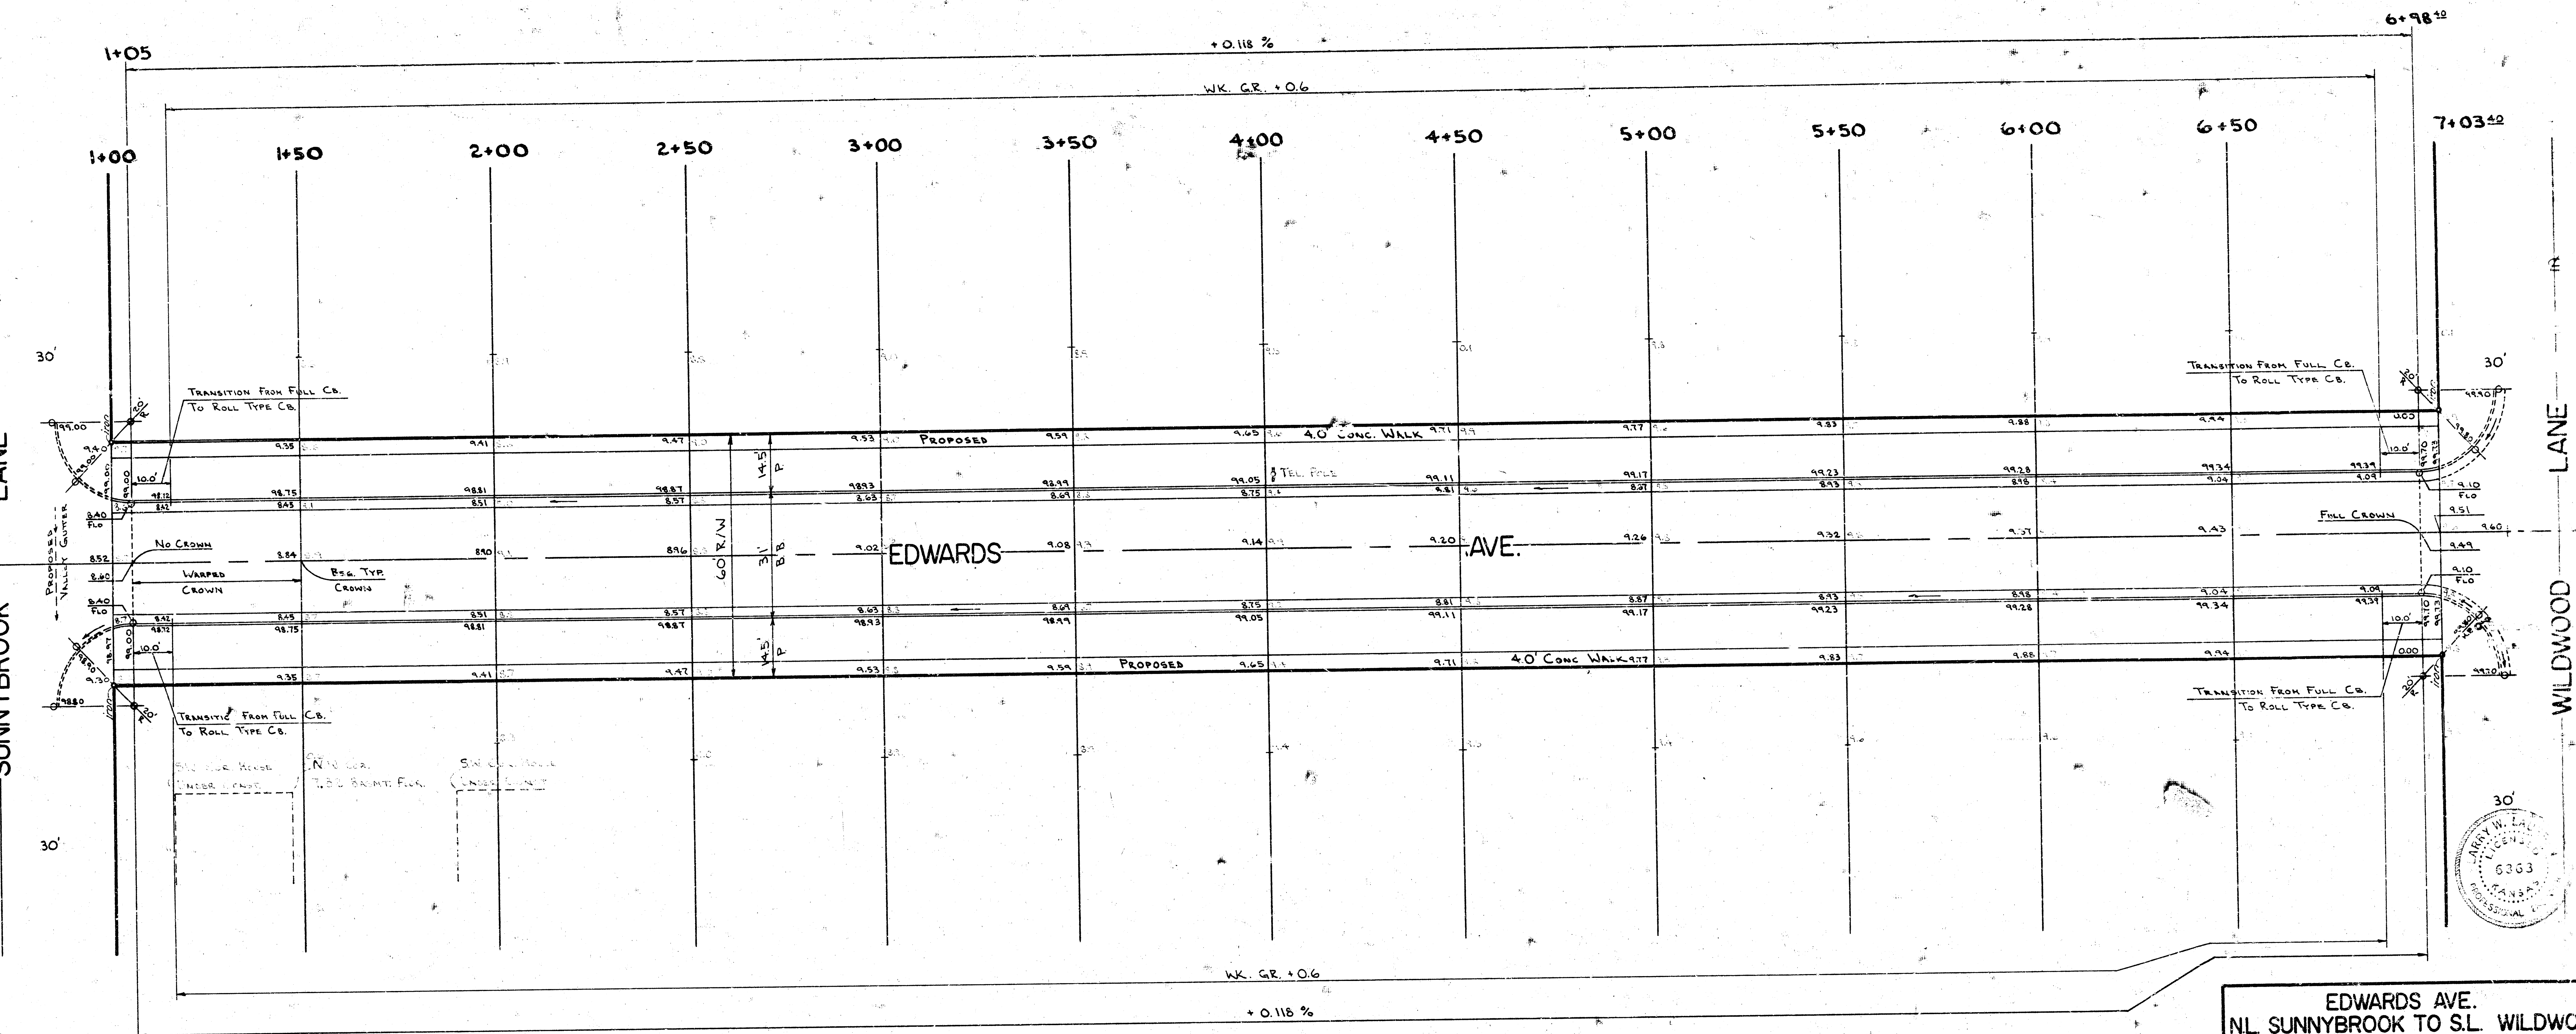

NOTE: CONTRACTOR TO CLEAR RIGHT-OF-WAY, GRADE PARKINGS, AND CONSTRUCT COMPACTED FILL WHERE NECESSARY FOR PROPOSED SIDEWALK. SIDEWALK TO BE CONSTRUCTED BY OTHERS. FIELD ENGINEER IS TO DETERMINE THE TYPE OF SUB-GRADE TREATMENT WHICH IS TO BE USED. SUBGRADE TREATMENT MAY CONSIST OF LIME TREATED SUBGRADE, CEMENT TREATED SUBGRADE, RE-COMPACTION OF EXISTING SUBGRADE MATERIAL AS SPECIFIED IN STANDARD SPECIFICATIONS, OR ANY COMBINATION OF THESE. CONTRACTOR TO GRADE WILDWOOD ON THE NORTH END OF EDWARDS TO MATCH NEW PAVEMENT AS DETERMINED BY ENGINEER.

~ EARTHWORK ~			
EXCAVATION	53.9 Cu.Yds.	COMPACTED FILL	4.2 Cu.Yds.
+10%	53.9 Cu.Yds.	+10%	4.9 Cu.Yds.
TOTAL	59.1 Cu.Yds.	TOTAL	5.1 Cu.Yds.

NOTE: GRADING OF WILDWOOD INTERSECTION WILL NOT BE PAID FOR DIRECTLY, BUT SHALL BE CONSIDERED AS SUBSIDIARY TO THE OTHER ITEMS OF WORK.

EDWARDS AVE.
N.L. SUNNYBROOK TO S.L. WILDWOOD
BUILDERS 14th ADDITION
ASPHALTIC CONCRETE PAVEMENT
3' B-B WITH COMB. CB. & GTR.

CITY OF WICHITA, KANSAS
R. W. LINN CITY ENGINEER
PROJ. NO. DAKS 573098
DATE: JAN. 1974

