


ELIZABETH AVE.

N.L. LOT 4, BLK. E TO N.L. BLK. A & E, VILM GARDENS 2ND ADDN.
472 76 245 80520 000 000 001

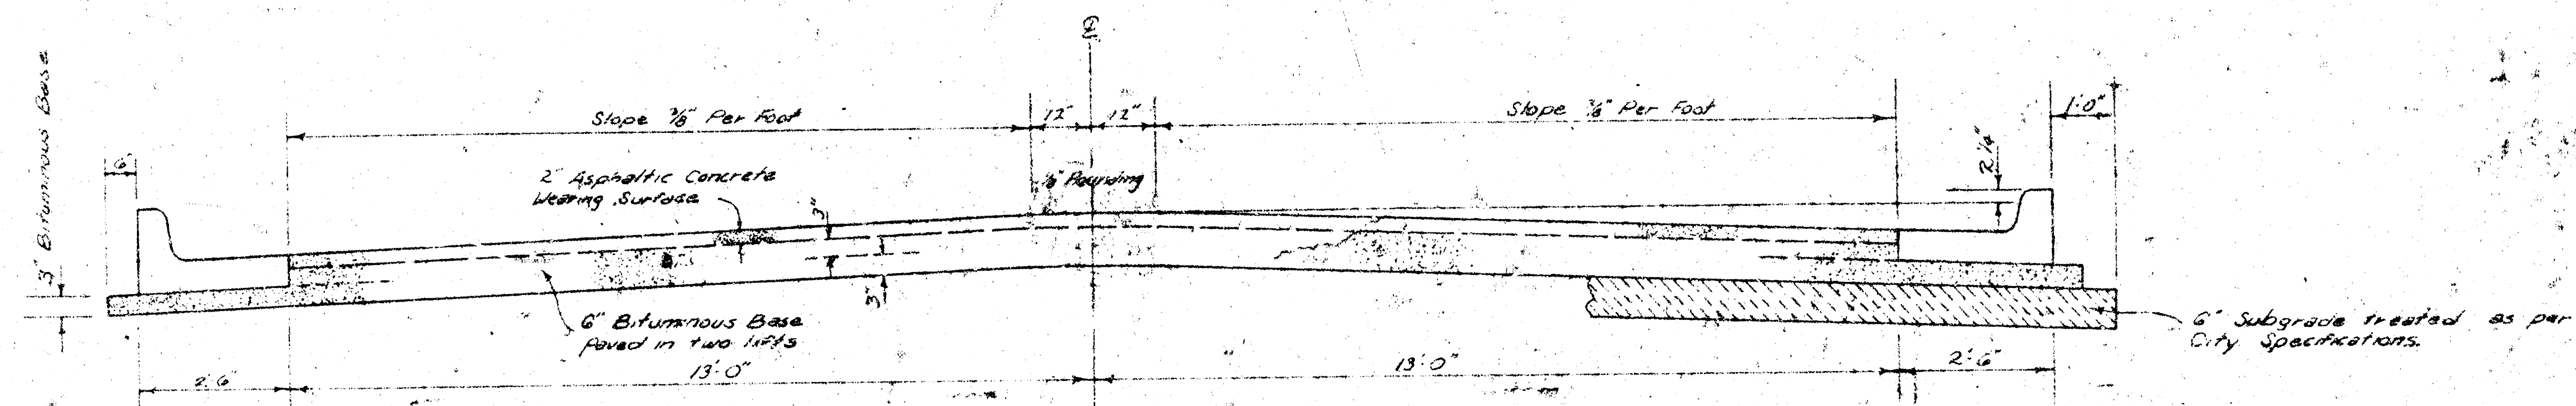


TYPICAL SECTION

3' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQ. YD. BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT. BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE PAVEMENT CENTERLINE IN THE TOP LIFT.


DETAIL OF TRANSVERSE CONSTRUCTION JOINTS

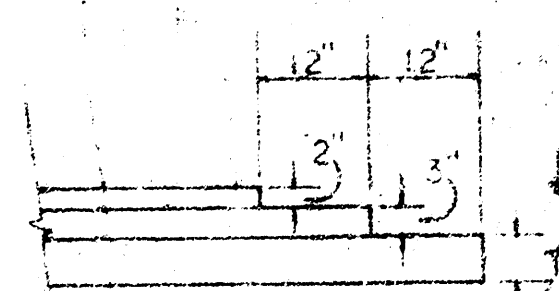



TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

The A.C. pavement between the Comb. Curb & gutter shall be paid as Sq. Yds. 6" A.C. Pavement (a Bituminous Base). The Bituminous Base under the Comb. Curb & gutter shall be paid as Sq. Yds. 3" Bituminous Base.

COMBINED CURB & GUTTER

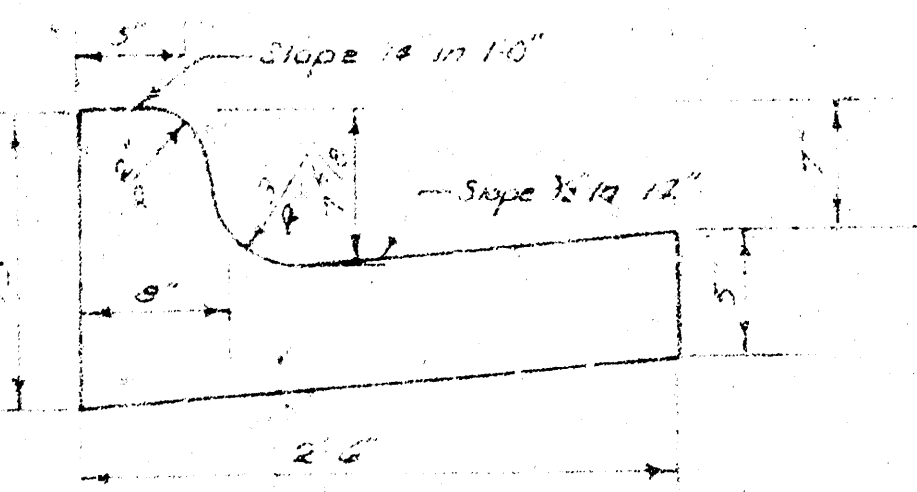

ROLL TYPE CURB & GUTTER

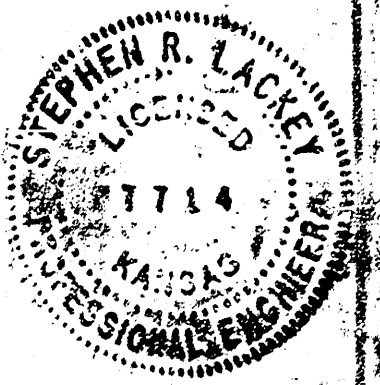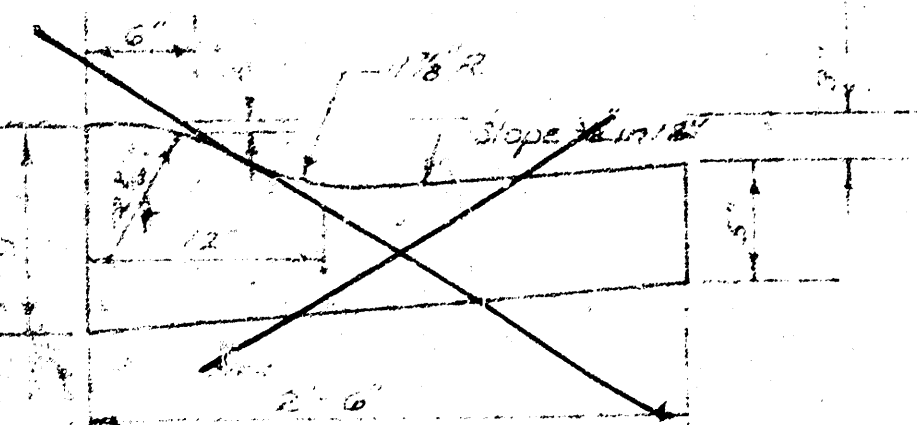

CITY OF WICHITA, KANSAS


DEPARTMENT OF PUBLIC WORKS — ENGINEERING

DEAN SELLERS Acting CITY ENGINEER


DATE: _____ PROJ. NO. DAKS 577035

Baseline is E. Elizabeth Ave.

No More Than 1-20' Drive Or The Equivalent To Be Constructed.

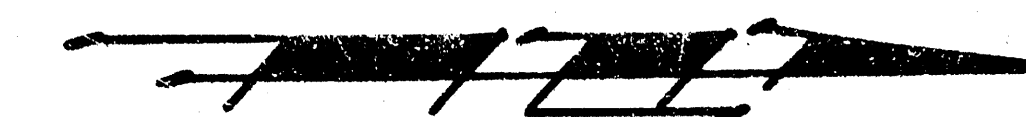

Scale :
1" = 20'

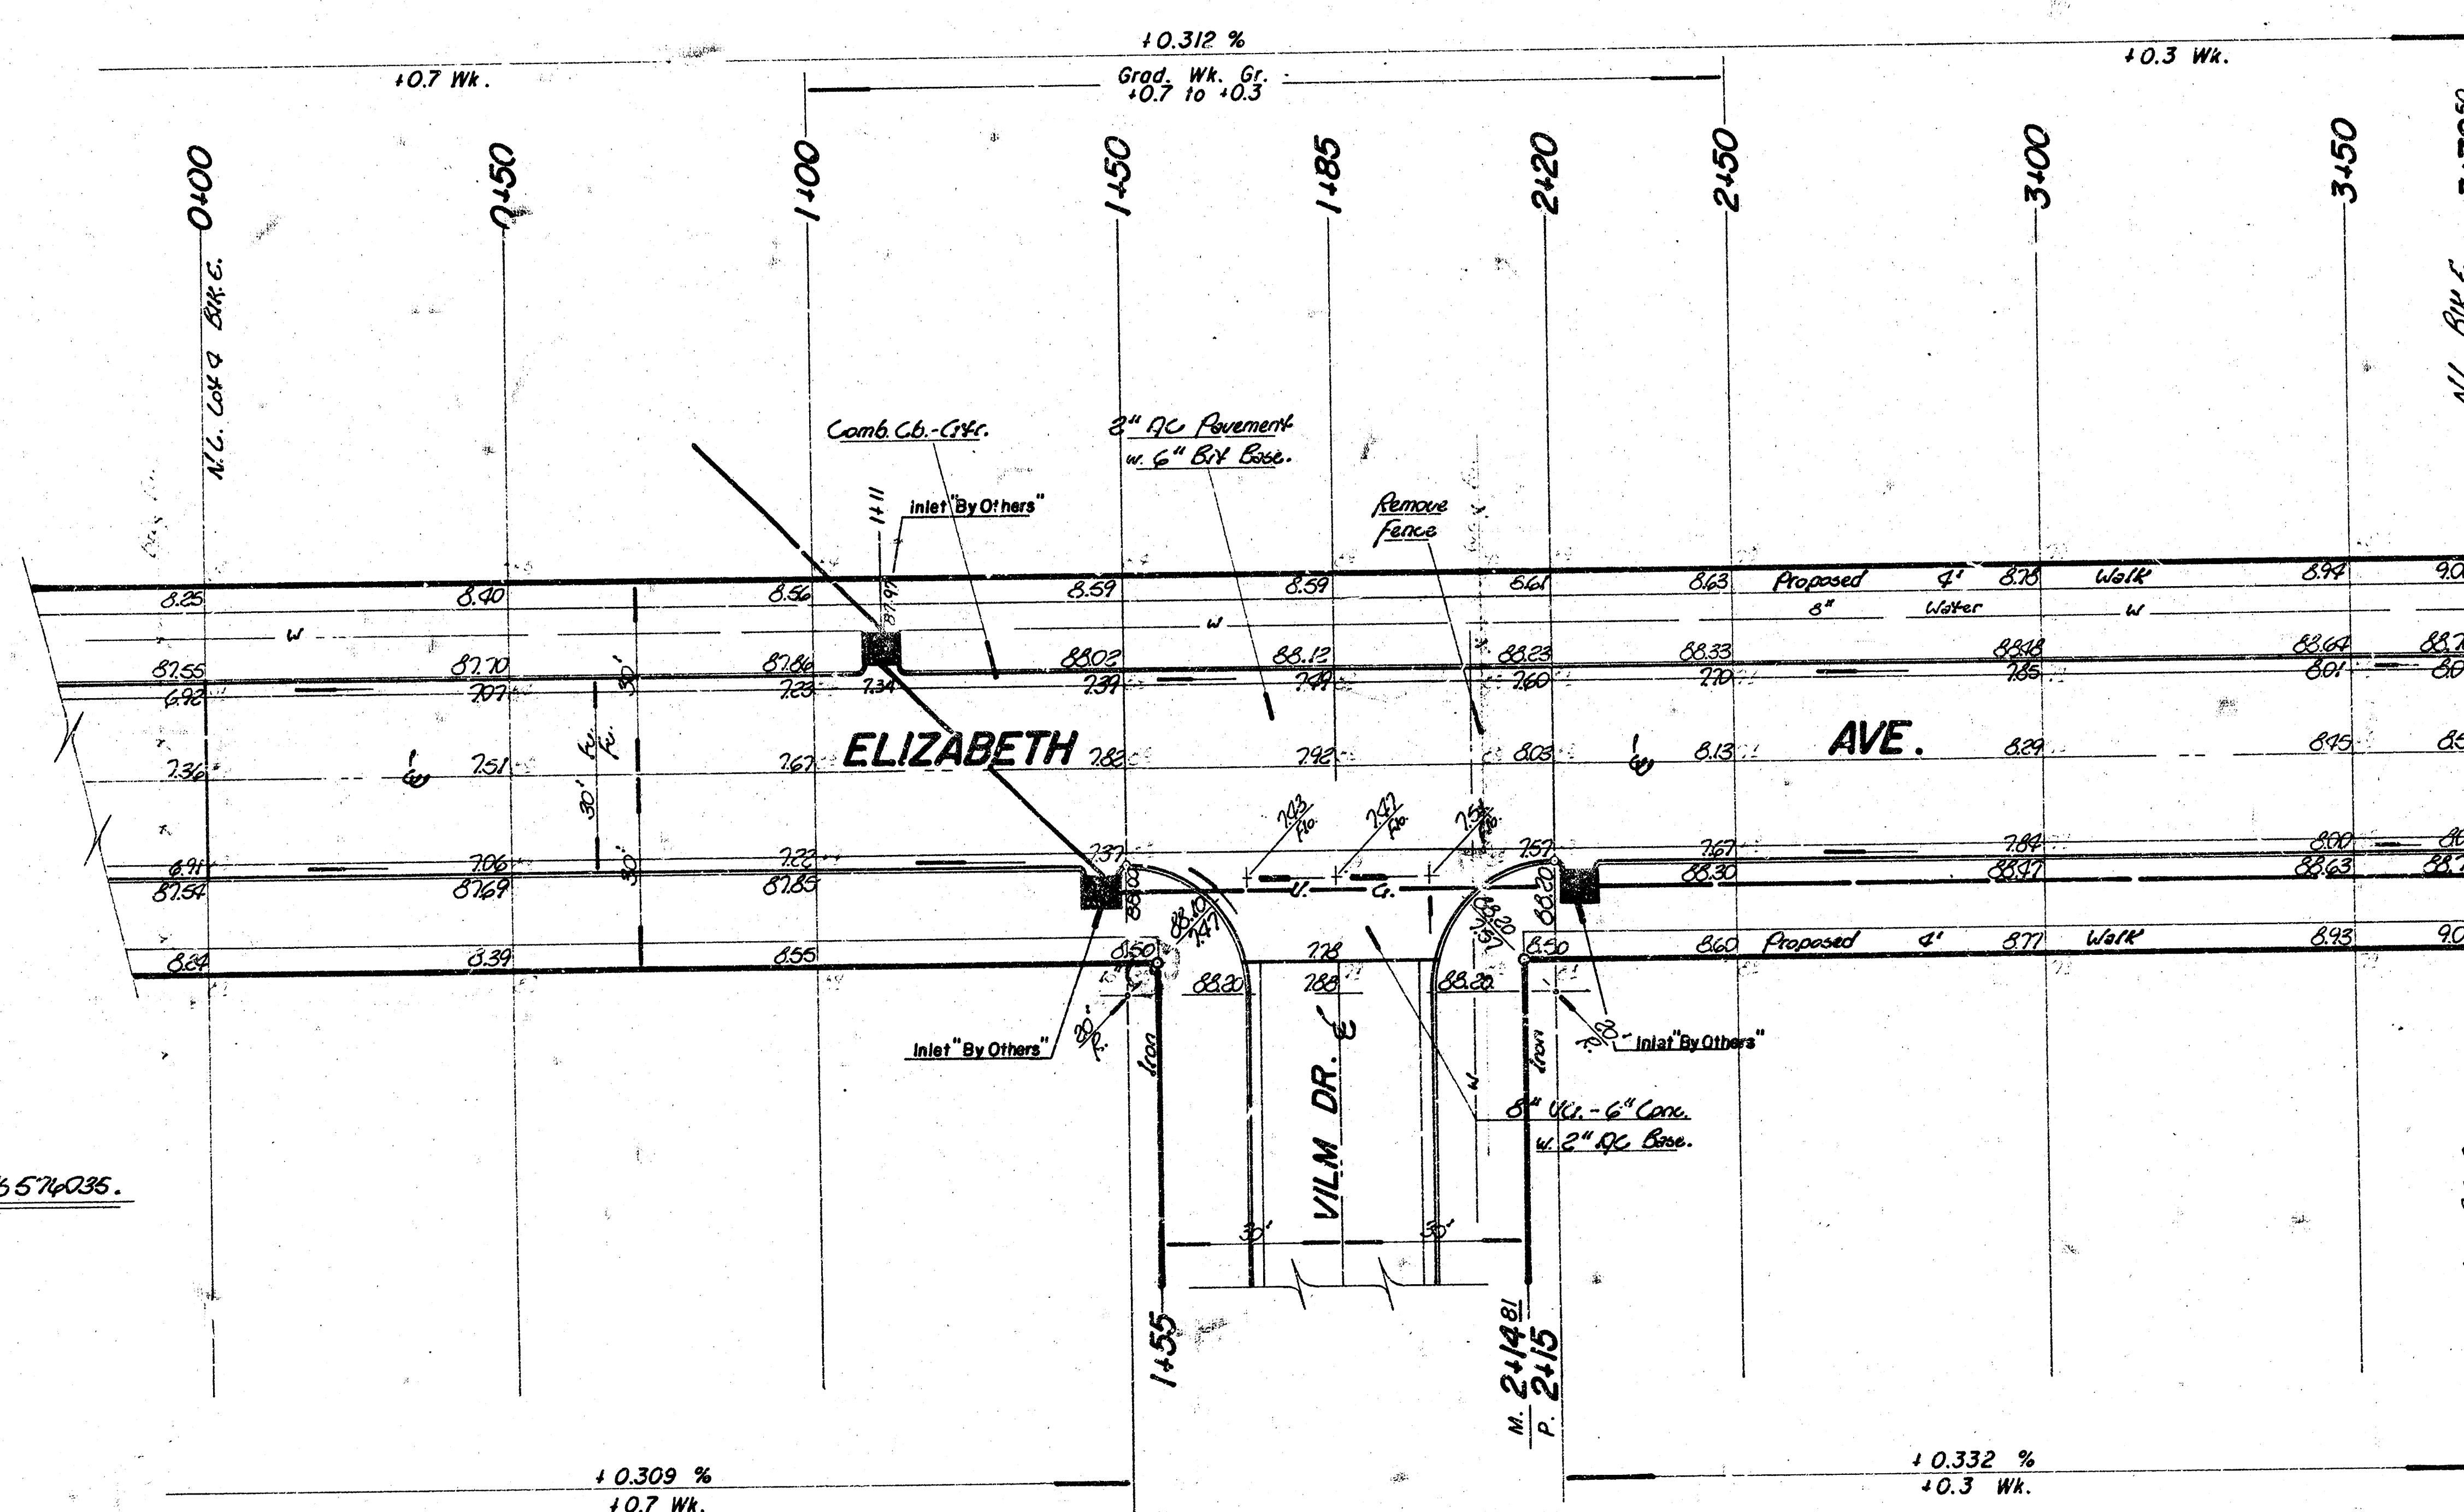

Note:

Contractor to take ties & replace any "loose" either moved or destroyed during construction.

~~x~~ ~~x~~ Indicates Fence Removal.

5% D+00 on this Project
= 5% 5+53.50 on Project No. DRK'S 574035.

Note: Excess Earthwork Material from Construction of Project No. 577035 is to be used for Construction of Project No. 577036.

Earthwork Quantities

Property	City
Excavation = 611.8 cy. Comp. fill = 21.3 cy $\div 10\% = 61.2 \text{ cy.}$ $\div 10\% = 2.1 \text{ cy.}$ Total = 673.0 cy Total = 23.4 cy Manipulation = 1248.5 cy.	Excavation = 74.8 cy Comp. fill = 0 $\div 10\% = 7.5 \text{ cy.}$ $\div 10\% = 2.5 \text{ cy.}$ Total = 82.3 cy Manipulation = 175.8 cy.

ELIZABETH AVE.

N. L. Lot 4, Blk. E to N. L. Blk. A & E, Wilm. G. 2.
31' BB - 2" AC Pavmt. w 6" Bit. Bs. - Comb. Cb-G.

CITY OF WICHITA, KS.

Dean Sellers
Project No.

Acting City Engineer
DAKS 577035,

Project No. 472 76 245 80520 000 000 001
Date : (2/3)

FILMED FROM THE BEST