

CENTURY II & EXHIBITION HALL PARKING LOT


PROJ. NO. 472-76-245 - 81595 - 000-000-001

BETWEEN LEWIS STREET AND WATERMAN STREET.
EAST OF WICHITA STREET.

NOTE: CONSTRUCTION SITE CONTAINS MISCELLANEOUS RUBBLE, FOOTINGS AND WALLS THE EXACT EXTENT OF WHICH IS NOT FULLY KNOWN. CONTRACTOR WILL BE REQUIRED TO REMOVE SUCH RUBBLE, FOOTINGS AND WALLS TO AN ELEVATION OF SIX (6) INCHES BELOW THE BOTTOM OF THE PAVEMENT AND PLACE SIX (6) INCHES OF SUITABLE EXCAVATED MATERIAL FOR TREATMENT AS SUBGRADE FOR THE PROPOSED PAVEMENT. REMOVAL OF SUCH RUBBLE, FOOTINGS AND WALLS AND PLACEMENT OF SIX (6) INCHES OF EXCAVATED MATERIAL IN SUCH AREAS WILL NOT BE PAID FOR DIRECTLY AND THIS WORK SHALL BE CONSIDERED AS SUBSIDIARY TO THE OTHER PAY ITEMS OF WORK INCLUDED IN THE CONTRACT. PROSPECTIVE BIDDERS MUST EXAMINE THE PROPOSED CONSTRUCTION SITE TO ASCERTAIN THE EXACT AMOUNT OF WORK INVOLVED IN THESE ITEMS.

NOTE: PARKING LOT LIGHTING SYSTEM, TRAFFIC MARKINGS DELINEATING SPACES AND ATTENDANT 11" HONEY BOXES TO BE PROVIDED AND INSTALLED BY OTHERS. UNDERGROUND CONDUIT FOR LIGHTING SYSTEM MUST BE INSTALLED BY OTHERS PRIOR TO TREATING OF SUBGRADE FOR PARKING LOT PAVEMENT.

A saw cut of at least one-half the depth of existing surface courses or one-fourth the depth of the existing total pavement thickness shall be provided at locations where proposed construction abuts an existing surface course or pavement for which partial removal of that surface or pavement is required. Sawn joint to facilitate removal within three (3) feet of existing joints will not be permitted and for such instances the limits of removal shall extend to the existing joint. Such saw cuts will not be paid for directly and this cost shall be considered as subsidiary to the removal of the surface or pavement.

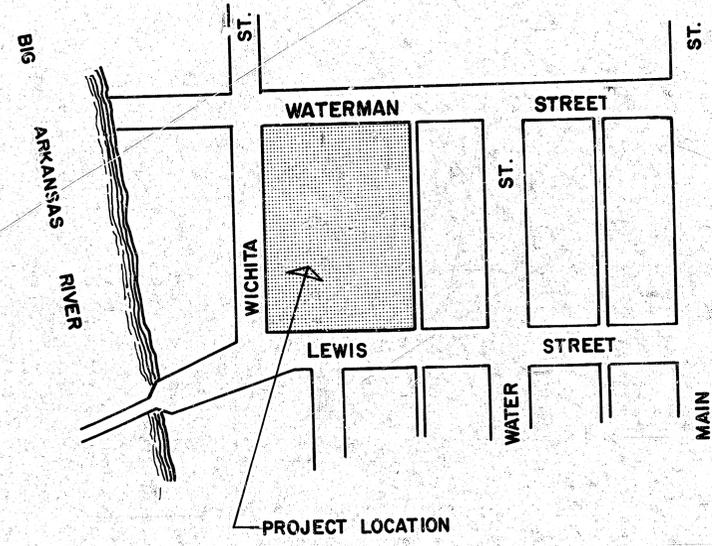


M. E. LINDEBAK CITY ENGINEER
CITY OF WICHITA, KANSAS





BENCH MARKS
112.66 CITY OF WICHITA DISC, SIDEWALK NORTHEAST COR. BRIDGE, ARKANSAS RIVER & LEWIS.
111.85 N.W. COR. BOTTOM CONC. STEP, W. SIDE DOOR TO BLDG. 335 W. LEWIS.

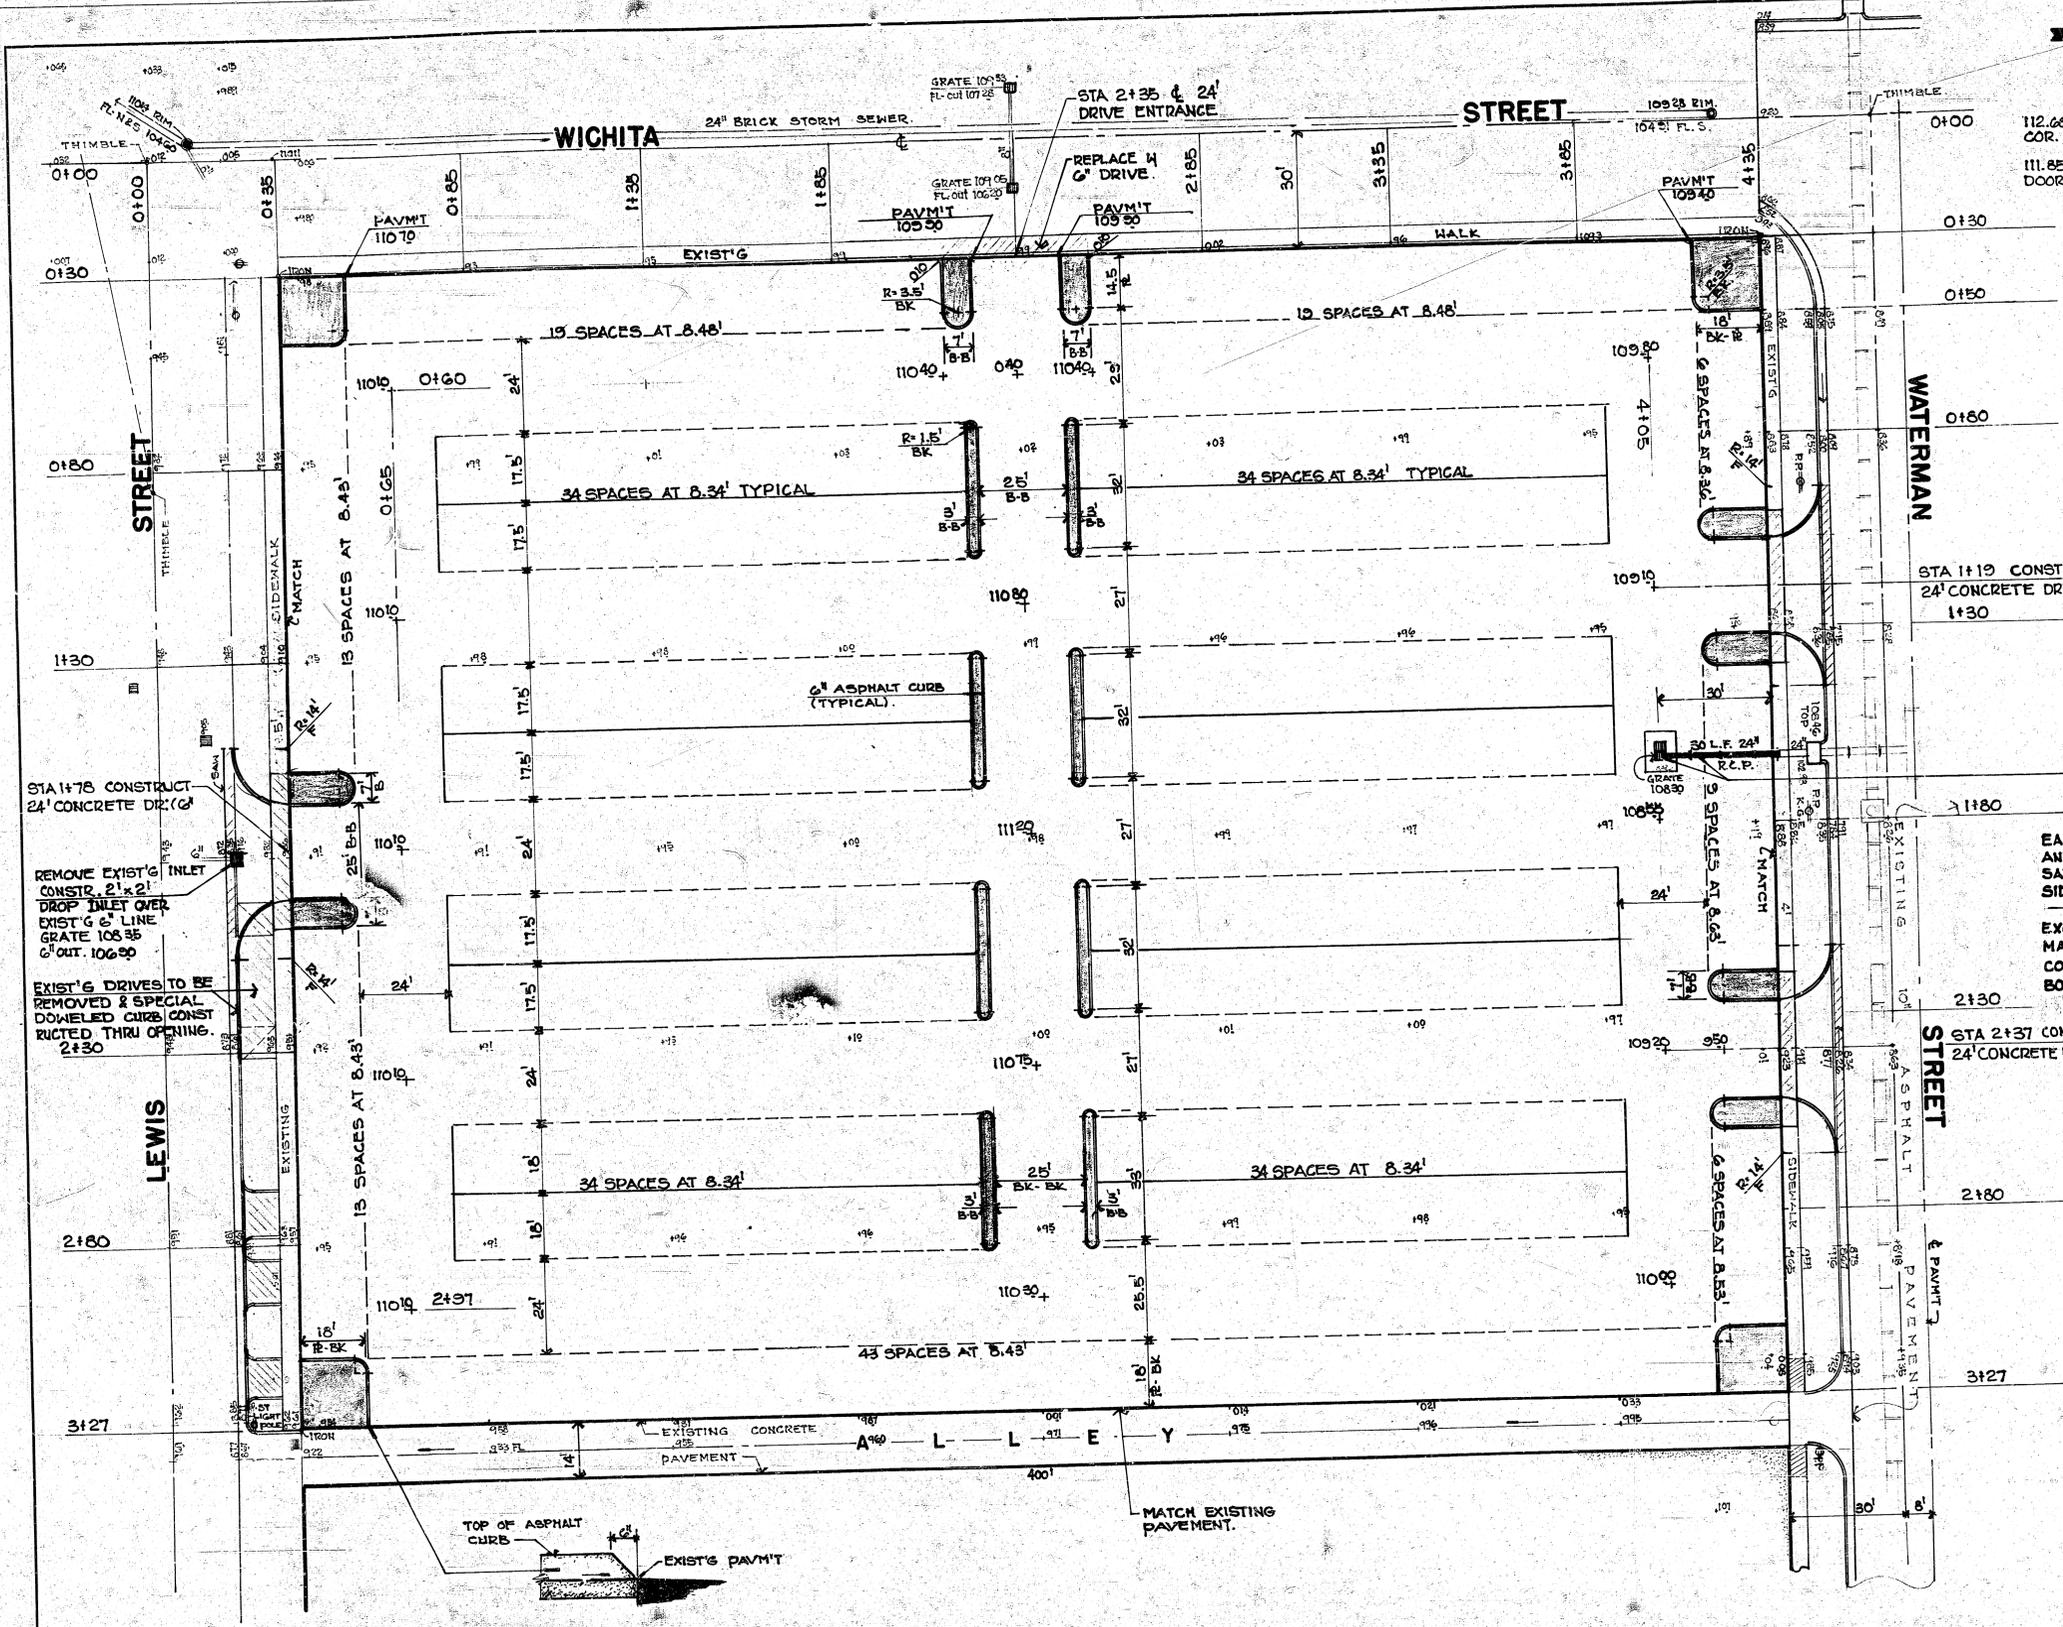

STA 1+78 CONSTRUCT
24' CONCRETE DR. (G)
REMOVE EXIST'G INLET
CONSTR. 2'x2'
DROP INLET OVER
EXIST'G G. LINE
GRATE 106.95
G' OUT. 106.90
EXIST'G DRIVES TO BE
REMOVED & SPECIAL
DOWNED CURB CON-
STRUCTED THRU OPENING.
2+30

CONSTRUCT 2'x4' DROP INLET
INSTALL 24" x 30" R.C.P.
GRATE ELEV. 106.90
24" OUT. 103.30




EARTHWORK QUANTITIES SHOWN ARE APPROXIMATE
AND FOR INFORMATION ONLY. ALL EARTHWORK NECESSARY
TO COMPLETE THE PROJECT IS TO BE SUBSIDIARY
TO OTHER BID ITEMS OF WORK.

EXCAVATION = 500 CU. YDS
MANIPULATED FILL = 820 CU. YDS
COMPACTED FILL (90% DENSITY) 215 CU. YDS
BORROW MATERIAL (CONTRACTOR FURNISH) 930 CU. YDS


NOTE: QUANTITY OF BORROW EXCAVATION
(CONTRACTOR FURNISHED) SHOWN ABOVE
DOES NOT INCLUDE A QUANTITY NECESSARY
FOR FILL IN AREAS WHERE RUBBLE, WALLS, AND
FOOTINGS MUST BE REMOVED. CONTRACTOR
WILL BE REQUIRED TO ASCERTAIN BORROW
EXCAVATION QUANTITY NECESSARY DUE TO
REMOVAL OF RUBBLE, WALLS, AND FOOTINGS
AS IDENTIFIED IN NOTE ON PLAN TITLE SHEET.

NOTE: EXISTING CHAIN LINK FENCE ON
PERIMETER OF PROJECT SITE IS TO BE
REMOVED BY THE DEPT. OF OPERATION
& MAINTENANCE - CITY OF WICHITA, KANS.

PROJECT DESCRIPTION
**CENTURY II & EXHIBITION
HALL PARKING LOT**
PROJECT NUMBER
472-76-245-81595-000-000-001 2/3

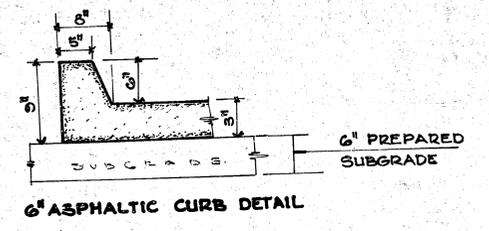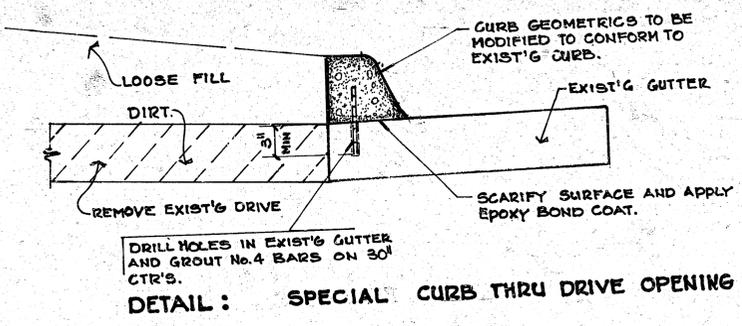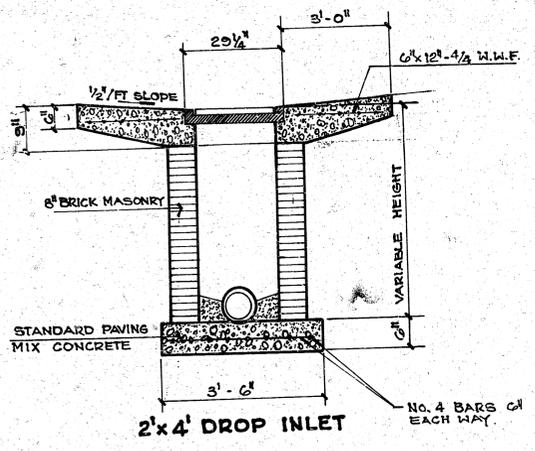

NOTE: 6" SUBGRADE TREATMENT: A BLENDED MIX OF 60% TYPE 'C' FLYASH AND 40% PORTLAND CEMENT, TO BE INCORPORATED LIKE PORTLAND CEMENT AS PER CITY SPECIFICATIONS.

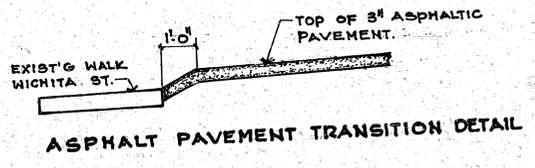

PROJECT DESCRIPTION		
CENTURY II & EXHIBITION HALL PARKING LOT		
PROJECT NUMBER		
412-76-245-81595-000-000-001		
BOOK NO.	APPROVED BY	DATE
DRAWN BY		REVISED
CITY OF WICHITA		
		SCALE
		3/3

10 0 3 5