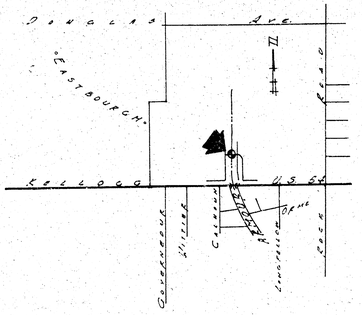

•LOCATION MAP•
No Scale

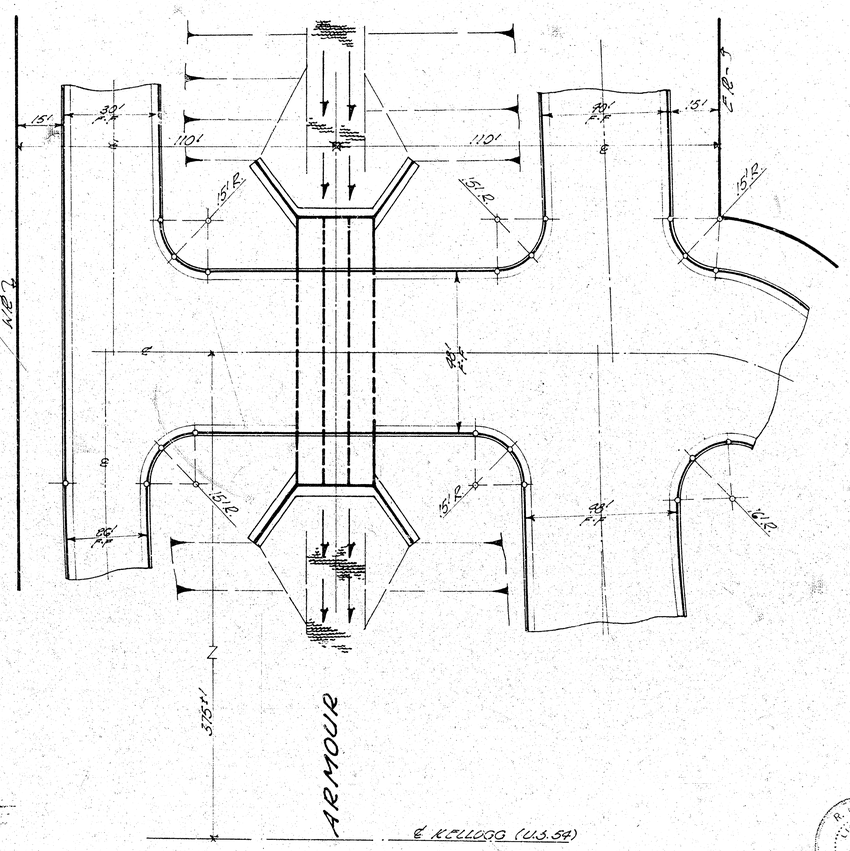

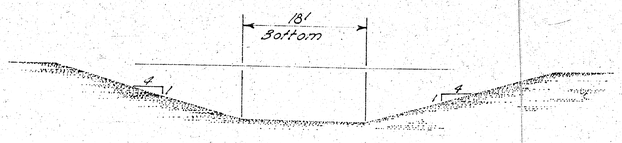

•EXISTING CHANNEL SECTION•

R. W. LUNA LICENSED 3654 KANSAS PROFESSIONAL ENGINEER

B. E. SMITH LICENSED 436 KANSAS PROFESSIONAL ENGINEER

LOCATION MAP

•3 - 7'x 7'x 80' REINF. CONC. BOX CULVERT.•

Armour Drive • N.L. U.S. Hiway 54 to 300' S. N.L. Rockwood 3rd Addition.

City of Wichita, Kansas

B.E. Smith — City Engineer

Date: July 1967 — 1/5 — Proj. No. C16-79

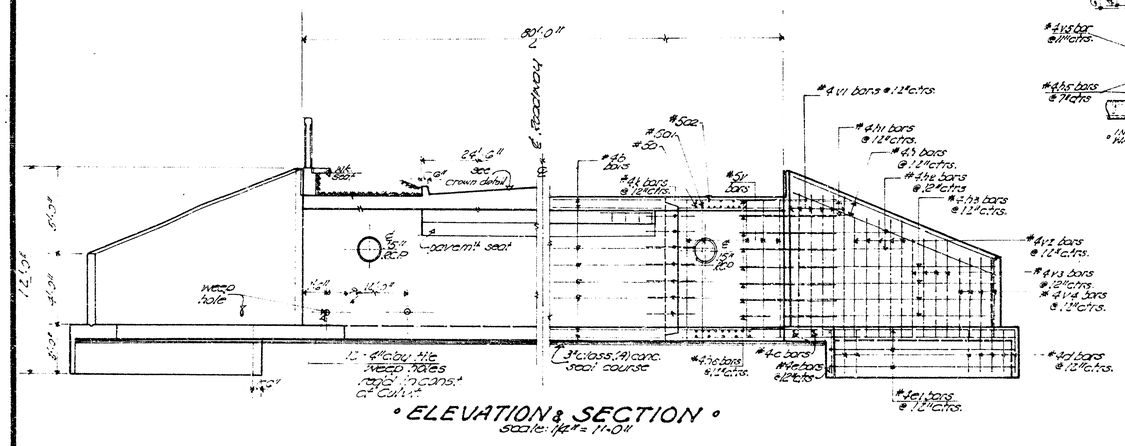

• ELEVATION & SECTION •
scale: 1/4" = 1'-0"



• HANDRAIL DETAIL •

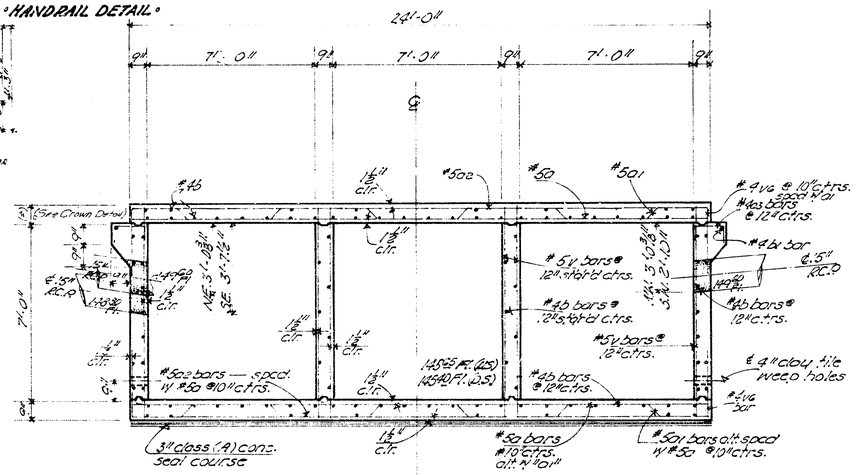

• SECTION A-A •
scale: 3/8" = 1'-0"

NOTE: Bevel all exposed edges with ¾" triangular moulding.
(*) Thickness variable 9" to 9'-3½"

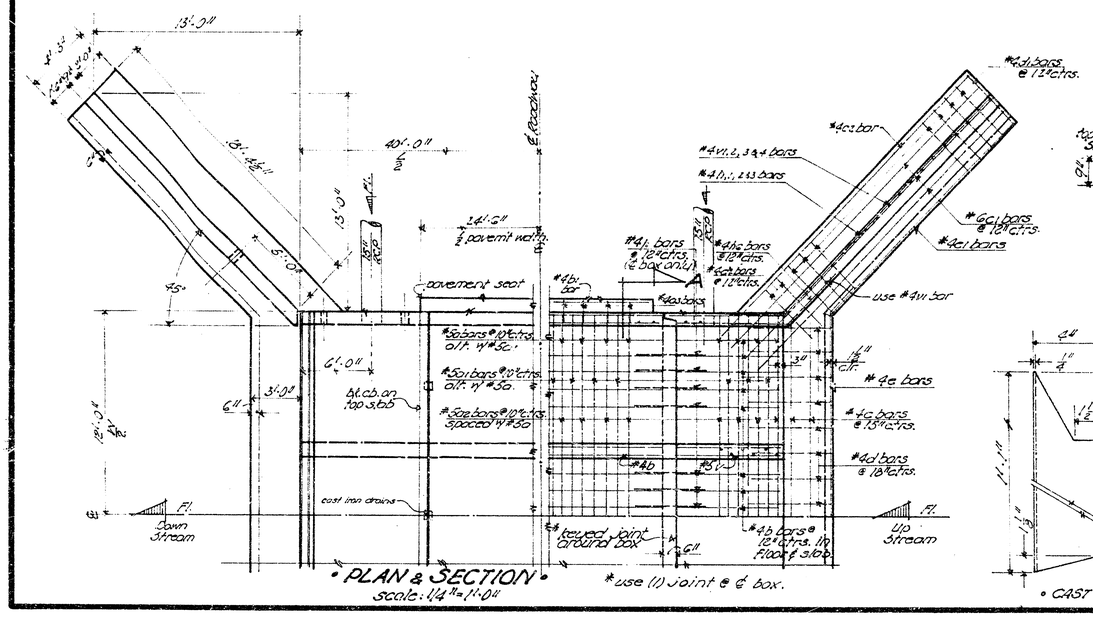

• PLAN & SECTION •
scale: 1/4" = 1'-0"

* use (1) joint @ ℄ box.

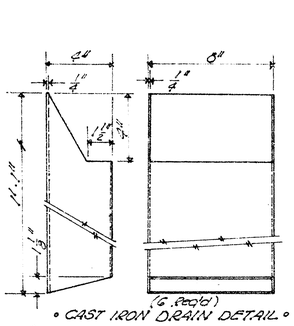

• CAST IRON DRAIN DETAIL •

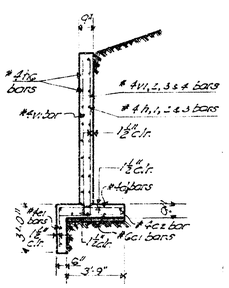

• SECTION THRU WING •
scale: 1/4" = 1'-0"

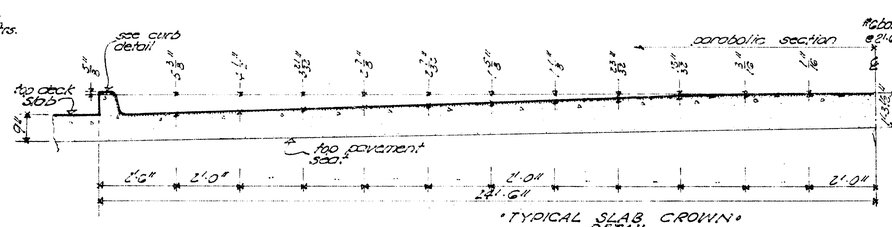

• TYPICAL SLAB CROWN DETAIL •



• REINF. CURB DETAIL •

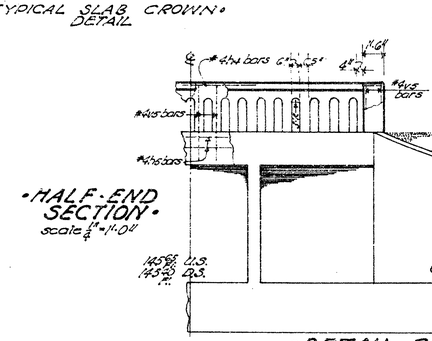

• HALF-END SECTION •
scale: 1/4" = 1'-0"

• HANDRAIL •
12 - 3'-4" spaces
2 - 6"

BAR SCHEDULE

bar	size	length	number	location	shape	spacing	weight
a	#5	25'-9"	192	box		10"	4756.08
a1	#5	25'-0"	190	"		4"	4954.25
a2	#5	25'-9"	192	"		10"	4756.09
a3	#4	2'-5"	96	"		12"	160.32
b	#4	39'-3"	200	"		12"	5243.80
b1	#4	23'-3"	4	"		-	63.46
c	#4	23'-0"	4	apron		15"	61.46
c1	#4	22'-0"	12	"		2"	396.53
c2	#4	22'-0"	4	"		-	58.78
d	#4	21'-0"	32	"		12"	140.32
d1	#4	6'-6"	68	"		"	295.24
d2	#4	41.0"	8	"		"	21.38
e	#4	28'-0"	6	"		"	112.22
e1	#4	16'-0"	12	"		"	128.24
h	#4	19'-2"	8	wingwall		"	102.43
h1	#4	8'-6"	3	"		"	45.42
h2	#4	16'-9"	8	"		"	68.14
h3	#4	20'-3"	16	"		12"	216.43
h4	#4	23'-9"	2	handrail		-	31.73
h5	#4	23'-9"	4	fubguard		7"	63.46
h6	#4	7'-0"	32	wingwall		12"	149.63
k	#4	3'-0"	76	box		"	152.30
V	#5	81'-11"	320	"		"	2976.04
V1	#4	10'-3"	24	wingwall		"	164.33
V2	#4	8'-5"	20	"		"	112.45
V3	#4	7'-9"	16	"		12"	82.83
V4	#4	6'-5"	16	"		12"	68.58
V5	#4	6'-5"	96	fubguard		11"	411.49
V6	#4	3'-0"	380	box		10"	761.52
Reinforcement in conc. curb							30.04

BILL OF MATERIALS

item	quantity	unit	
class A.AE Concrete	213.80	C.Y.	Lump Sum Bid
reinforcing steel	26,605	LBS	
concrete handrail	48	L.F.	
hand excavation	3	C.Y.	
2x5 brick inlets	10	ea.	Bid Items
15" reinf. concrete pipe	410	L.F.	
common excavation	420	C.Y.	
compacted fill	350	C.Y.	
class A concrete	61.62	C.Y.	

◦GENERAL NOTES◦

◦CLASS A.AE Concrete◦ shall be used throughout this project. All reinforcing steel shall conform to A.S.T.M. specifications.

◦EARTHWORK◦ all earthwork shall be considered as "Common Excavation" except for the toewall. Toewall Excavation shall be included in "Lump Sum Bid."

◦BACKFILL◦ shall be compacted to the bottom of new pavement grade. All backfill and excavation to extend to (2') beyond sides of box & wingwalls.

◦WEEPHOLES◦ Coarse aggregate shall be deposited behind each weephole to occupy a space extending (15") in all directions above weephole flowline. This work shall not be paid for directly, but shall be considered a part of the excavation work.

◦SEAL COURSE◦ A seal course consisting of (3") Class A concrete shall be constructed only where specified on the plans or by the Engineer. No reinforcing shall be placed until the seal course has gained sufficient strength to permit working upon it without injury.

◦BIDDING OF CULVERT◦ the culvert shall be bid as a "Lump Sum Bid" except for the following items: Cuyds. common excavation, cuyds. compacted fill, C.Y. Class A Concrete, L.F. 15" R.C.P., 2x5 brick inlets.

The quantities shown in the "BILL OF MATERIALS" for items which are included in the "LUMP SUM BID" of the culvert are for "INFORMATION PURPOSES ONLY". The Contractor must satisfy himself to the "quantities" and the Engineer assumes no responsibility for their accuracy. The Contractor will have the full responsibility for providing all materials shown on the detailed plans necessary to complete this project.

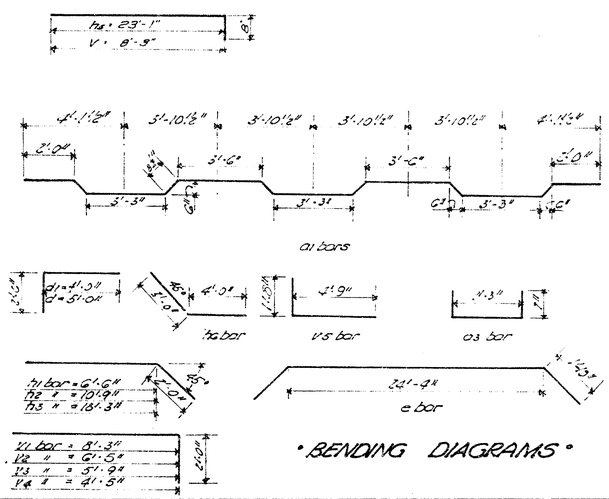

◦BENDING DIAGRAMS◦

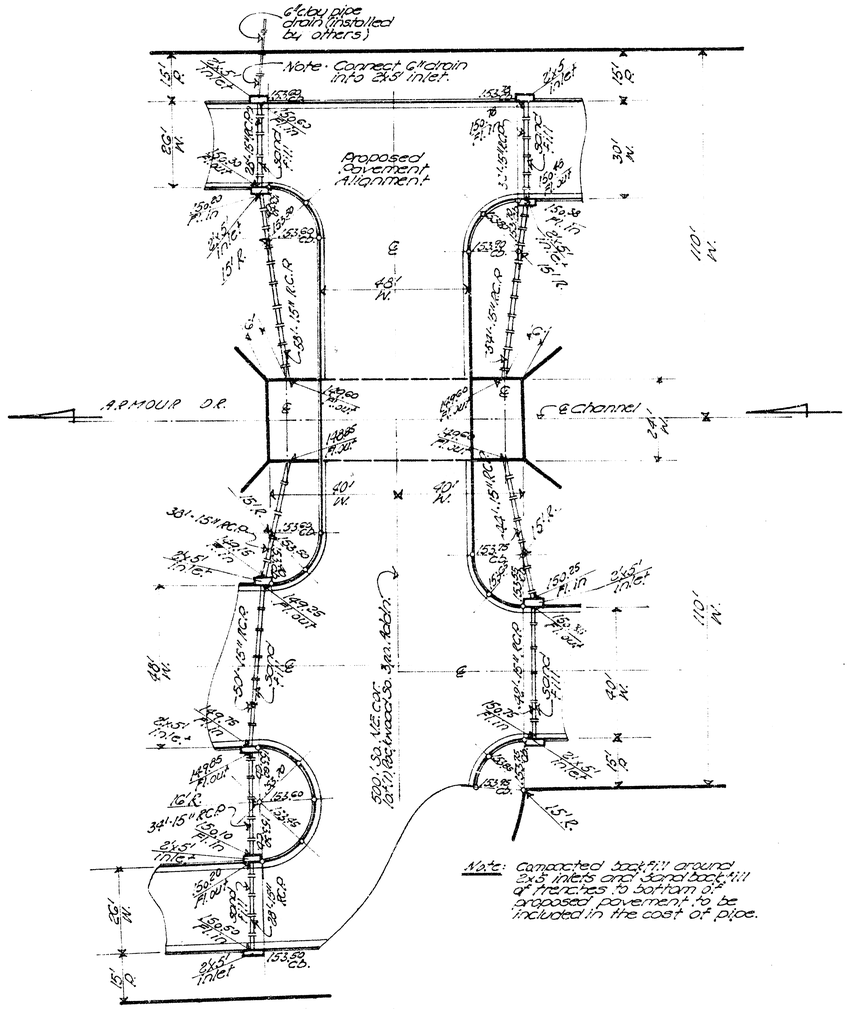
6"dia pipe drain (installed by others)
Note: Connect 6" drain into 2x3' inlet.
Proposed pavement alignment
110'
48'
30'
15'
15'
30'
15'
15'
30'
15'
15

155

3+00

155

155

Bottom of Pond

8+50

155

155

Bottom of Pond

8+06
No. End Wingwalls

155

155

Bottom of Pond

7+93
No. End R.C.B.C.

155

155

Bottom of Pond

7+73

155

155

Bottom of Pond

7+53
E.R.C.B.C.

155

155

Bottom of Pond

7+33

155

155

Bottom of Pond

7+13
So. End R.C.B.C.

155

155

7+00
So. End Wingwalls

155

155

0+50

155

155

3-7'x7' R.C.B.C.
Armour Dr. No. of
Kellogg
C.P. 5-79

50 40 30 20 10 0 0+00 - 153.50 10 20 30 40 50

E.R.C.B.C.
Existing Channel

5
5

KEUFFEL & ESSER CO. MADE IN U.S.A.

K&E STANDARD © CROSS SECTION