


BM = 122.27 'G' in Globe Top E. Curb Dougherty at N.L. 8th Street.
 BM = 123.26 'G' in Globe Top N. Curb 9th Str. at W.L. Dougherty North.
 BM = 122.47 S.W. Corner Concrete Step Ho# 844 N. Nevada Street.

Base Line is on North Property Line.

Scale 1"=20'

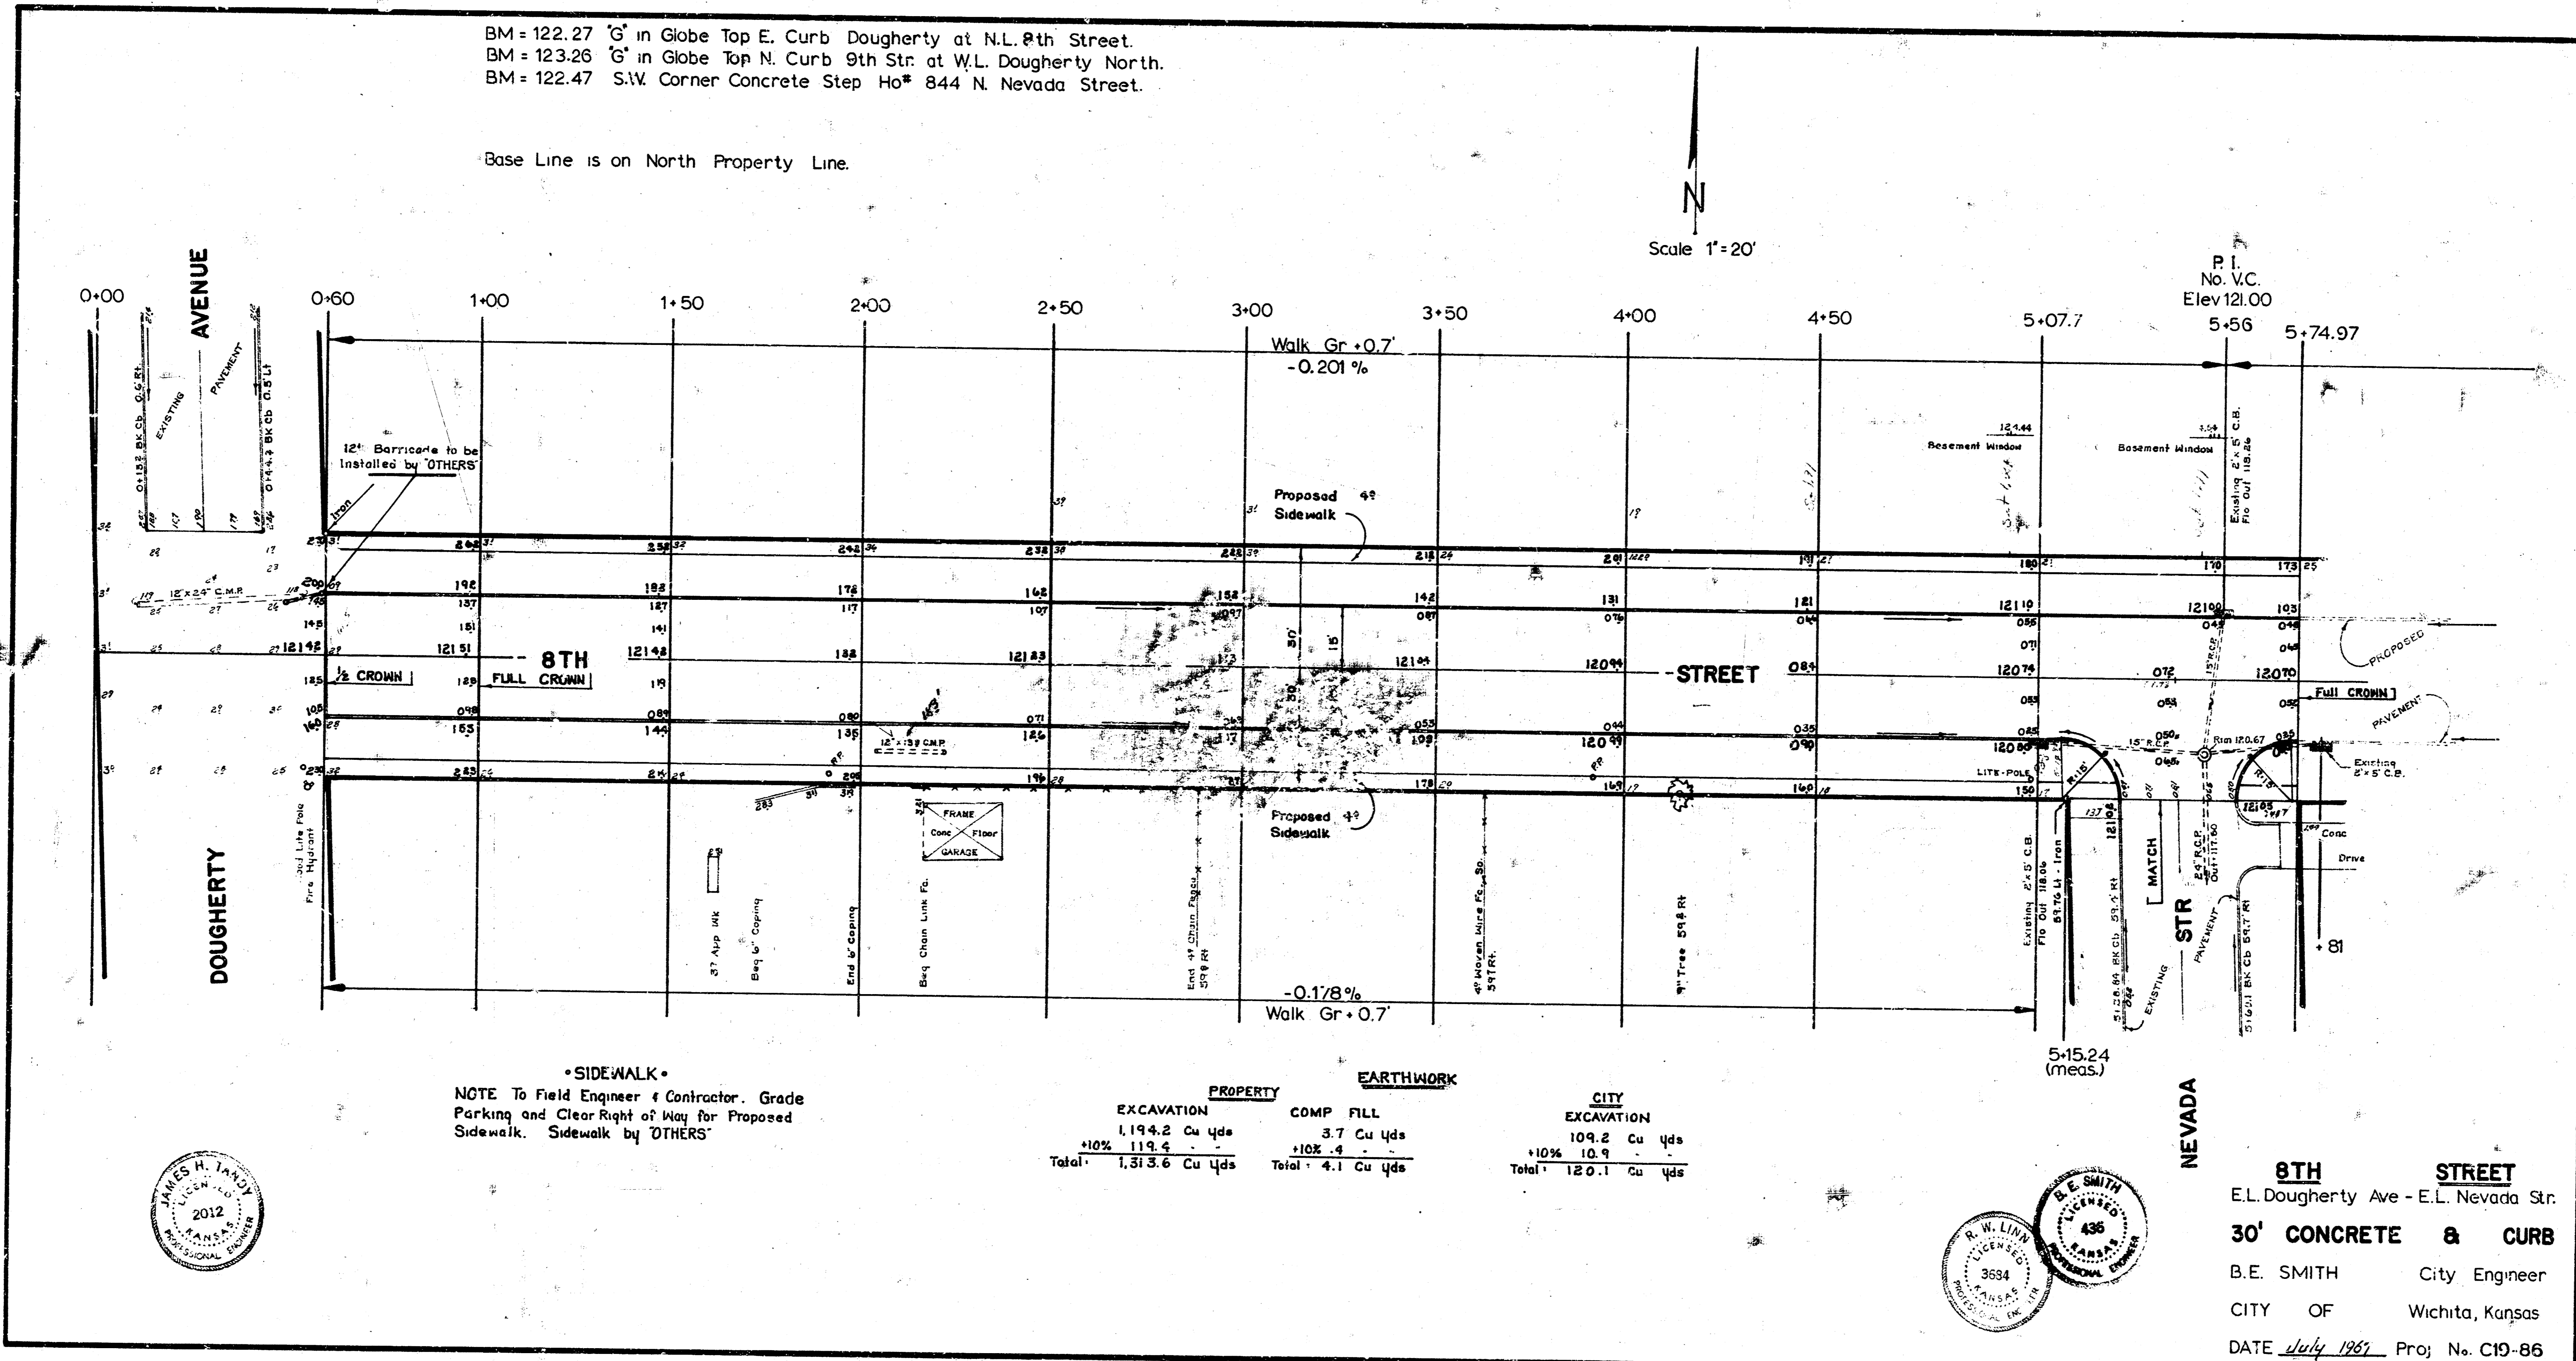

Survey Check
 Plan Entered
 Ex. Civil
 Checked

SIDEWALK
 NOTE To Field Engineer & Contractor. Grade
 Parking and Clear Right of Way for Proposed
 Sidewalk. Sidewalk by 'OTHERS'

PROPERTY		EARTHWORK		CITY	
EXCAVATION	COMP FILL	EXCAVATION	COMP FILL	EXCAVATION	COMP FILL
1194.2 Cu Yds	3.7 Cu Yds	109.2 Cu Yds	10.9	109.2 Cu Yds	10.9
+10% 119.4	+10% .4	+10% 10.9	10.9	+10% 10.9	10.9
Total 1,313.6 Cu Yds	Total 4.1 Cu Yds	Total 120.1 Cu Yds		Total 120.1 Cu Yds	



NEVADA
8TH STREET
 E.L. Dougherty Ave - E.L. Nevada Str.
30' CONCRETE & CURB
 B.E. SMITH City Engineer
 CITY OF Wichita, Kansas
 DATE July 1987 Proj. No. C19-86