


Survey by J. R. G., Bk. No. 160
 Plan by J. R. W.
 Excavation by J. R. W.
 Checked by J. R. W.


B.M. 161.23 N.W. cor. conc. Parch. Ho. on N.E. cor. Maus Ln. & 12th St.
 B.M. 161.78 N.W. cor. conc. Parch. Ho. on brick Ho. # 1332 Caddy Lane.
 Baseline on south 12.

NOTE:
 All excavated material that is not needed
 on this Project is to be used on Maus Lane
 from No. 5 68030 (Approx. 350 cu yds)
 Contractor to grade parking and compact
 Fill for Proposed sidewalk. Sidewalk to be
 constructed by others.

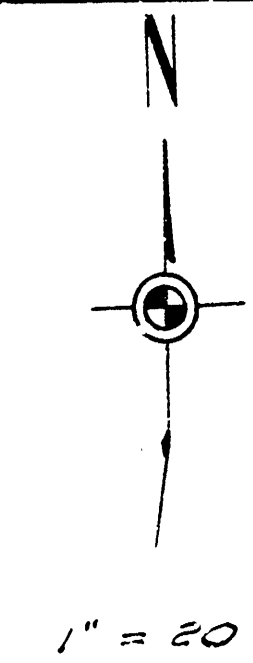

W. L. Westlink Village
 8th Addition

NOTE:
 Install 24 Lin. ft.
 of Type I barricade
 by others.

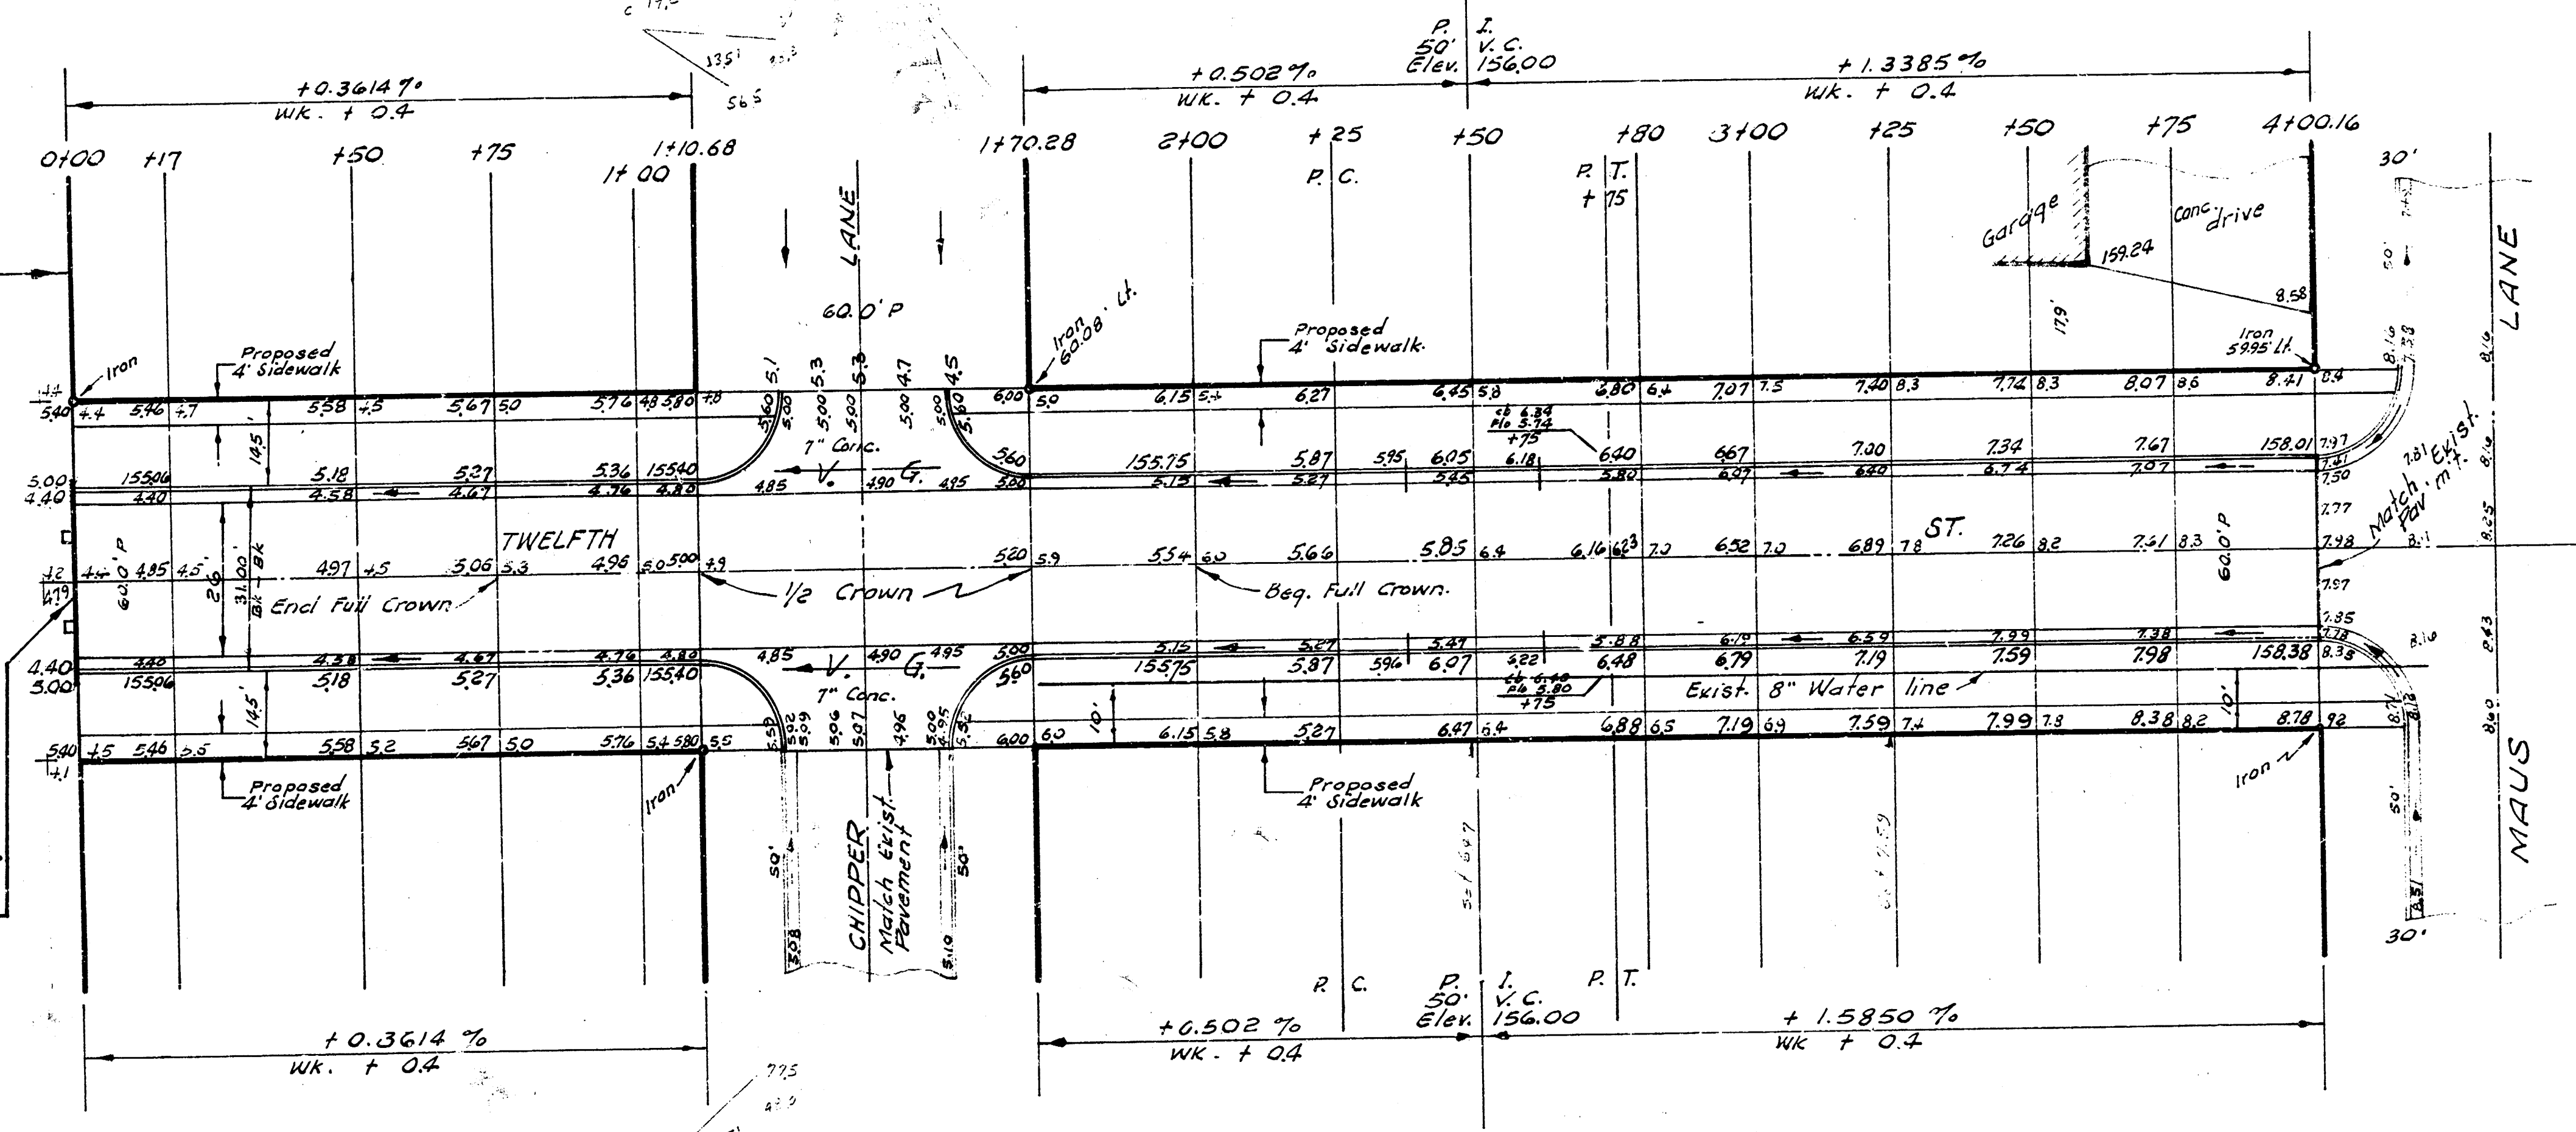

Excavation		City		EARTHWORK		Excavation		Prop.		Fill Comp.	
-10%	107.4	Cu Yds	2.7	Cu Yds	373.4	Cu Yds	12.4	Cu Yds	1.2	Cu Yds	13.6
Totals	118.1	" "	3.0	" "	411.0	" "					

CITY
 350 Sq yds of lime treated sub-grade.
 PROP
 1290 Sq yds of lime treated sub-grade.



TWELFTH STREET
 W. L. WESTLINK VILLAGE 8TH ADDN. TO W. L. MAUS LANE
 31' CURB & GUTTER A. C.
 CITY OF WICHITA, KANSAS
 R. W. LINN - CITY ENGINEER
 JULY 1971 PROJECT NO. DAKS 5 68048