


NOTE:

Elev shown are for ROLL CURB

B.M. 12955 R.R. Spl. E.S. P.P. on S.E. Cor. Bell & West Dale Dr.
B.M. 13037 R.R. Spl. E.S. P.P. on S.E. Cor. 19th & West Dale Dr.

NOTE: To Field Eng'rs & Contrs
Place Asphalt on Side Slopes
of Road to provide for drainage
and erosion control.
See sketch Sheet 3.

CHAS. J. SMITH
CITY ENGINEER
WICHITA, KANSAS

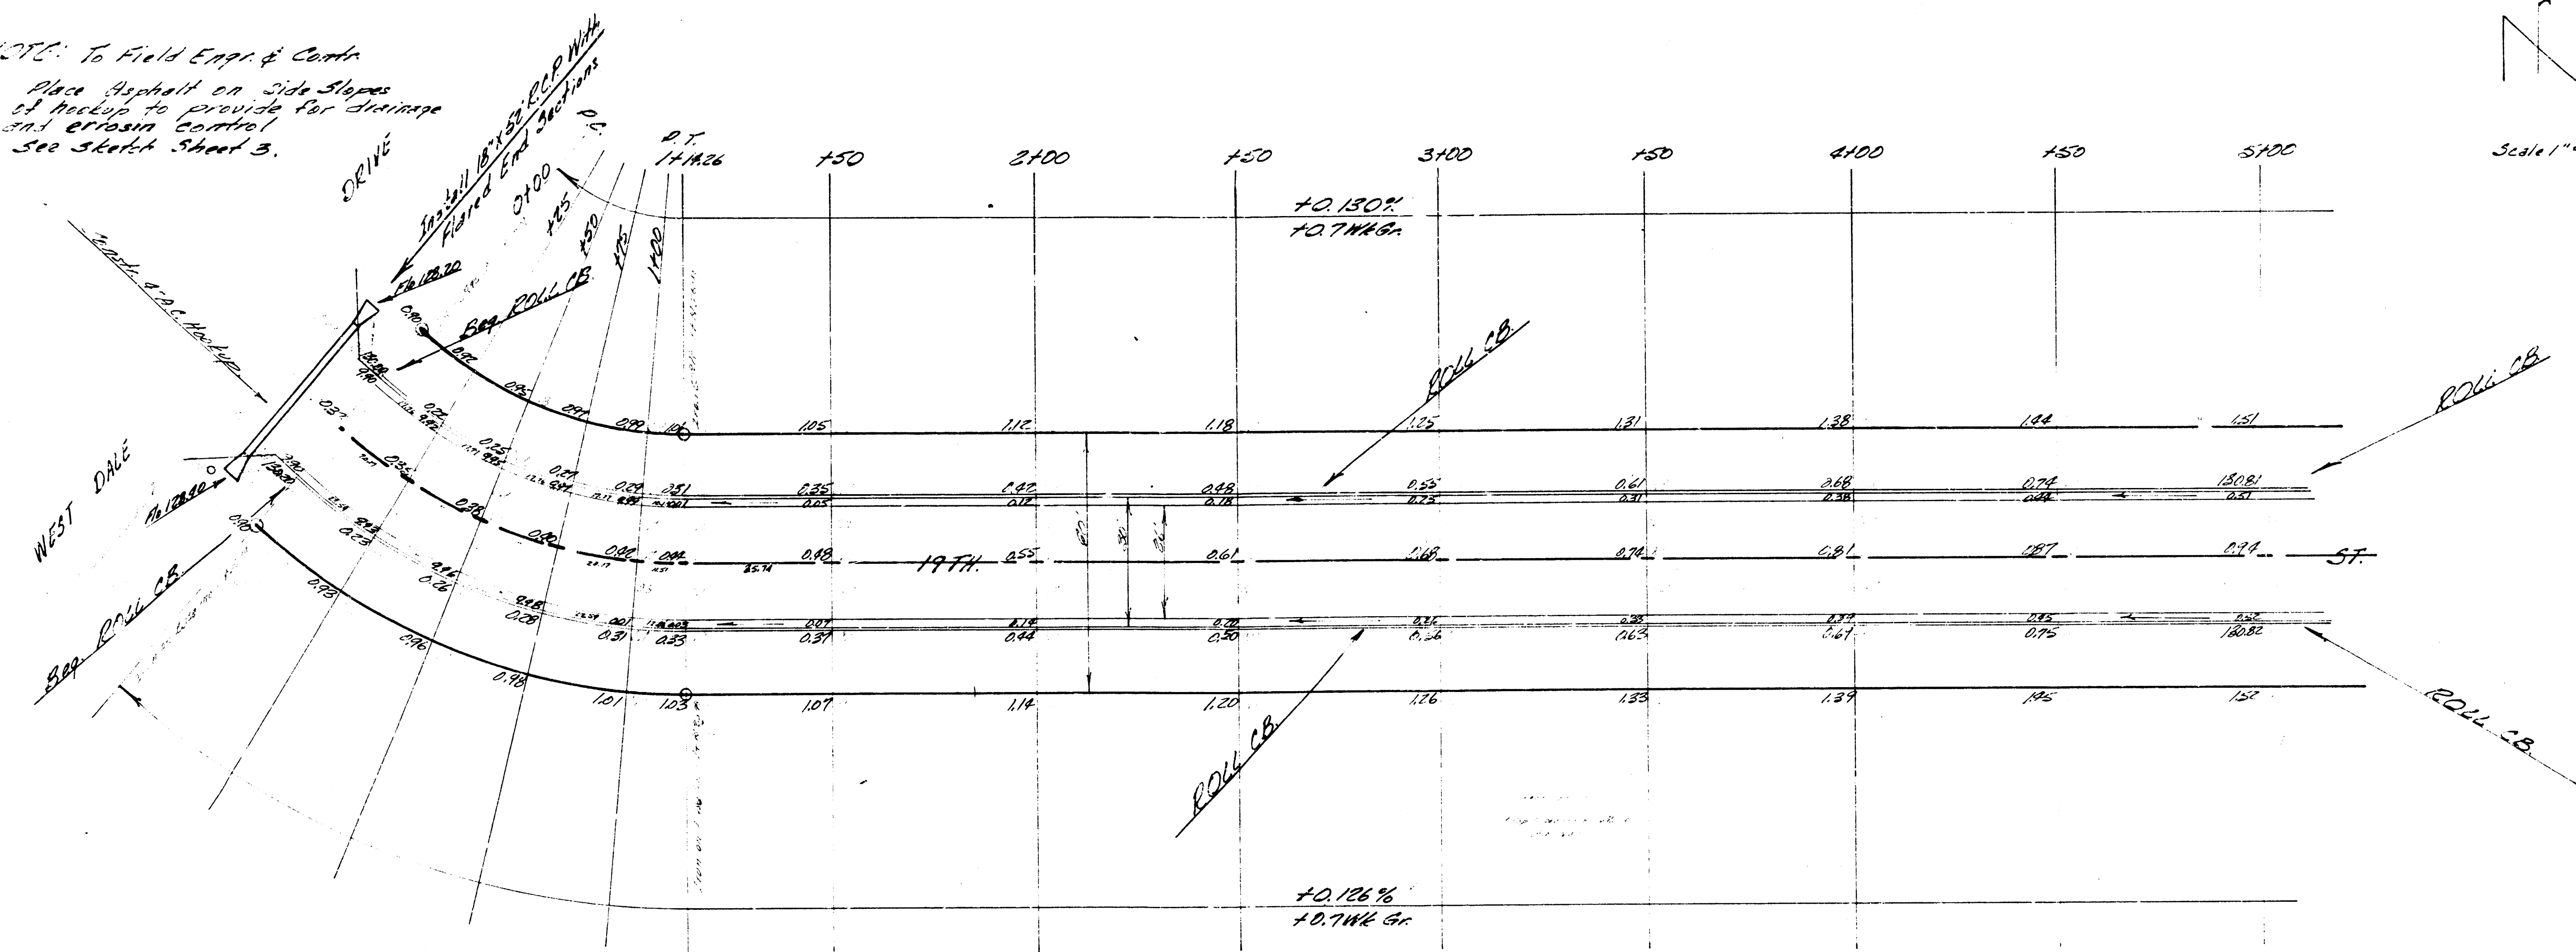

CURVE DATA BASED ON S.R. P. 155.47 $\Delta = 92^{\circ}06'30''$

STA	ARC	CHORD	CHORD BEARS	DEFLECTION	TOTAL DEFLECTION
P.C. 1100					
125	25	16.46	25.85	4° 36' 28"	4° 36' 28"
150					9° 12' 56"
175					13° 49' 12"
1100	25	16.46	25.85	4° 36' 28"	18° 25' 56"
P.T. 11426	1426	9.89	13.61	2° 51' 59"	21° 05' 15"


11.0560 MIN/IN.

Excavation

Prop.	City
586.3 CY	14.3 CY
58.6 +10%	1.3 +10%
644.9 CY Total	15.7 CY Total


Comp. Fill

Prop.	City
114.5 CY	69.2 CY
11.4 +10%	6.8 +10%
125.9 CY Total	76.0 CY Total

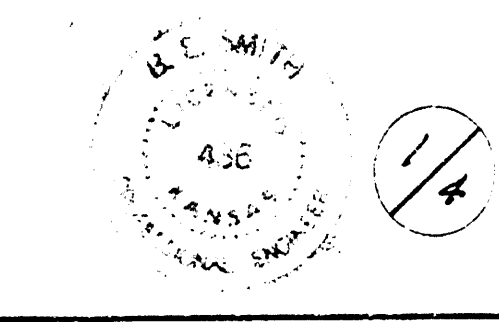

19th St
E. West Dale Dr to W. West 5th
26' - 8' - 30" AC
CITY OF WICHITA, KANSAS
B. E. SMITH, CITY ENGINEER
DATE Aug. 1935 PROFILE 219.18

B.M. 13158 R.R. Spt. W.S. P.P. on S.E. Cor. 14th St. E. & West St.

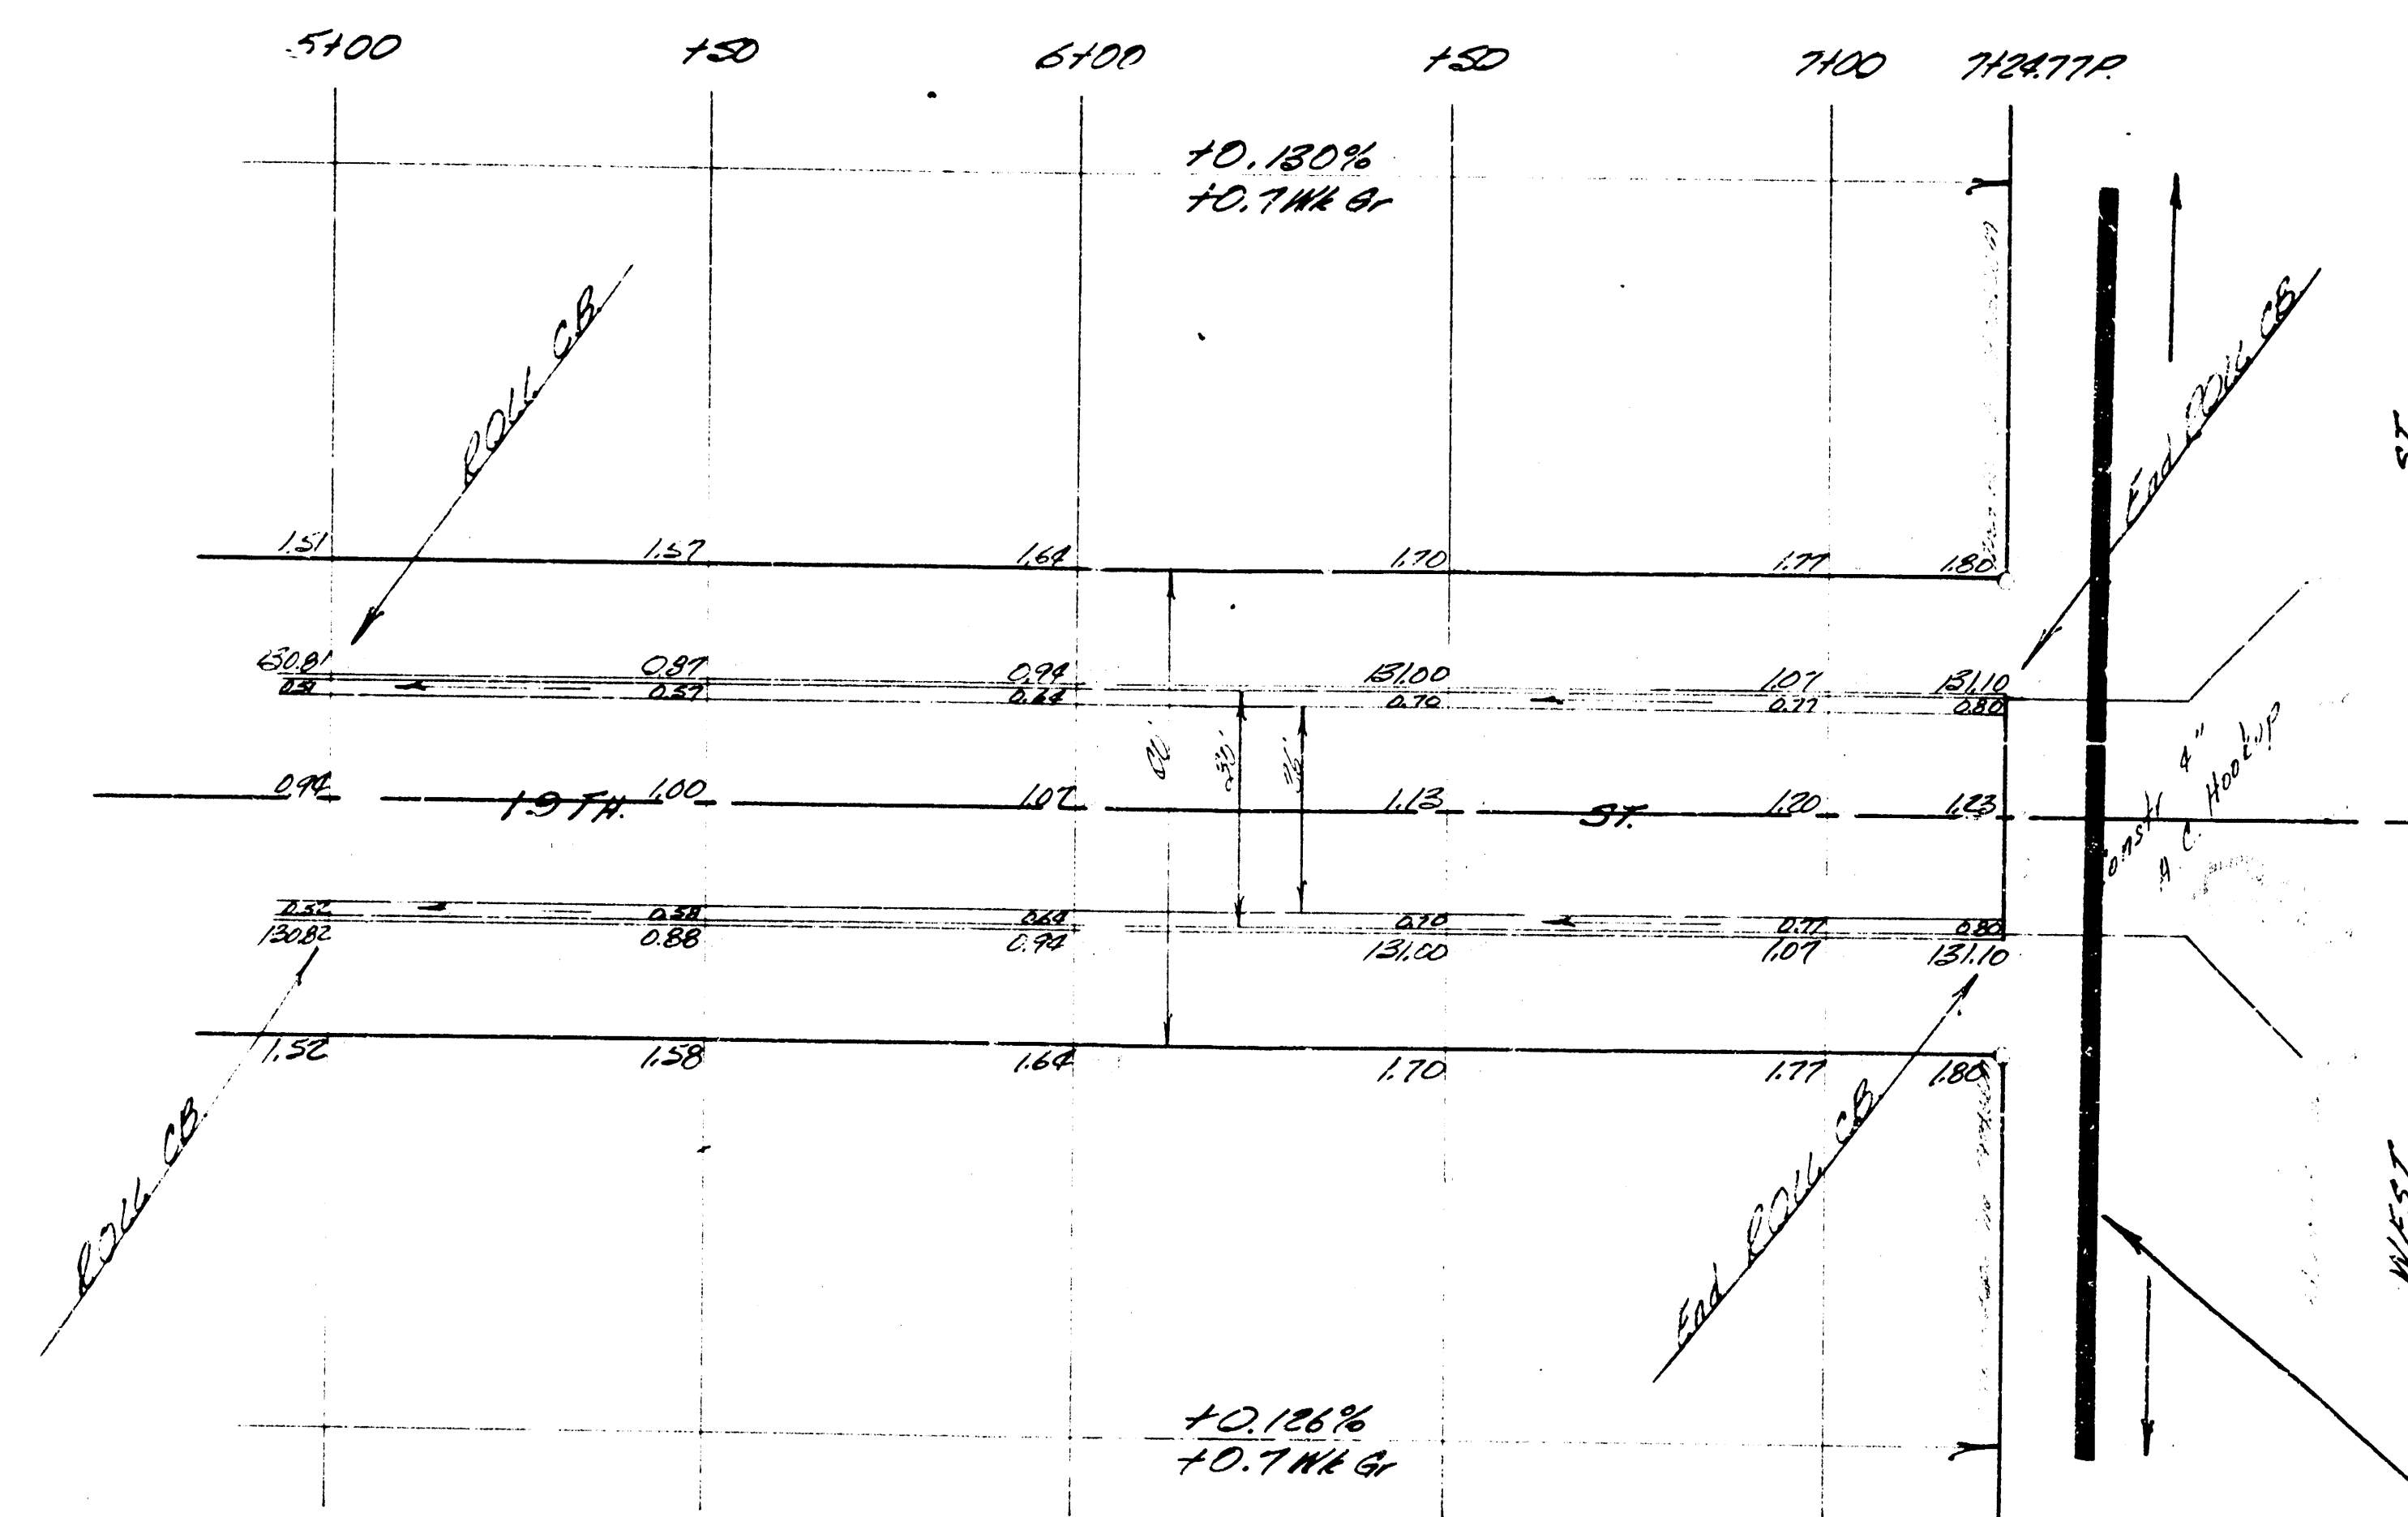

NOTE: To Field Eng. & Contractor
Fill West ditch on West St. to drain
N.E. from 14th.

NOTE:
Prop. San. Sewer Location. Do Not
Construct High Hub up until sewer
cut in is completed.

2/4

Proj. No. C19-118