
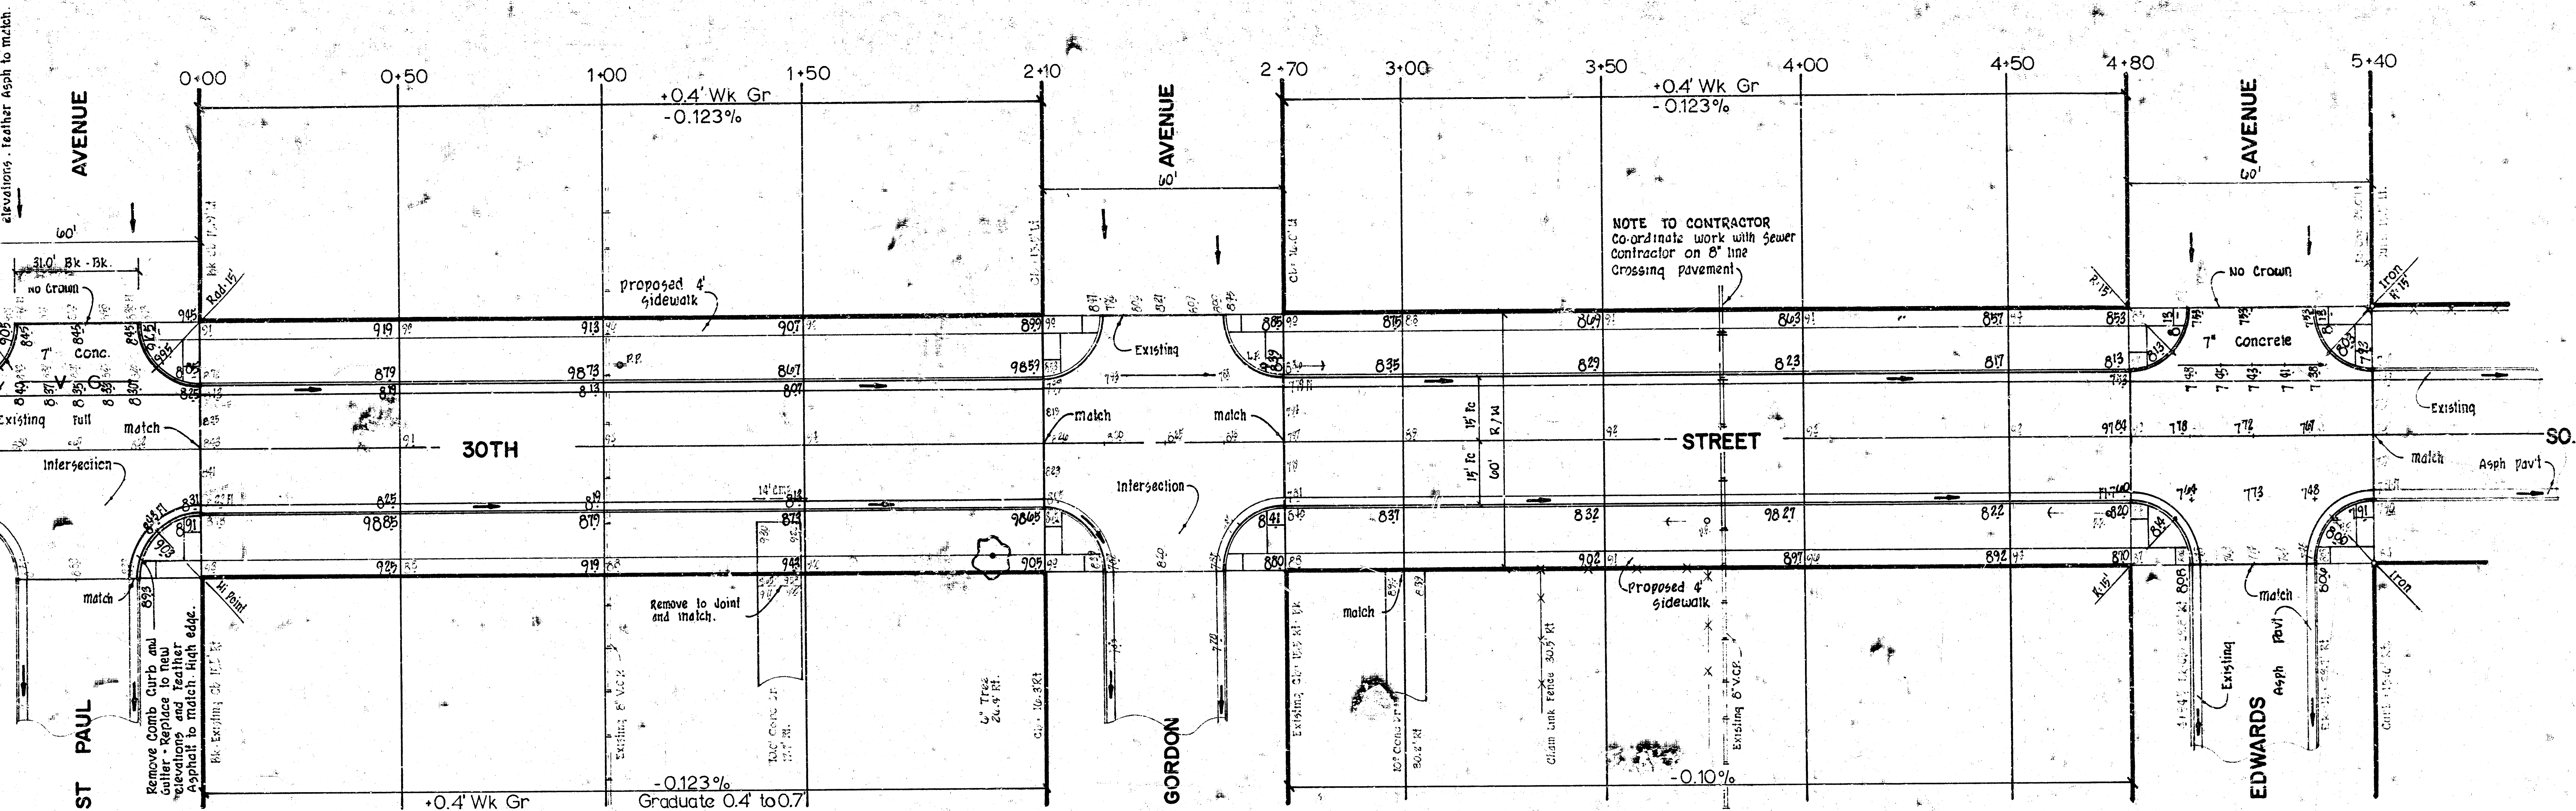


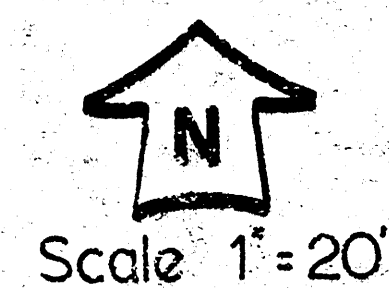

NOTE TO CONTRACTOR.
All excess excavated material from this project to be delivered to the two paving projects on St. Paul Ave; Project Nos. C10-31 & C10-32. Contractors to co-ordinate these three projects.

Note:
Type of subgrade treatment to be determined by field engineer.

EARTHWORK

Property	City
Excavation	Excavation
614.8 Cu Yds	120.3 Cu Yds
110% 61.5	110% 12.0
670.3 Cu Yds	138.9 Cu Yds
Lime or Cement Treatment: 1,590.0 Sq. Yds	440.0 Sq. Yds.



30TH STREET SOUTH.
E.L. ST PAUL To E.L. EDWARDS
CITY of WICHITA, KANSAS.
26'-2" - 30' ASPHALTIC CONCRETE
B.E. SMITH CITY ENGINEER
DATE Aug 1977 Project No. C10-16