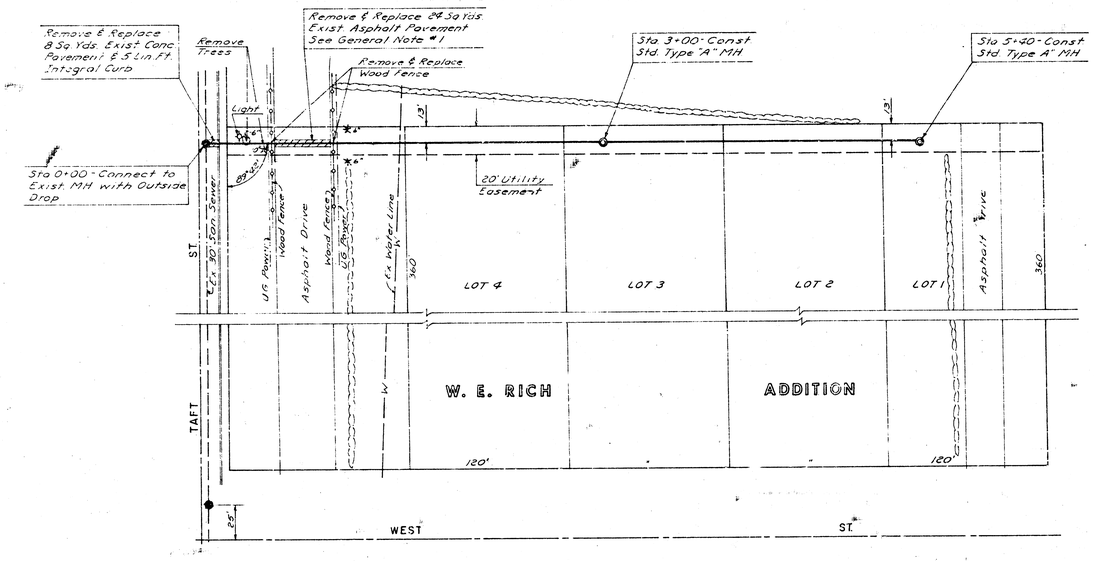

Scale: 1" = 40'

GENERAL NOTES

1. Contractor shall insure that entrance to Drive in Theatre is left open to traffic after 6:00 P.M. This shall be accomplished by either completing excavation, laying of pipe and back-filling by this time or by phasing construction to insure that one half of pavement will be left open to traffic. Contractor shall notify manager of theatre prior to beginning construction. Min. Pvmt thickness = 5"
2. Contractor shall be responsible for verifying location of underground power lines and water line prior to excavating the trench. Care shall be exercised so that these lines are not disturbed.
3. Contractor shall install a 5' stub and plug pipe on the North side of manhole at Sta. 3+00. This point is the end of Phase 1 construction.

APPROVED FOR
BY
5-16-74 DPB

NOTE TO APPROVER
[illegible]

ESTIMATE OF QUANTITIES

Item	Phase 1	Phase 2
8" V.C.P. Lin. Ft.	305	235
Type "A" Manhole Ea.	1	1
Connect to Exist. Manhole Ea.	1	
Remove & Replace Conc. Pvmt. S.Y.	8	
Remove & Replace Asphalt Pvmt. S.Y.	24	
Remove & Replace Integral Curb L.F.	5	
Flushed Sand Fill in Place Tons	198	113
Trees Removed Ea.	2	
Remove & Replace Wood Fence L.S.	L.S.	L.S.

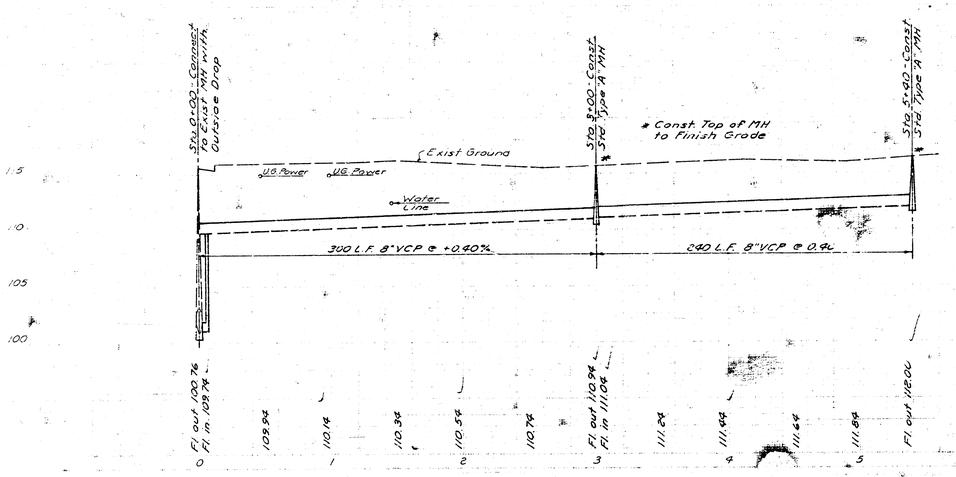

PLAN PROFILE
SANITARY SEWER
DBK/MDJ/CB