


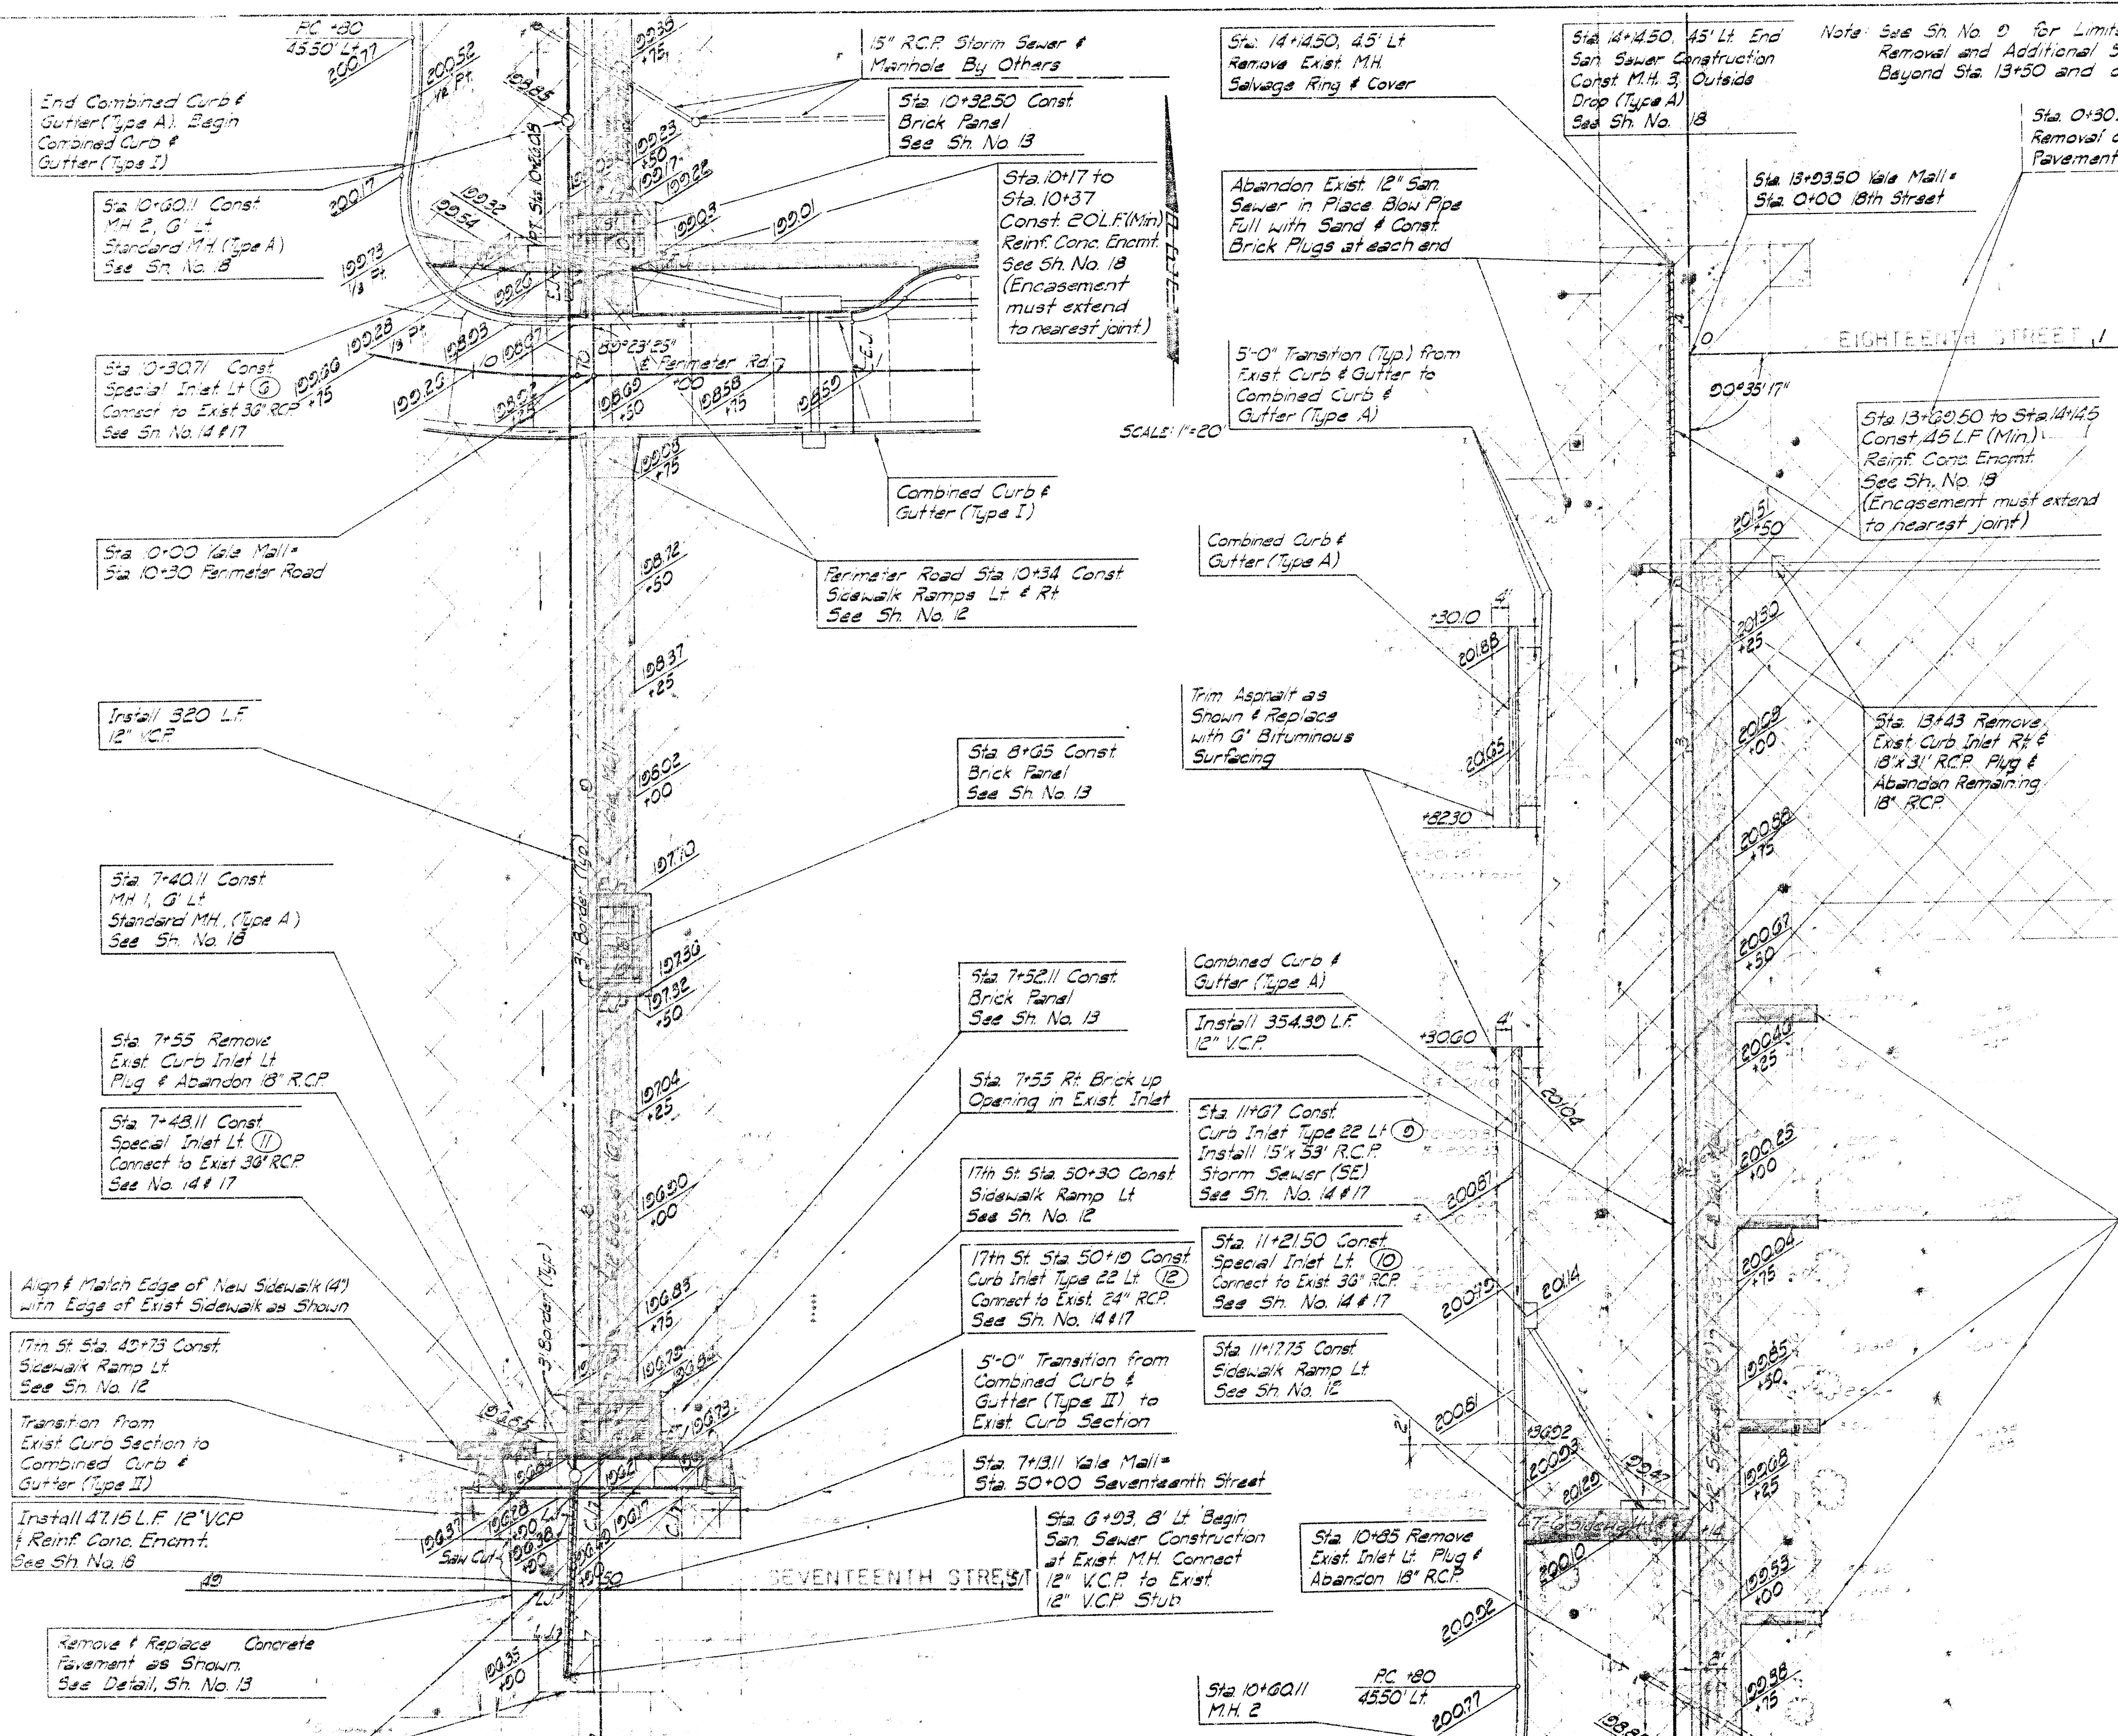


- GENERAL NOTES
- THE CONTRACTOR WILL BE REQUIRED TO NOTIFY EACH OF THE FOLLOWING UTILITY COMPANIES PRIOR TO THE BEGINNING OF CONSTRUCTION AND SHOULD REQUEST THAT ANY EXISTING LINES BE FLAGGED.
 - KANSAS GAS & ELECTRIC COMPANY
1900 EAST CENTRAL
264-1111
 - GAS SERVICE COMPANY
1021 EAST 26TH STREET NORTH
261-7311 ENGINEERING DEPARTMENT
 - CITY OF WICHITA WATER DEPARTMENT
405 NORTH MAIN STREET
268-4557 BENNY CECEN
 - SOUTHWESTERN BELL TELEPHONE COMPANY
154 NORTH BROADWAY
262-5500
 - THE CONTRACTOR MUST ALSO NOTIFY THE TELEPHONE COMPANY 24 HOURS PRIOR TO BEGINNING ANY CONSTRUCTION WORK NEAR BURIED TELEPHONE LINES.
 - PRIOR TO BEGINNING ANY SANITARY SEWER CONSTRUCTION WORK THE CONTRACTOR SHALL UNCOVER THE ELECTRICAL DUCT BANK (STA. 13+75). THE VERTICAL ALIGNMENT OF THE PROPOSED 12" SANITARY SEWER MAY VARY FIELD ADJUSTED DEPENDING UPON ACTUAL ELEVATIONS OF THE ELECTRICAL DUCT BANK. FINAL ELEVATION IN THIS AREA WILL BE DETERMINED BY ENGINEER.
 - THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING CONTINUOUS FLOW OF SEWAGE THROUGH CONSTRUCTION. CONTRACTOR'S PROPOSED METHOD FOR MAINTAINING SEWAGE FLOW SHALL BE APPROVED BY THE ENGINEER. COST OF MAINTAINING FLOW OF SEWAGE THROUGH CONSTRUCTION WILL NOT BE PAID FOR DIRECTLY AND THIS COST SHALL BE CONSIDERED AS SUBSIDIARY TO THE OTHER ITEMS OF WORK. NO PAYMENT WILL BE MADE FOR EXTRA MANHOLES CONSTRUCTED BY THE CONTRACTOR FACILITATE HANDLING SEWAGE THROUGH CONSTRUCTION AS THIS COST SHALL BE CONSIDERED SUBSIDIARY TO THE OTHER ITEMS OF WORK.
 - REINFORCED CONCRETE ENCASEMENT SHALL NOT BE PAID FOR SEPARATELY AND SHALL BE CONSIDERED SUBSIDIARY TO THE PRICE BID FOR THE 12" VCP SANITARY SEWER.
 - THE CONTRACTOR SHALL MAKE ARRANGEMENTS WITH THE ENGINEERING DIVISION OF THE DEPARTMENT OF PUBLIC WORKS FOR AIR TESTING, AND TELEVISION INSPECTION OF THE SANITARY SEWER IMPROVEMENT. ALL COSTS FOR AIR TESTING AND TELEVISION INSPECTION SHALL BE PAID FOR BY THE CONTRACTOR AND SHALL BE CONSIDERED SUBSIDIARY TO THE PRICE BID FOR 12" VCP SANITARY SEWER.
 - ALL TRENCH BACKFILL FOR 12" VCP SANITARY SEWER SHALL BE "SHOCK" TYPE 1" (SEE SPECIFICATIONS, SECTION 1, SANITARY SEWER CONSTRUCTION).
 - SALVAGED RING AND COVER SHALL BE USED IN THE CONSTRUCTION OF STA. NO. 3.
 - CONSTRUCTION OF 15" RCP STORM SEWER BY OTHERS, YALE MALL STA. 10+75, SHALL BE COORDINATED WITH THE WORK ASSOCIATED WITH YALE MALL IMPROVEMENTS.
 - DITCHING OF OPENING OF EXISTING INLET, YALE MALL STA. 7+55 RT. SHALL BE CONSIDERED SUBSIDIARY TO THE PRICE BID FOR CURB INLET TYPE 22.


Align & Match Edge of New Sidewalks (4") with Edge of Exist. Sidewalk as Shown

UTILITIES	
Water	City of Wichita
Gas	Gas Service Co.
Telephone	SW Bell
Power	KGE
San Sewer	City of Wichita
Traffic Signals	City of Wichita


See Sh. No. 5 for Sanitary Sewer & Yale Mall Profiles.

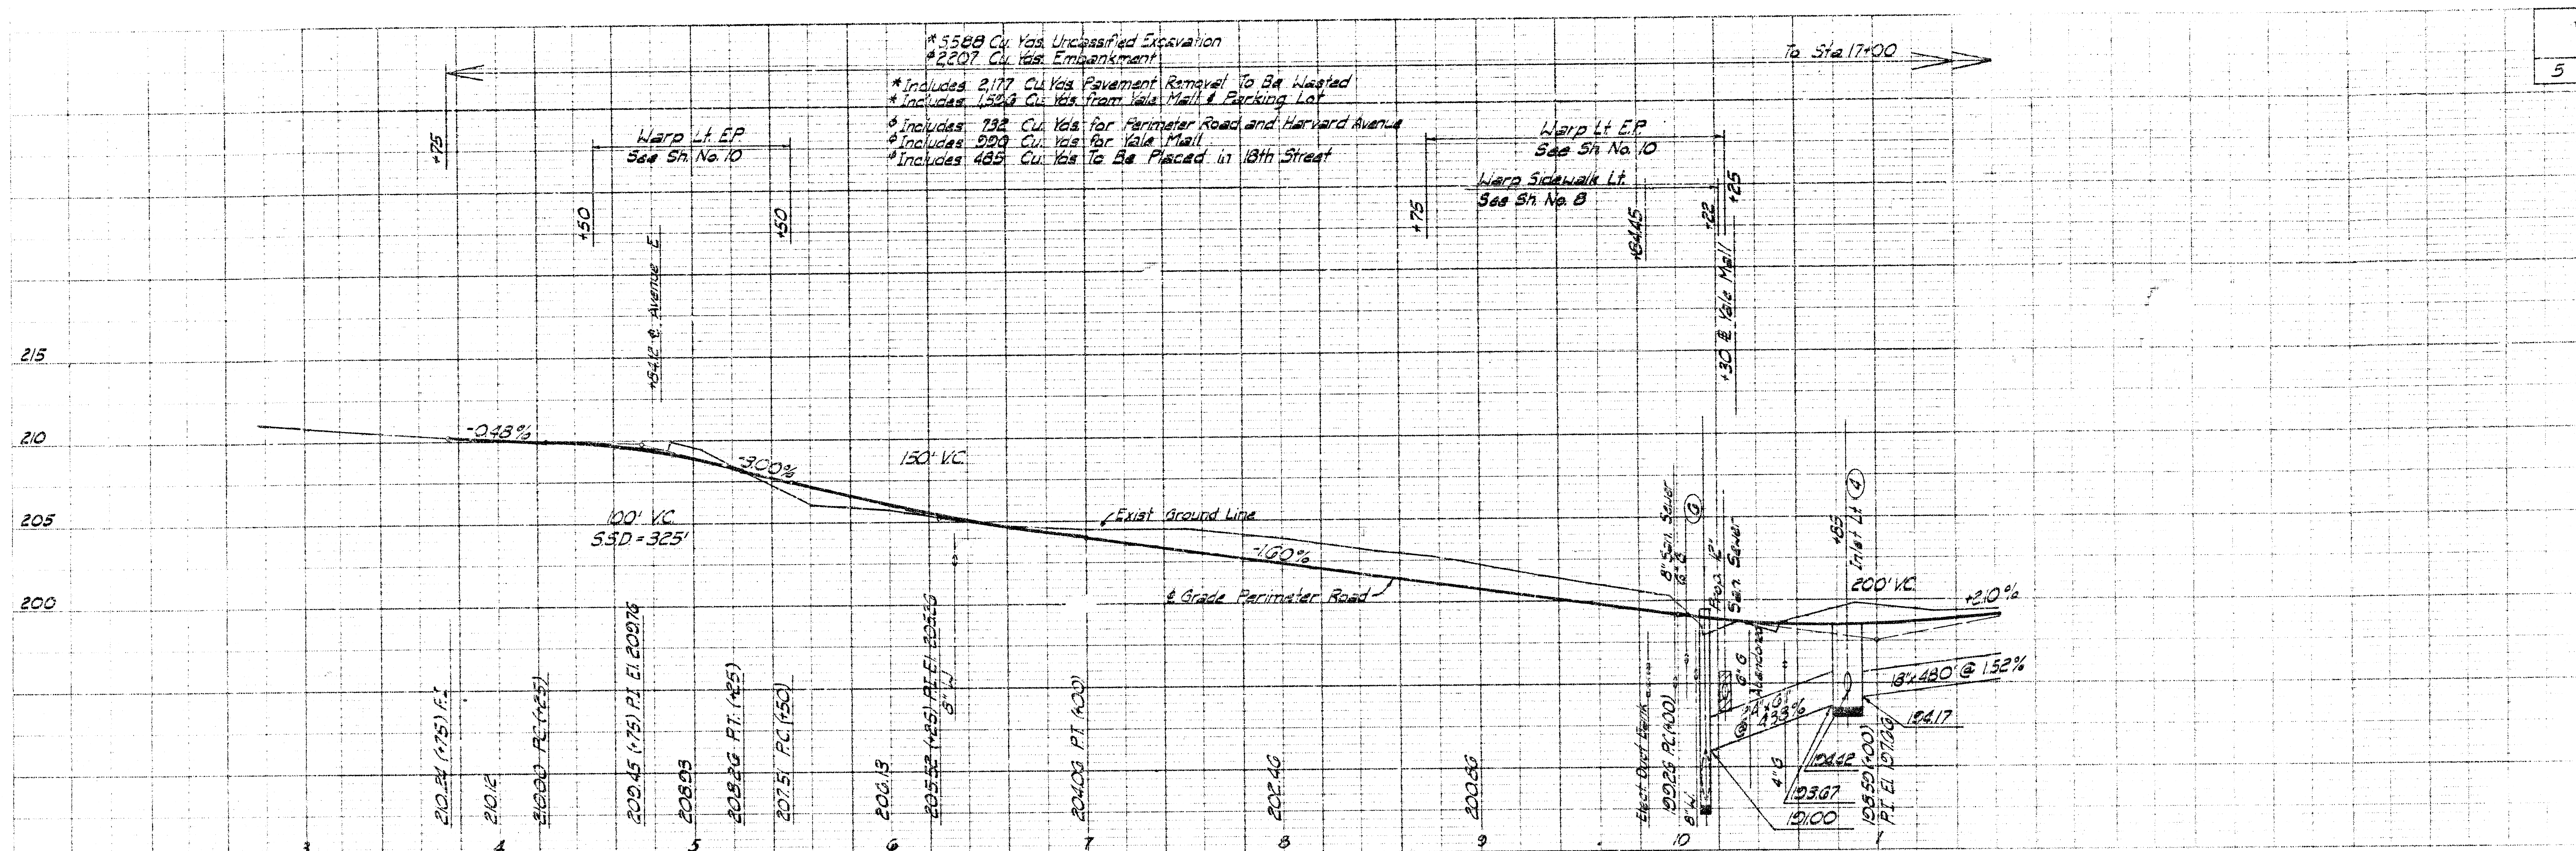


PERIMETER ROAD SECTION 2

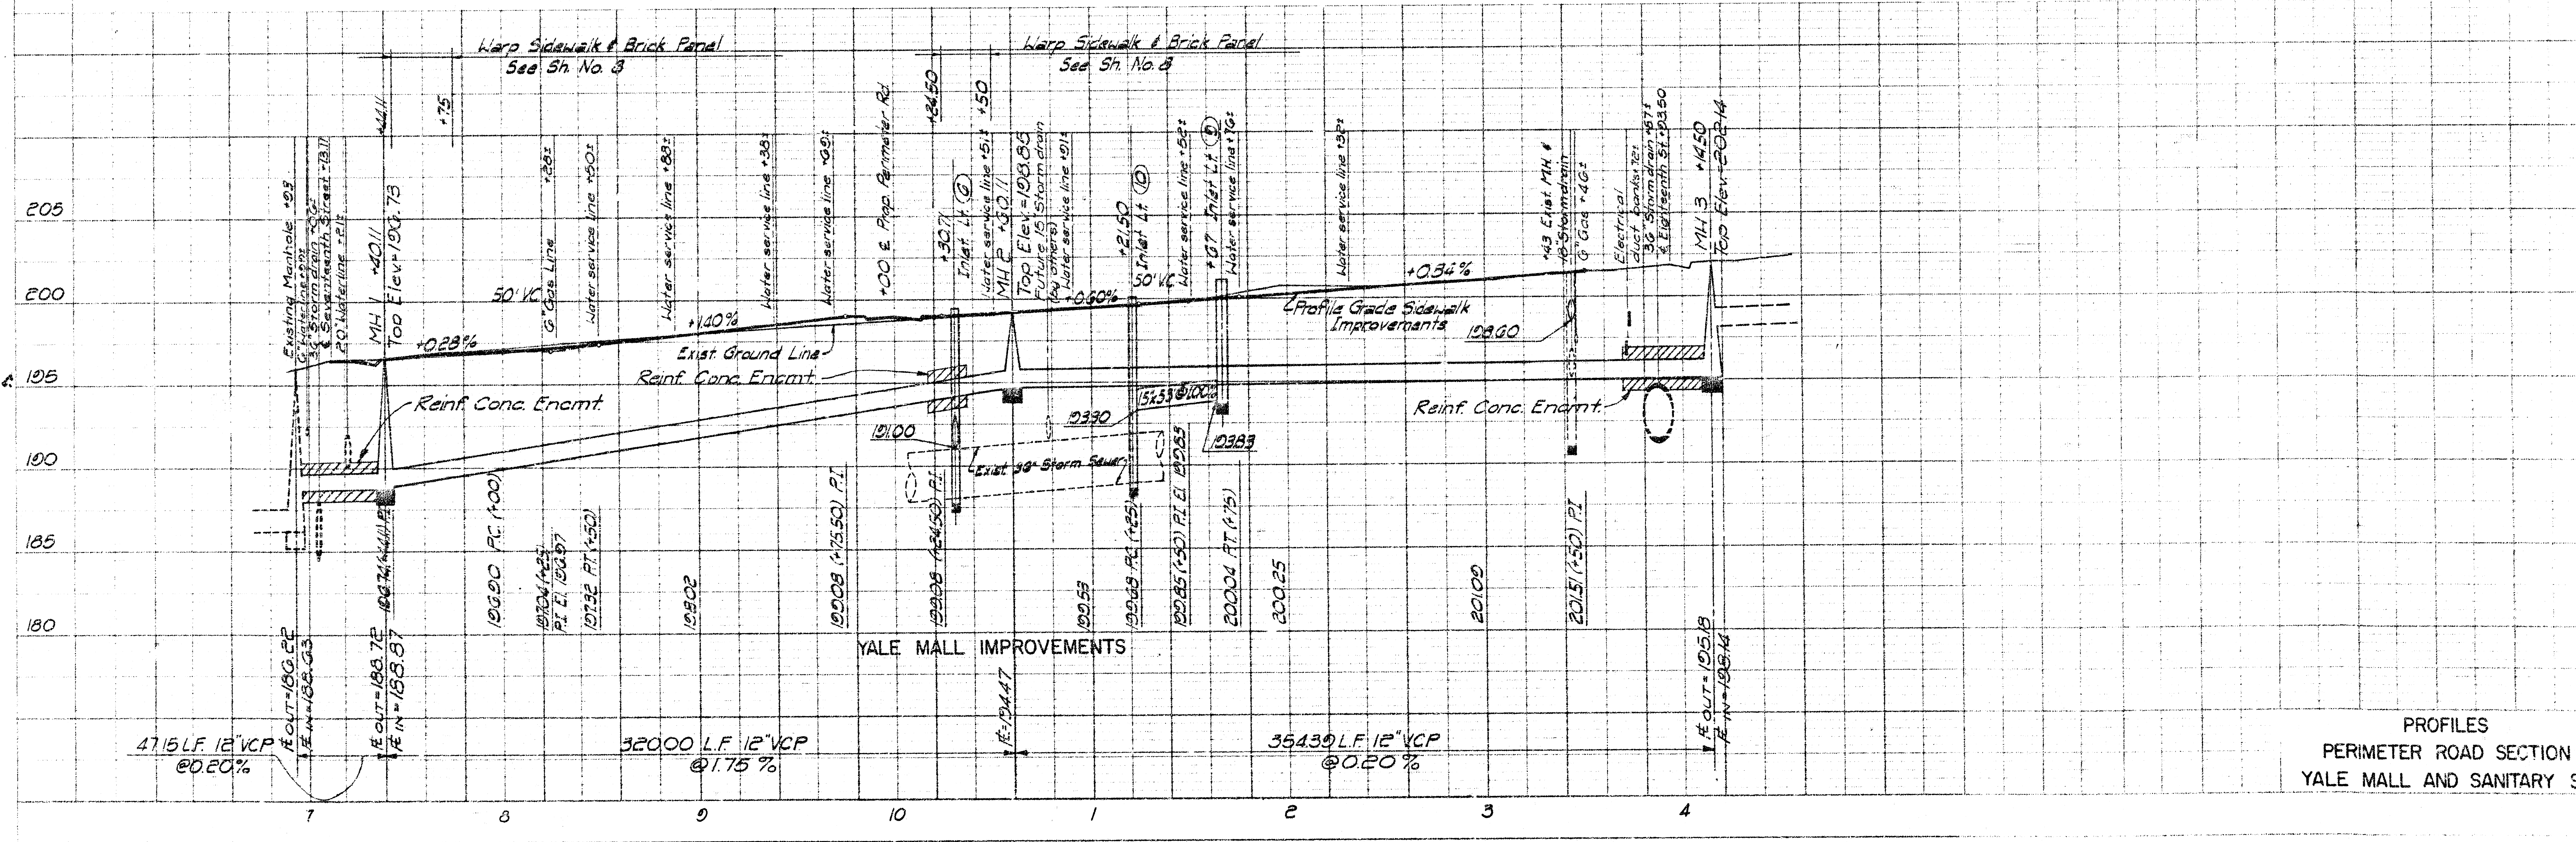

PROFILES
PERIMETER ROAD SECTION 2
YALE MALL AND SANITARY SEW

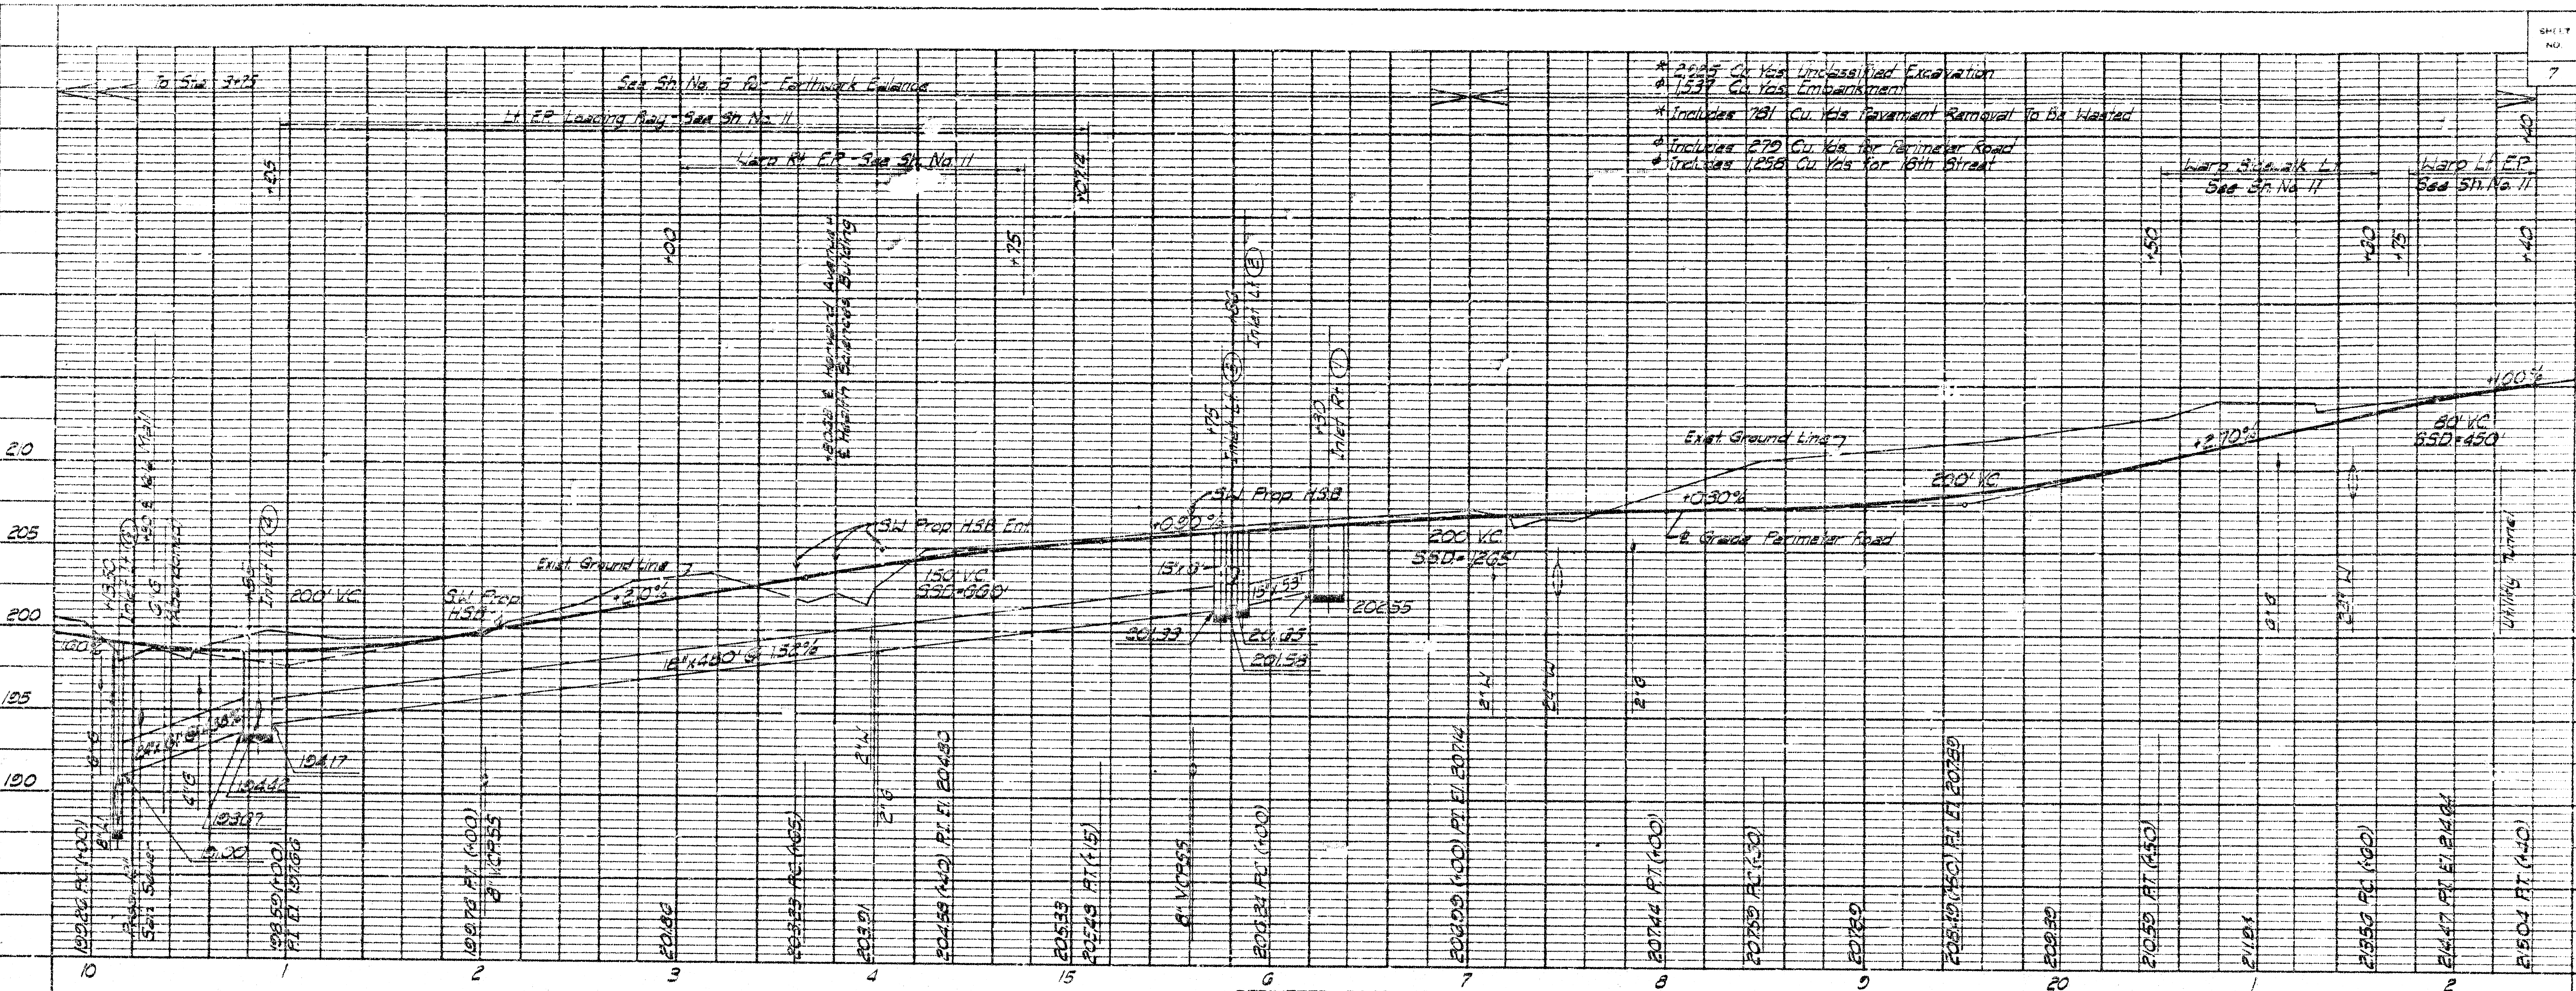

- * 2645 Cu Yds Unclassified Excavation
- * 1537 Cu Yds Embankment
- * Includes 181 Cu Yds Pavement Removal To Be Hauled
- * Includes 270 Cu Yds for Perimeter Road
- * Includes 1255 Cu Yds for 18th Street

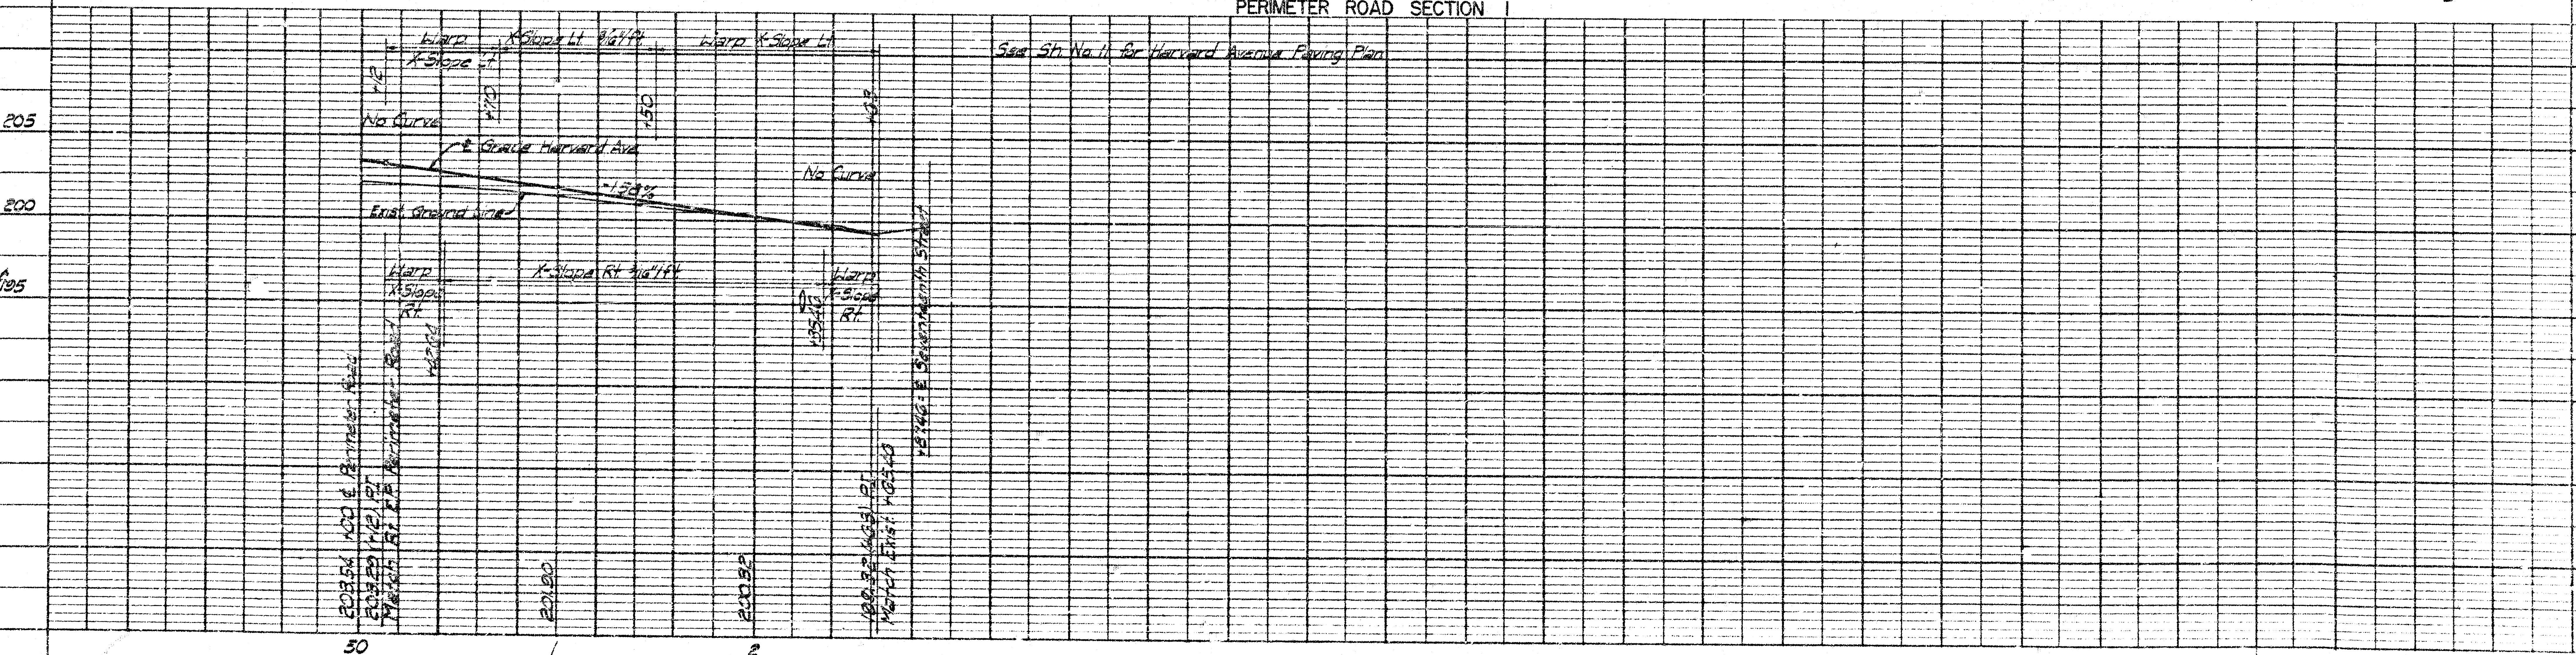

PROFILES
PERIMETER ROAD SECTION I
HARVARD AVENUE