


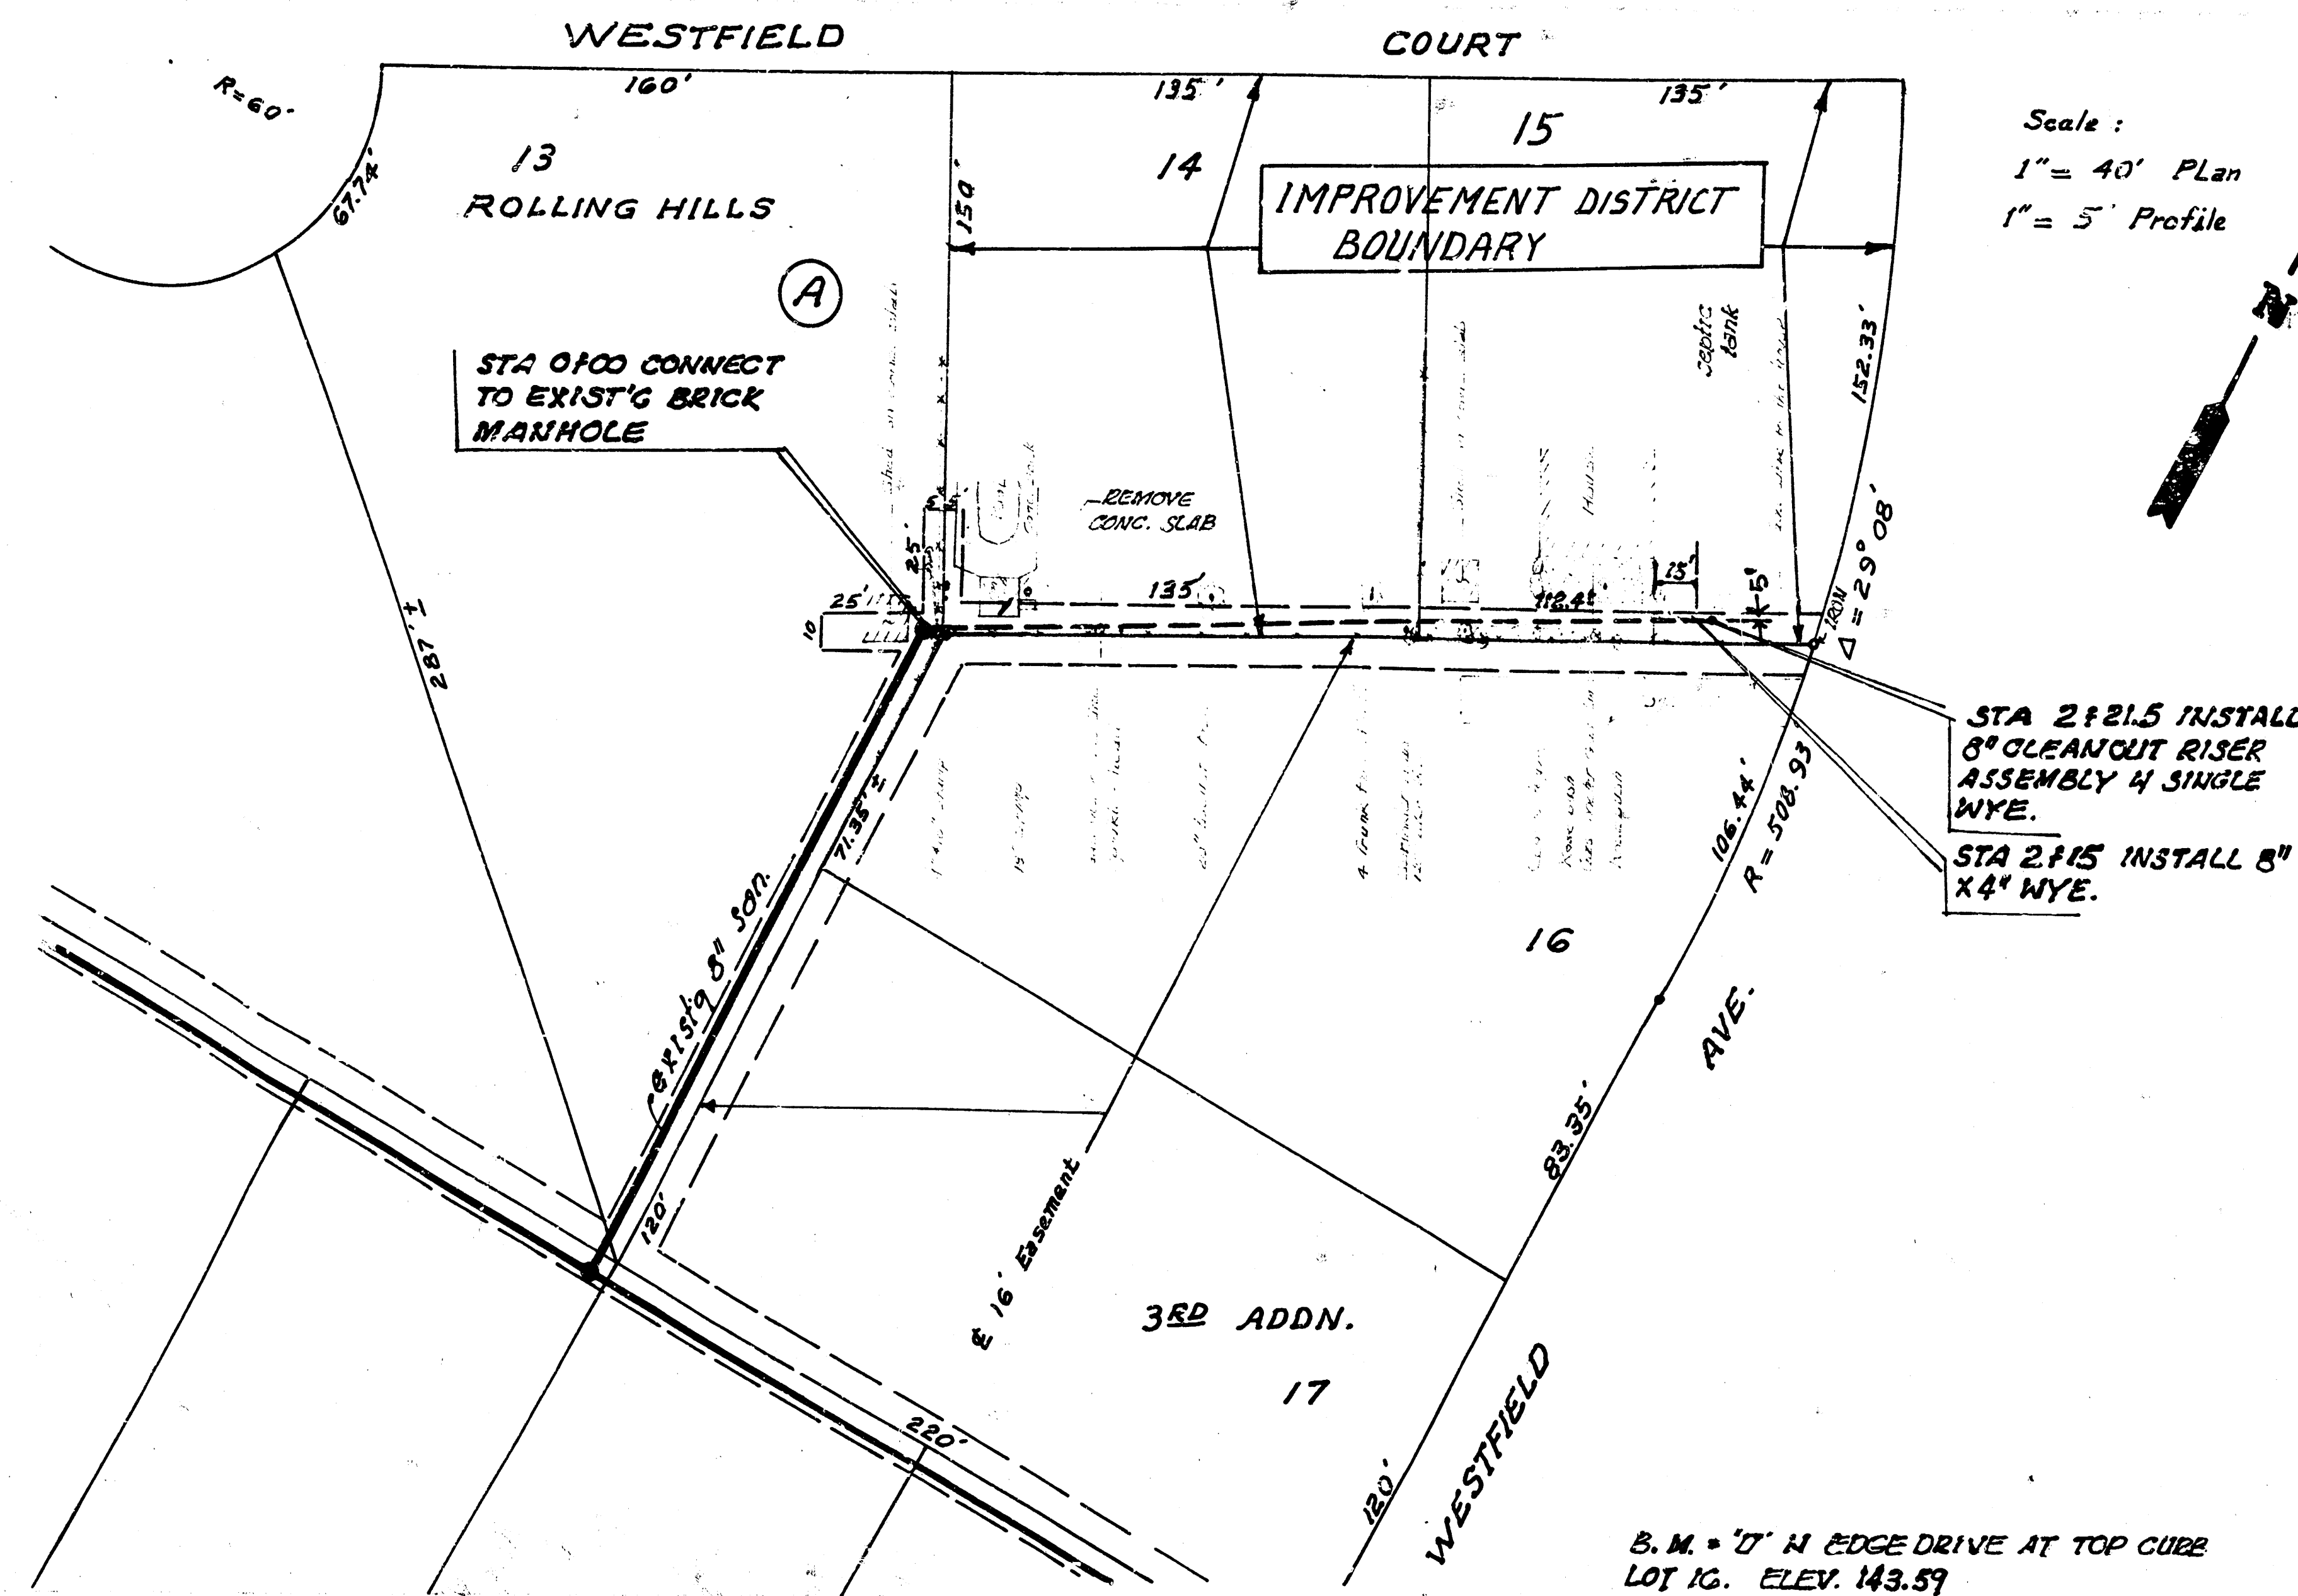


## LATERAL 98, WESTLINK SEWER


PROJECT NO. 468-82143

INDEX NO. 740886


CITY OF WICHITA, KANSAS  
M. E. LINDEBAK - CITY ENGINEER

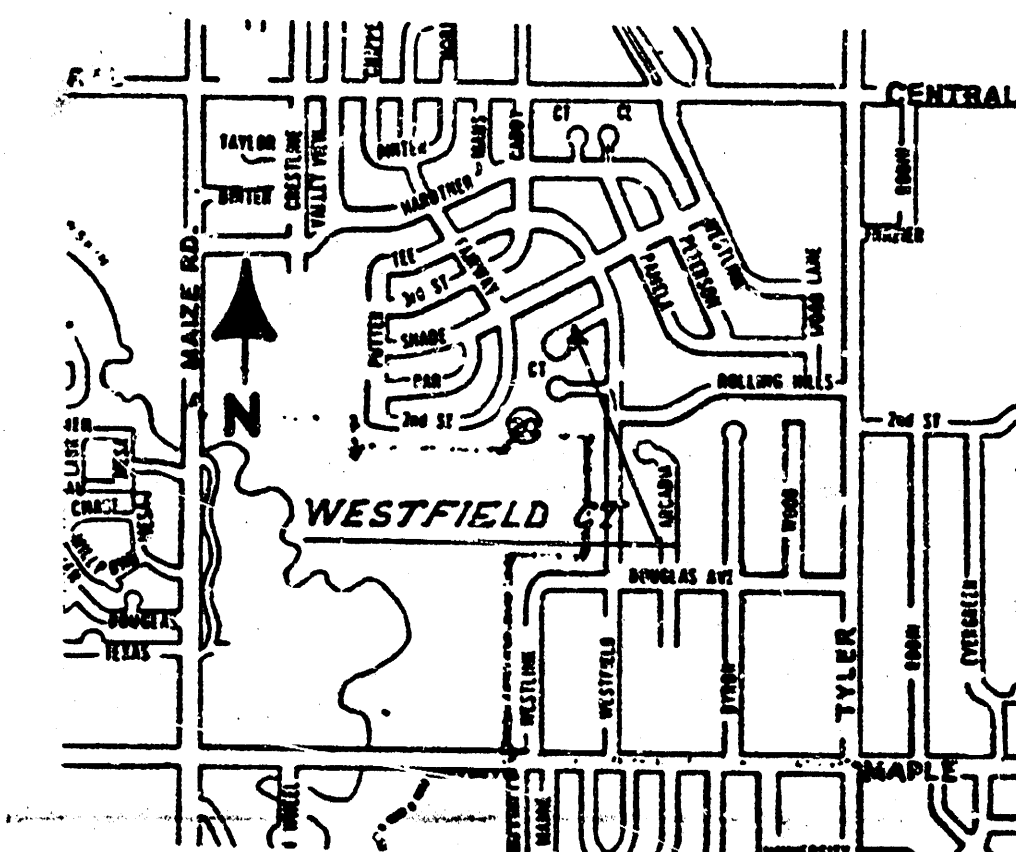

LOCATION MAP

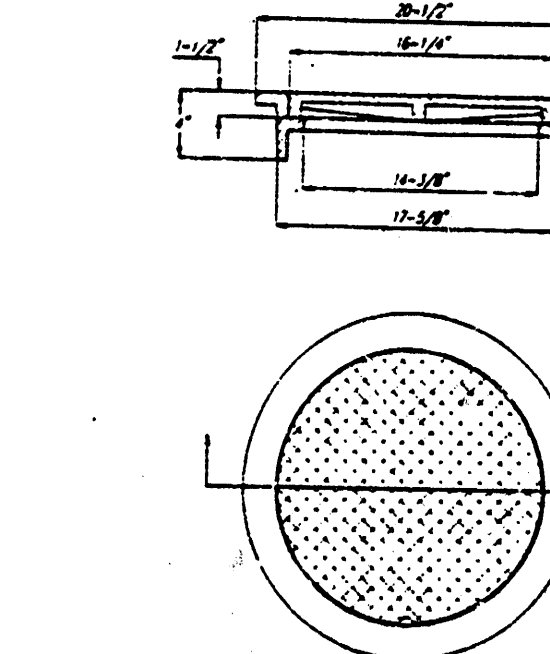

DEETER #1977 RING and SOLID COVER

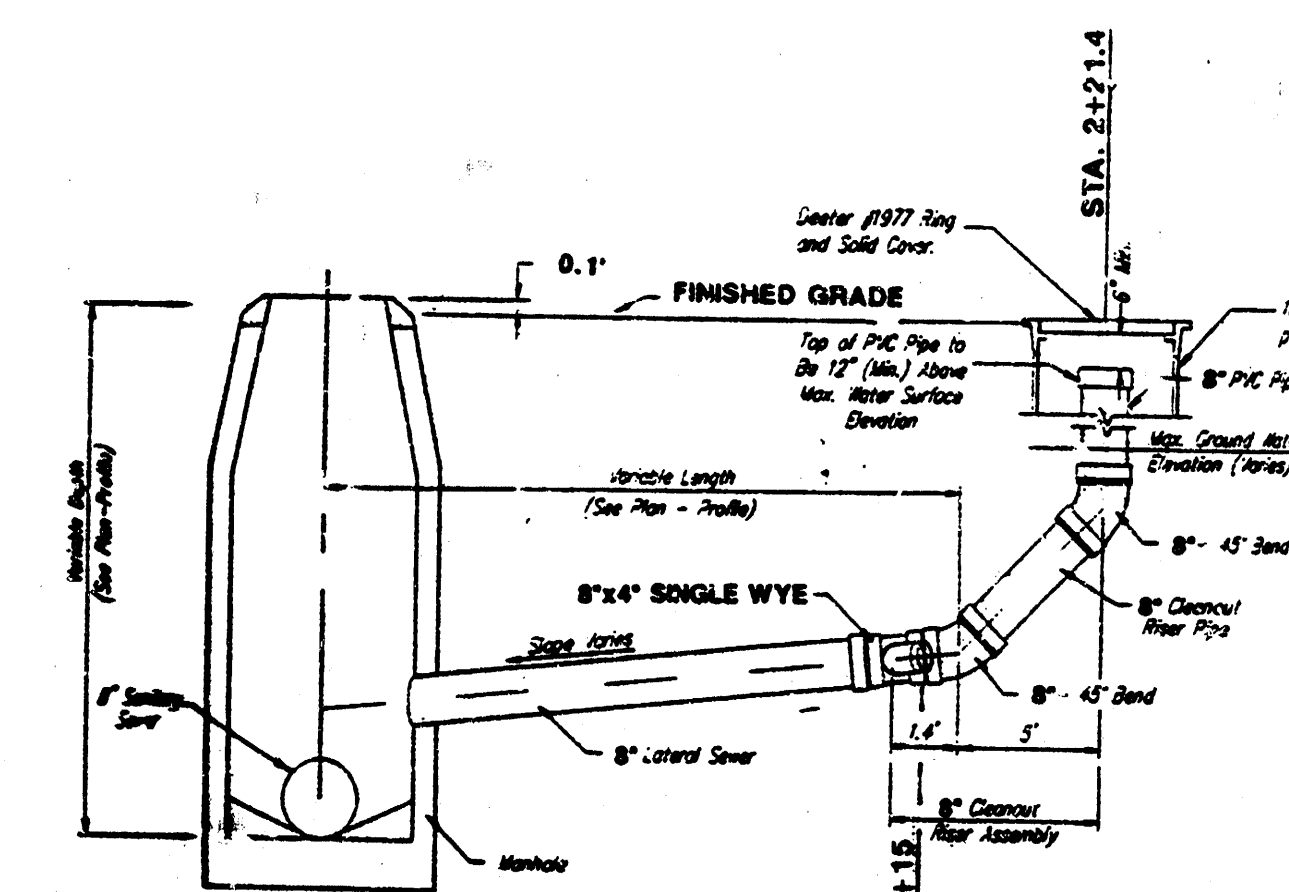

8" CLEANOUT RISER ASSEMBLY DETAIL

### GENERAL NOTES

- The contractor shall coordinate with each individual property owner within the sanitary sewer improvement district to determine proposed wye branch location.
- The contractor shall record the locations and flow line elevations of all wye branches that he installs. Such records shall be provided to the City of Wichita upon completion of the project.
- The contractor shall be responsible for preserving property lines. The contractor will be required to re-establish any property lines which are damaged or destroyed by his construction operations. Such lines shall be re-established by a licensed land surveyor in accordance with state laws.
- Existing utilities and their location, as shown on the plans, represent the best information obtainable for design. The locations shown are not guaranteed. Additional existing utilities may also be encountered. The contractor will be required to work around existing utilities within the right-of-way which do not conflict with proposed construction.
- Trees and shrubs in public right-of-way which are in direct conflict with proposed new construction shall be removed by the contractor with the engineer's approval. Trees and shrubs which are not in direct conflict with proposed new construction shall be saved and protected from damage.
- Properties within the project limits may have underground sprinkler systems in public easement which conflict with new construction. Contractor will be required to remove such improvements should they not be removed by their owner at the time of construction of this project. The contractor will be required to salvage all sprinkler heads and/or valves and give such material to their owner. Portions of underground sprinkler systems not in conflict with new construction shall be protected from damage and shall remain in place. All work in connection with underground sprinkler systems shall be considered as subsidiary to the contract pay items of work.
- Rubble from the removal of miscellaneous structures and access excavations which is to be meted shall be disposed of as sites to be provided by the contractor. These sites shall be approved by the Engineer as to suitability, appearance and site location. Location shall be the option of the Engineer. All disposal sites must be approved by the Kansas Department of Health and Environment. Material either stockpiled or disposed of in a flood plain shall require a Kansas State Board of Agriculture permit. Any material dumped in waters of the United States or wetlands is subject to U.S. Corps of Engineers permitting regulations. Any material buried or stockpiled beyond approved construction limits would require additional archaeological investigations unless buried in a previously approved borrow location.
- Contractor will be required to provide a minimum advance notice of forty-eight (48) hours to utility companies prior to starting any excavation as follows:  
Kansas One Call 887-2470  
Southwestern Bell Telephone Company 1-316-571-2811  
Cablevision 282-4270 or 283-2061  
KPL Gas Service 283-7311  
Kansas Gas & Electric 284-1141  
City of Wichita Water Department 755-6008  
Public Gas Company 942-8330 or 283-8141
- The contractor is solely responsible to notify and to make any necessary arrangements with utility companies for any needed adjustments of utility facilities prior to start of work.
- Contractor will be required to excavate existing building owners as required by Engineer to verify the depth of proposed sewer code.



Booked 2-21-92 JKB