B.M. 112.88 E. Rim M.H. 8' N. & 1.3' W. of N.W. cor. of Lot 1, Blk. 2, Wichita Builders Addn.

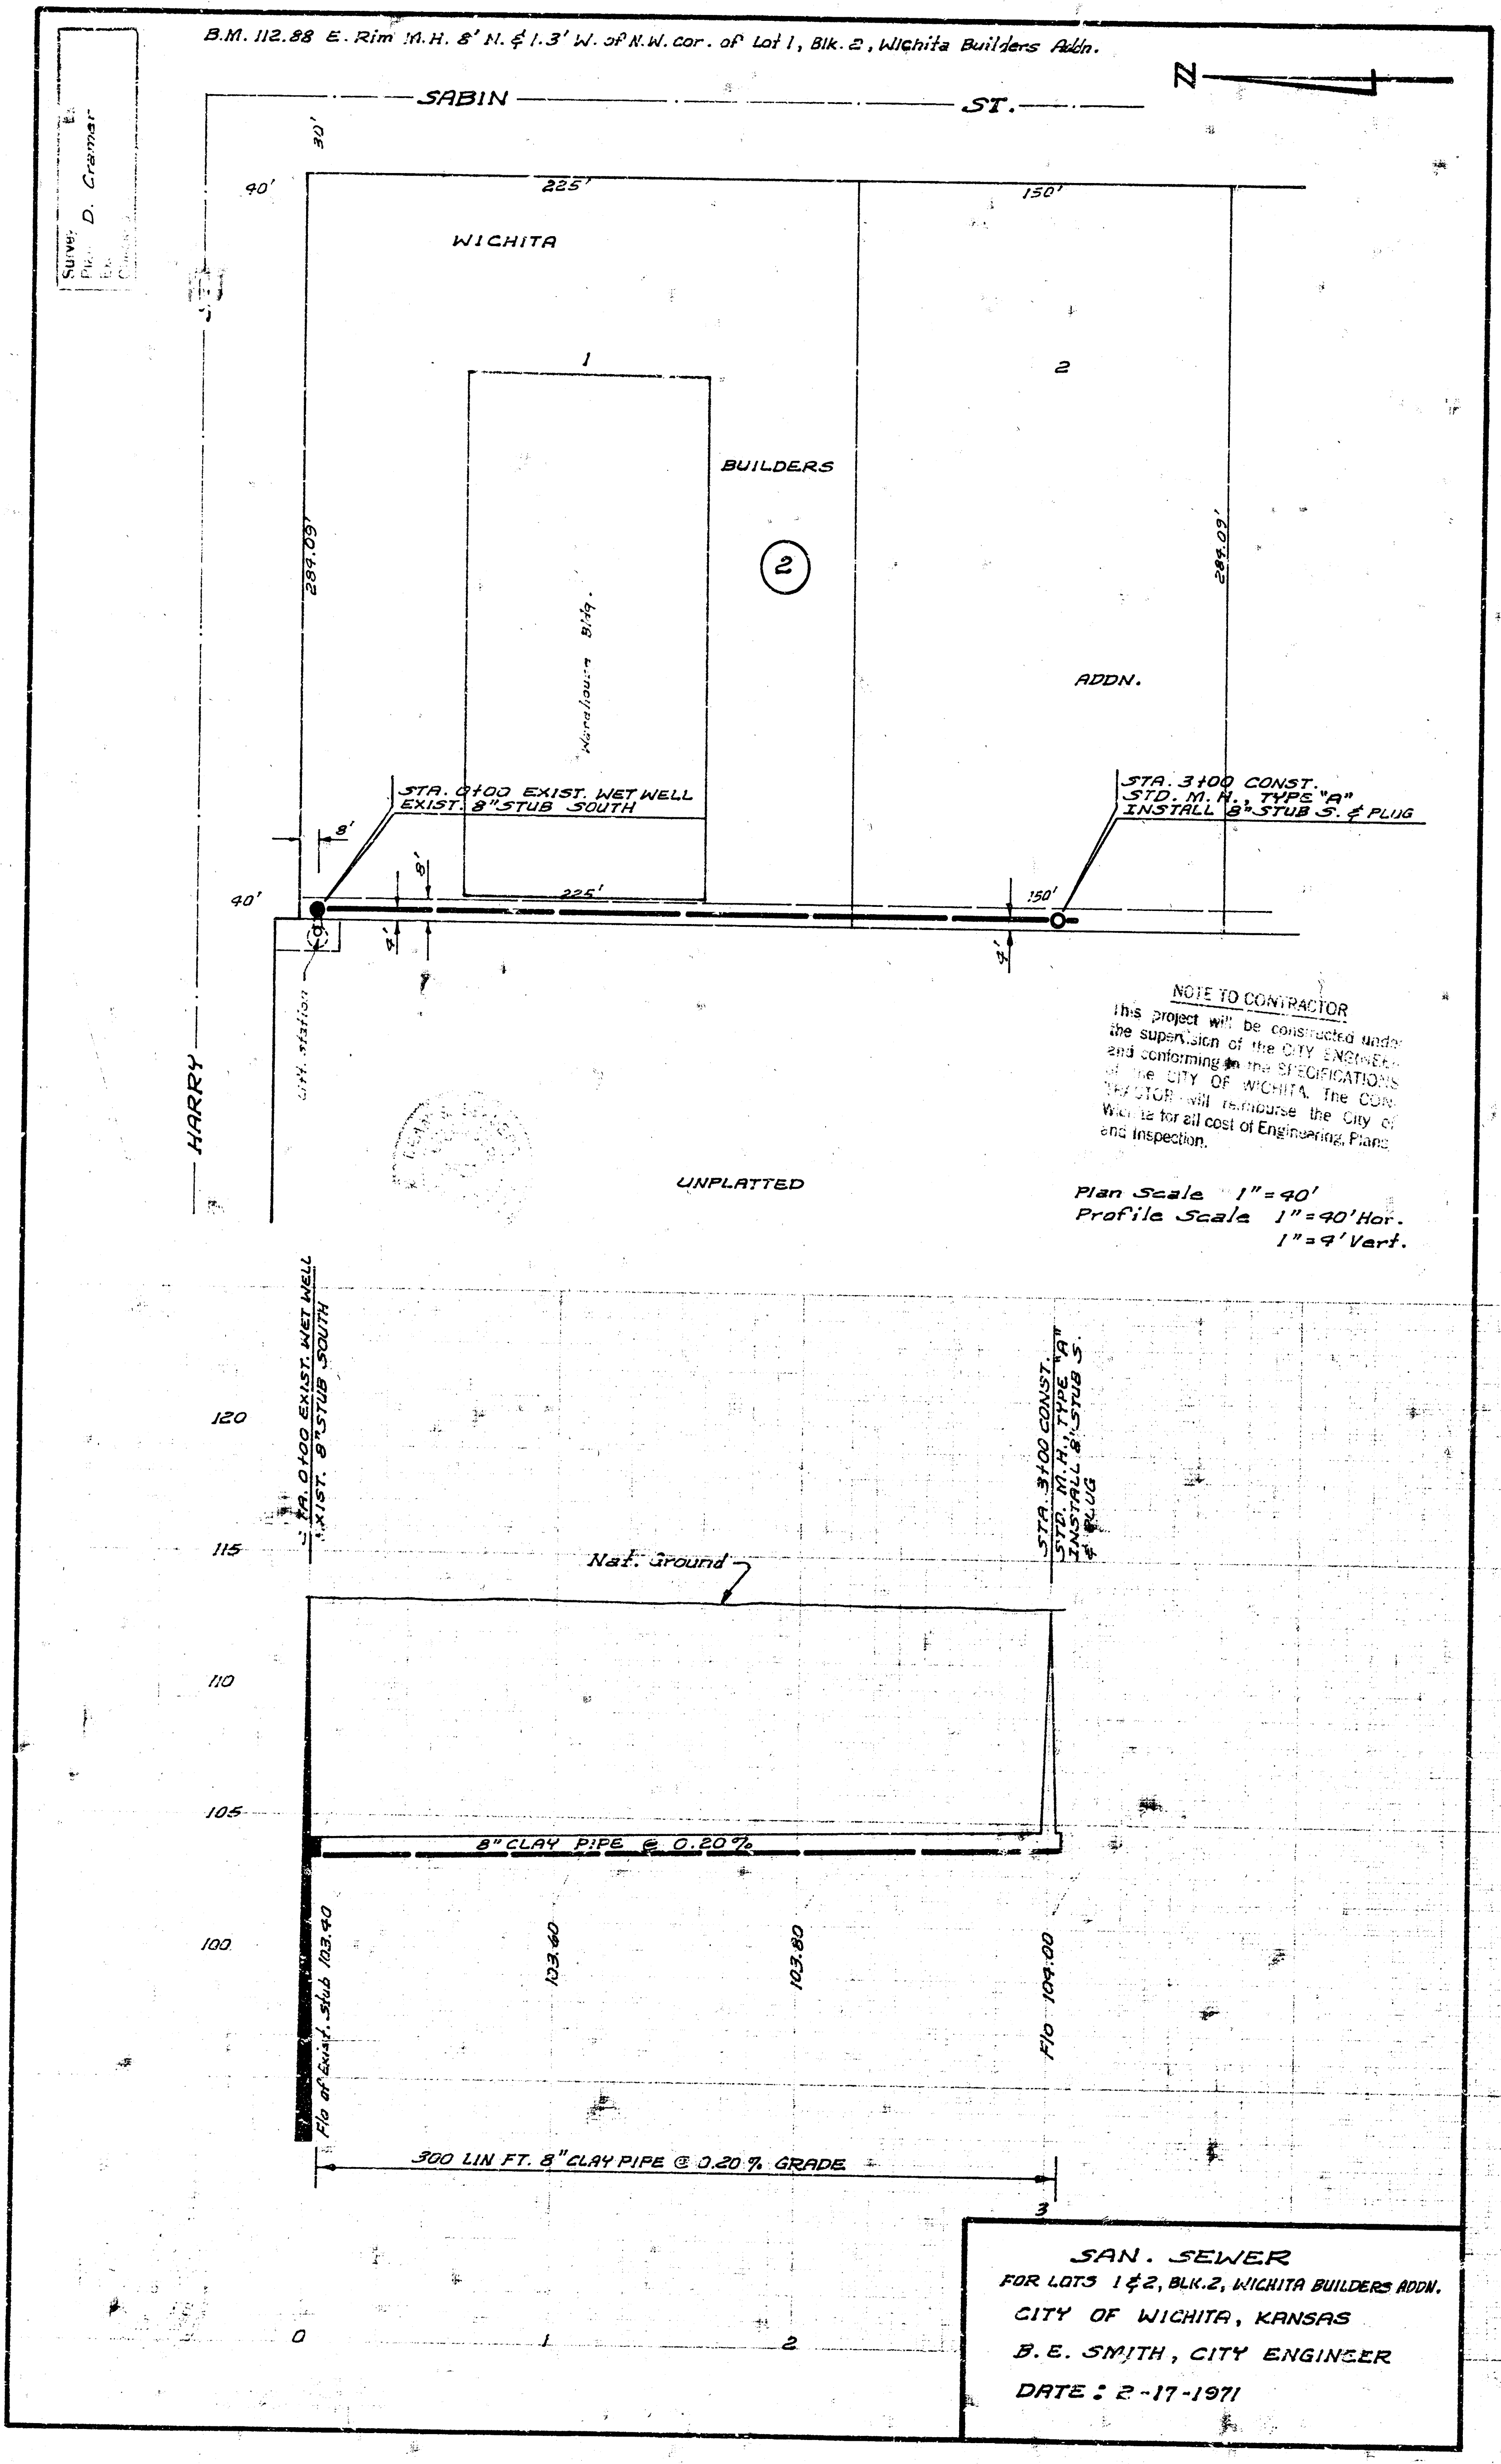
Survey
Plan D. Cramer
SABIN ST.
HARRY
N
30'
40'
225'
150'
WICHITA
BUILDERS
ADDN.
1
2
②
Warehouse Bldg.
289.09'
STA. 0+00 EXIST. WET WELL
EXIST. 8" STUB SOUTH
STA. 3+00 CONST.
STD. M.H., TYPE "A"
INSTALL 8" STUB S. & PLUG
8'
4'
225'
150'
Lift station
UNPLATTED
STA. 0+00 EXIST. WET WELL
EXIST. 8" STUB SOUTH
STA. 3+00 CONST.
STD. M.H., TYPE "A"
INSTALL 8" STUB S.
& PLUG
120
115
110
105
100
Nat. Ground
8" CLAY PIPE @ 0.20%
Flo of Exist. Stub 103.40
103.60
103.80
Flo 104.00
300 LIN. FT. 8" CLAY PIPE @ 0.20% GRADE
0
1
2
3

NOTE TO CONTRACTOR
This project will be constructed under the supervision of the CITY ENGINEER and conforming to the SPECIFICATIONS of the CITY OF WICHITA. The CONTRACTOR will reimburse the City of Wichita for all cost of Engineering, Plans and Inspection.

Plan Scale 1" = 40'
Profile Scale 1" = 40' Hor.
1" = 4' Vert.

SAN. SEWER
FOR LOTS 1 & 2, BLK. 2, WICHITA BUILDERS ADDN.
CITY OF WICHITA, KANSAS
B.E. SMITH, CITY ENGINEER
DATE: 2-17-1971

B.M. 138.82 So. Rim M.H. 100' W. of Sta. 0+00 on W.I.S.
B.M. 144.58 Std. 32± N. & 67± W. of ¢ of Rock Road & Lincoln

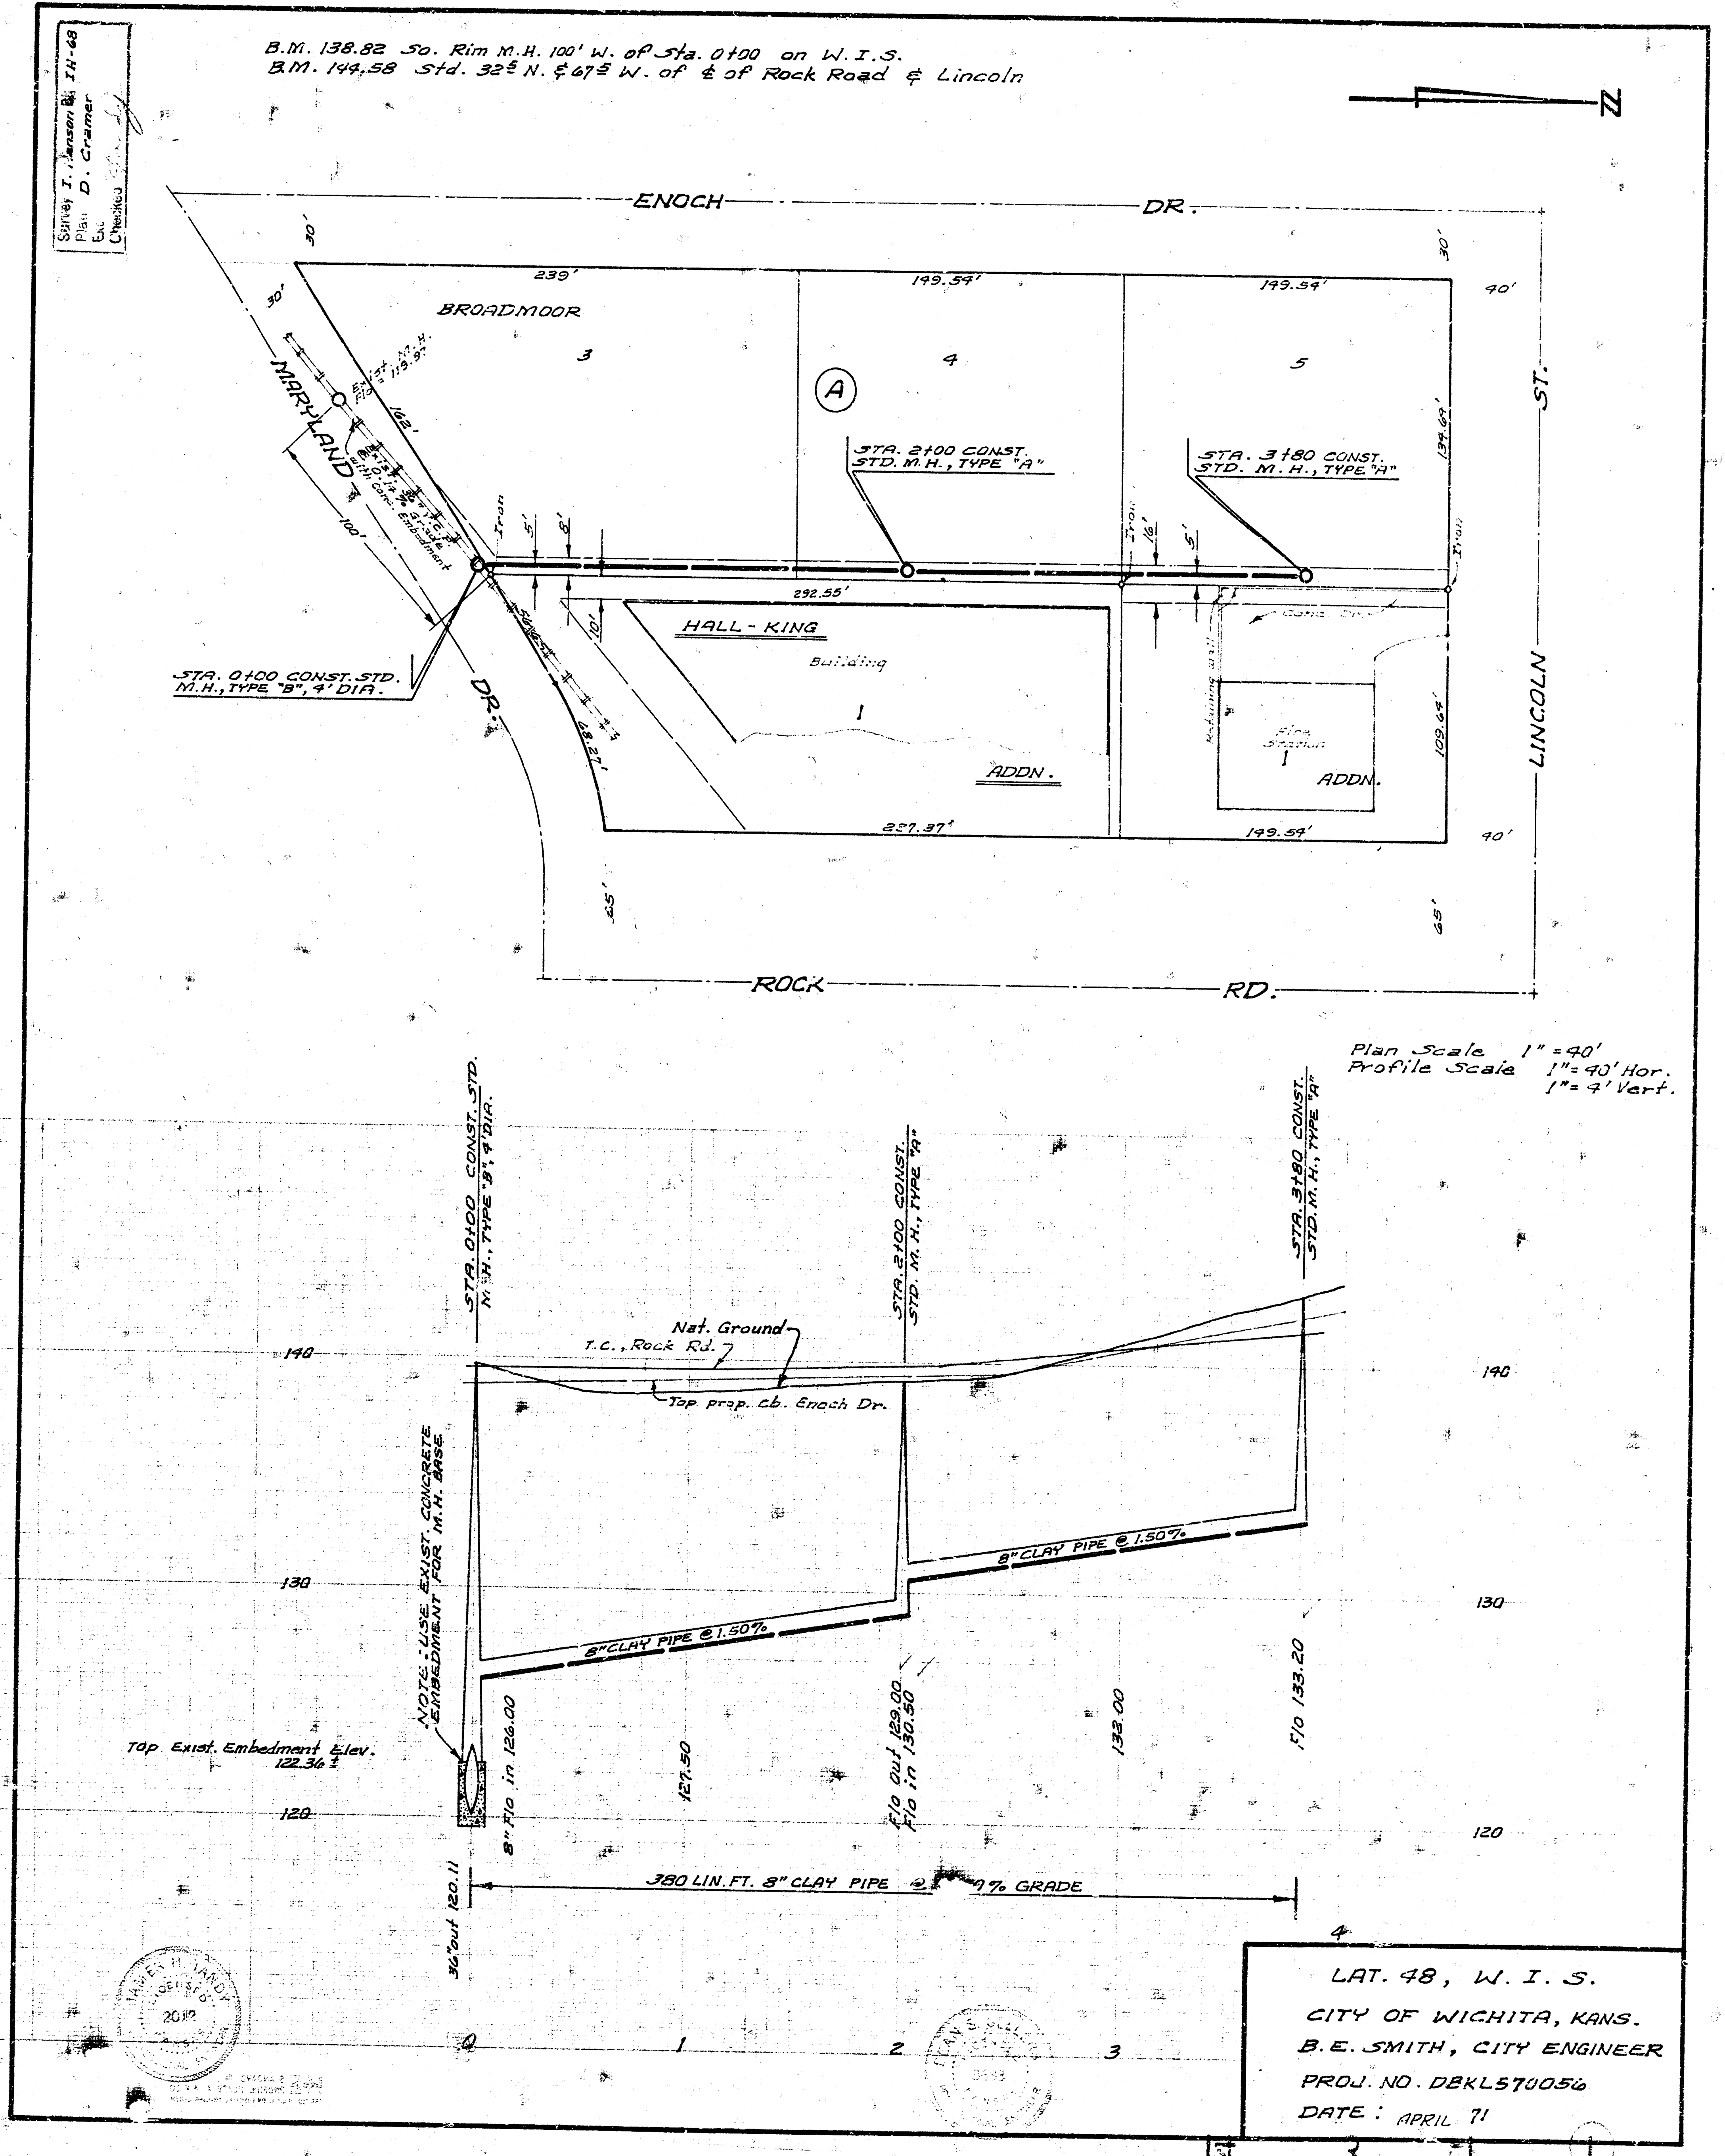
Survey I. Hanson Bk. IH-68
Plan D. Cramer
Ex.
Checked
N
ENOCH DR.
MARYLAND DR.
LINCOLN ST.
ROCK RD.
30'
30'
40'
40'
65'
65'
239'
149.54'
149.54'
BROADMOOR
3
4
5
Ⓐ
Exist. M.H. Flo = 119.9±
162'
Exist. 36" R.C.P. @ 0.14% Grade with Conc. Embedment
100'
56.5'
68.27'
Iron
5'
8'
10'
16'
5'
STA. 2+00 CONST.
STD. M.H., TYPE "A"
STA. 3+80 CONST.
STD. M.H., TYPE "A"
134.69'
292.55'
STA. 0+00 CONST. STD.
M.H., TYPE "B", 4' DIA.
HALL-KING
Building
1
ADDN.
Conc. Dr.
Retaining wall
Fire Station
1
ADDN.
109.64'
237.37'
149.54'
STA. 0+00 CONST. STD.
M.H., TYPE "B", 4' DIA.
STA. 2+00 CONST.
STD. M.H., TYPE "A"
STA. 3+80 CONST.
STD. M.H., TYPE "A"
140
130
120
Nat. Ground
T.C., Rock Rd.
Top prop. cb. Enoch Dr.
NOTE: USE EXIST. CONCRETE EMBEDMENT FOR M.H. BASE
8" CLAY PIPE @ 1.50%
8" CLAY PIPE @ 1.50%
Top Exist. Embedment Elev. 122.36±
36" out 120.11
8" Flo in 126.00
127.50
Flo out 129.00
Flo in 130.50
132.00
Flo 133.20
380 LIN. FT. 8" CLAY PIPE @ [illegible]% GRADE
0
1
2
3
4

Plan Scale 1" = 40'
Profile Scale 1" = 40' Hor.
1" = 4' Vert.

LAT. 48, W.I.S.
CITY OF WICHITA, KANS.
B.E. SMITH, CITY ENGINEER
PROJ. NO. DBKL570056
DATE: APRIL 71

14 3 1 ①