


B.M. 125.72 S.E. Corner Conc. Porch House No. 2401 Hood.

Plan Scale 1" = 10'
Profile Scale 1" = 10' Hor.
1" = 4' Vert.

- General Notes:**
- #1. Contractor to devise own method for handling sewage, subject to the approval of the engineer, while installing new sewage lift station facilities. All costs incurred by the contractor for handling the sewage will not be paid for directly and are to be included in the bid price for the lift station.
 - #2. All external electrical wiring to conform with the lift station manufacturer's requirements, the National Electrical Code requirements and the local code requirements of the City of Wichita.
 - #3. All waste material to be disposed of by the contractor as approved by the engineer. Existing pump and motor to be transported to the City of Wichita materials storage yard. These items of work to be considered as incidental to the construction of the lift station.
 - #4. All backfill to be either sand fill or flushed, if excavated material is suitable for flushing. The top one foot of backfill in areas not covered by pavement to be replaced with compacted topsoil.
 - #5. The bid item Sq. Yds. Pavement Removed and Replaced is to be considered as payment for removing and replacing both concrete and asphalt pavement, including such items as separate curb, separate gutters, integral curb, combined curb and gutter, and saw joint.
 - #6. The cast of all 4" cast iron elbows and concrete thrust blocking shall be included in the bid price for Lin. Ft. 4" Cast Iron Pipe.
 - #7. The concrete pad shall be cured for seven days before placing lift station.
 - #8. A 6" x 6" sock mix 3,000 P.S.I. concrete walk is to be constructed around lift station entrance tube and out to the south line of 23rd Street No. See walk detail on sheet No. 2. Walk will not be paid for directly and the cost is to be included in the bid price for the lift station.
 - #9. Contractor to either relocate exist. service pole, if in usable condition, or furnish new service pole and this work are to be considered as incidental to construction of lift station.

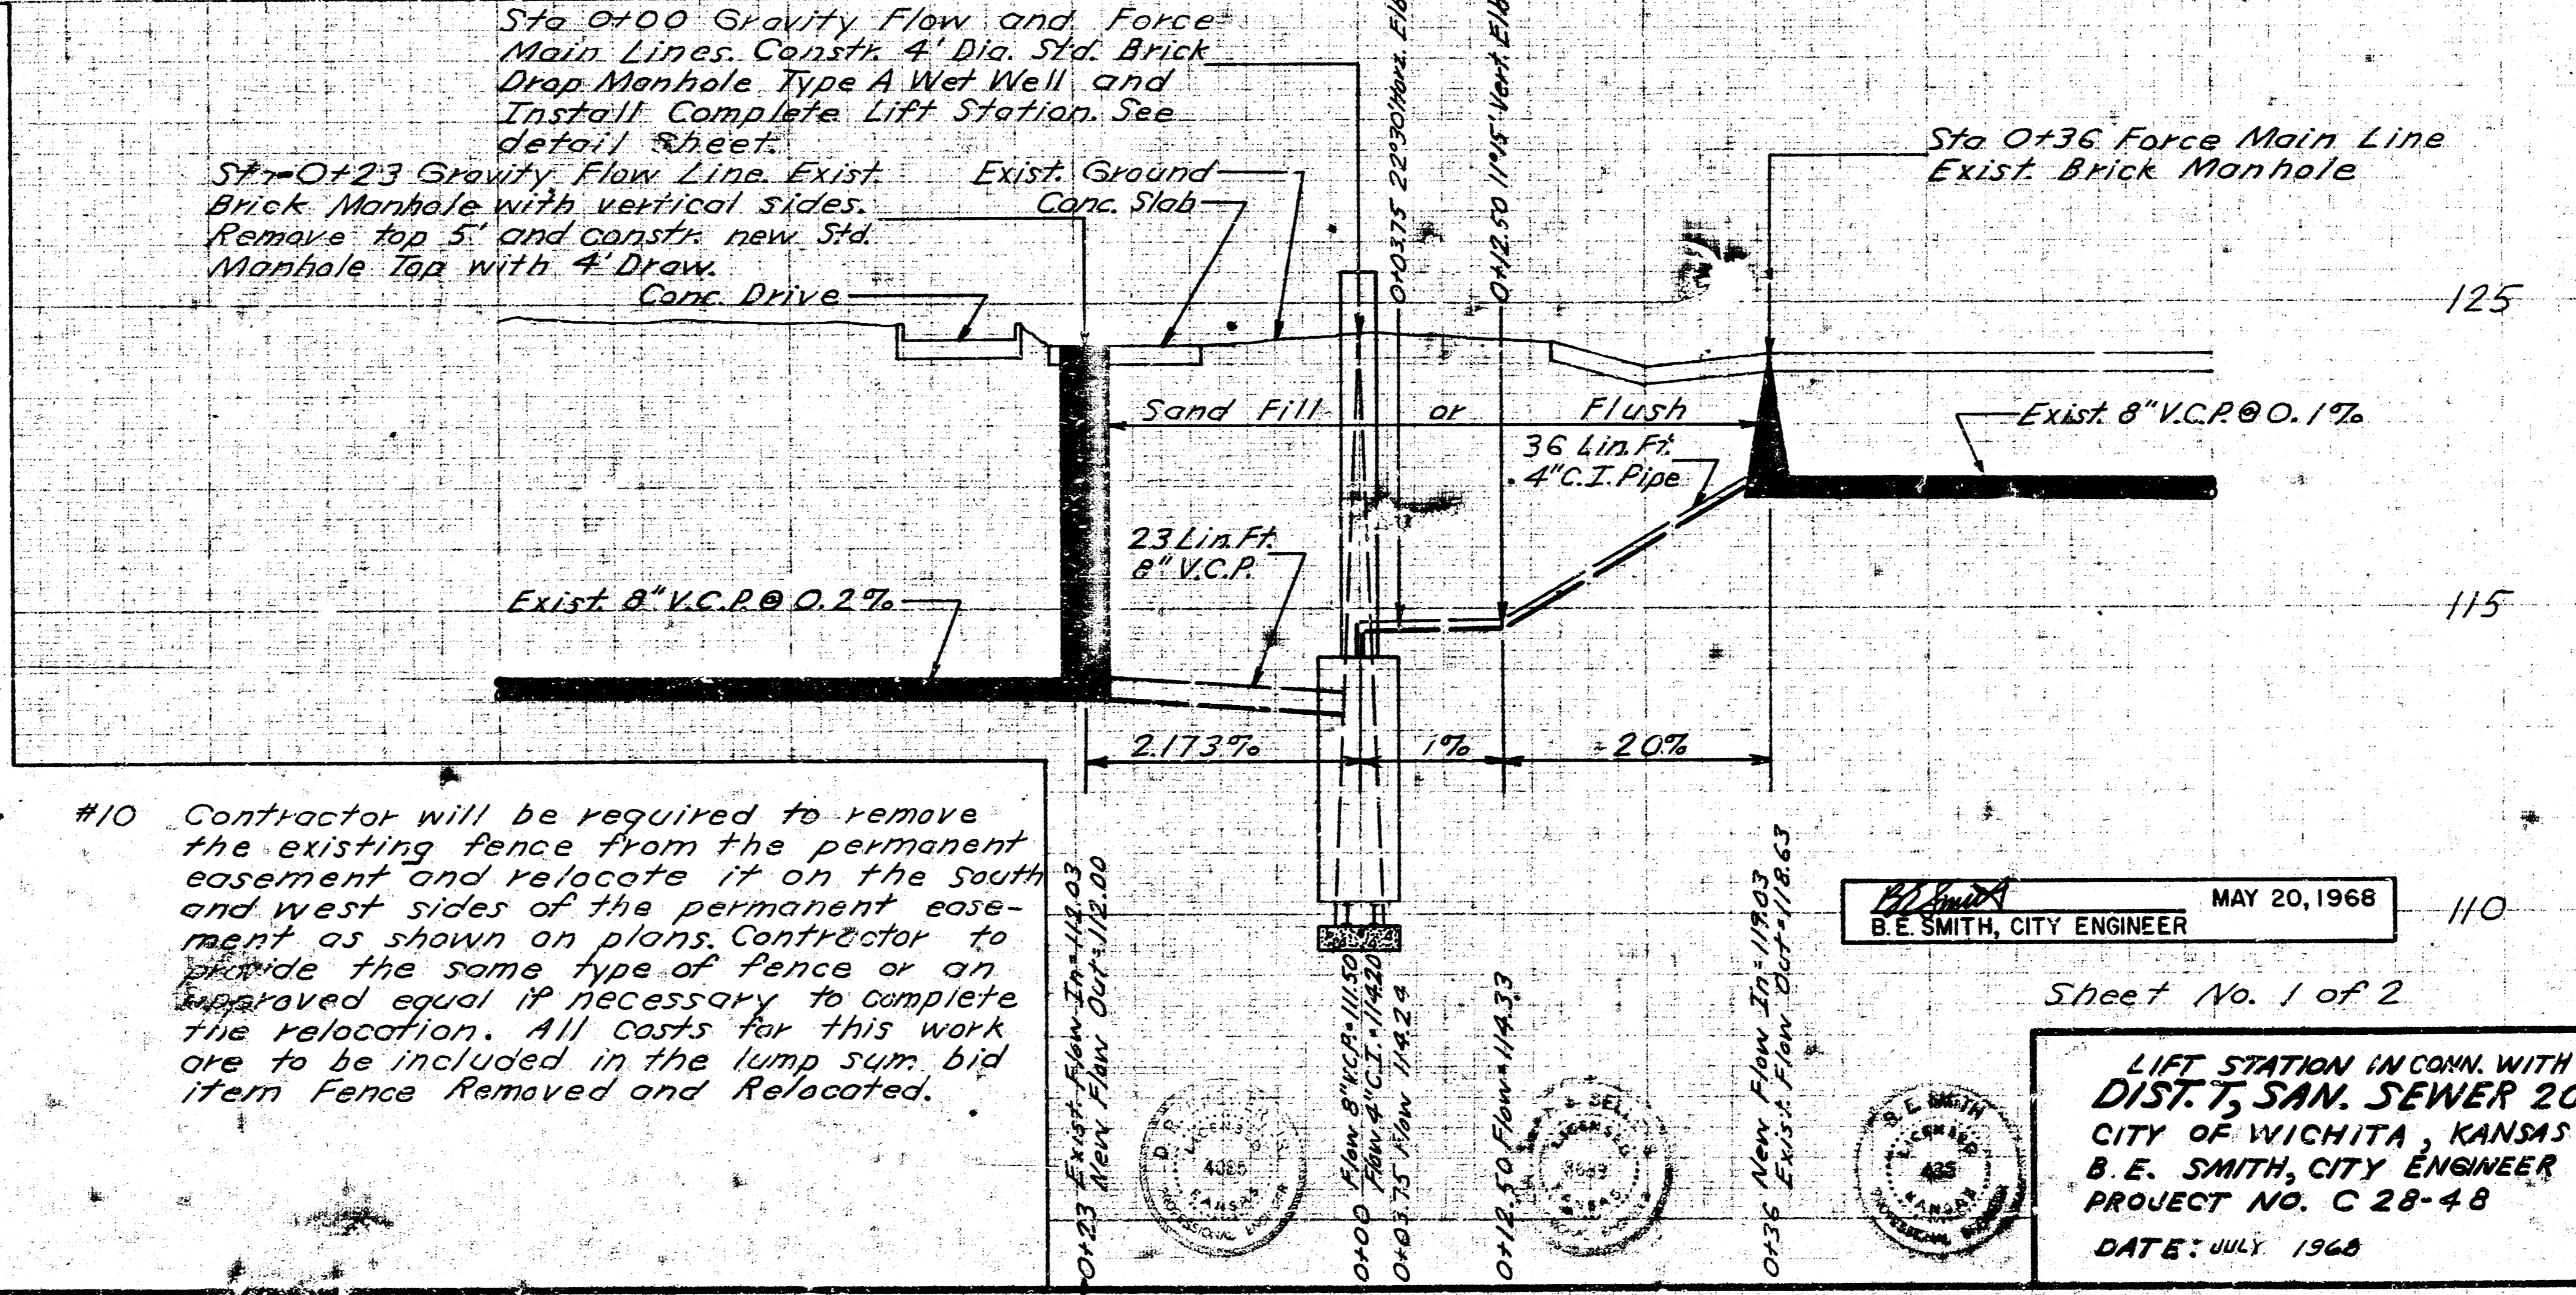

#10 Contractor will be required to remove the existing fence from the permanent easement and relocate it on the south and west sides of the permanent easement as shown on plans. Contractor to provide the same type of fence or an approved equal if necessary to complete the relocation. All costs for this work are to be included in the lump sum bid item Fence Removed and Relocated.

MAY 20, 1968
B.E. SMITH, CITY ENGINEER

Sheet No. 1 of 2

LIFT STATION IN CONN. WITH
DIST. 7, SAN. SEWER 20
CITY OF WICHITA, KANSAS
B.E. SMITH, CITY ENGINEER
PROJECT NO. C 28-48
DATE: JULY 1968

