


ORIGINAL	SURVEYED	BY	DATE
SURVEY	PLOTTED		
NOTE BOOK	EXPLAIN		

Approximate Quantities	
Std. M.H.	4 ea.
8" P.V.C.	581 L.F.
4" P.V.C.	23 L.F.
Sidewalk Replacement	14 sq. ft.
Pavement Replacement (Play Area & Street)	71 sq. ft.
Flushed Sand Backfill	24 cu. yds.
Flush & Vibrate Transit	557 L.F.
Sub 200 & 5/57	

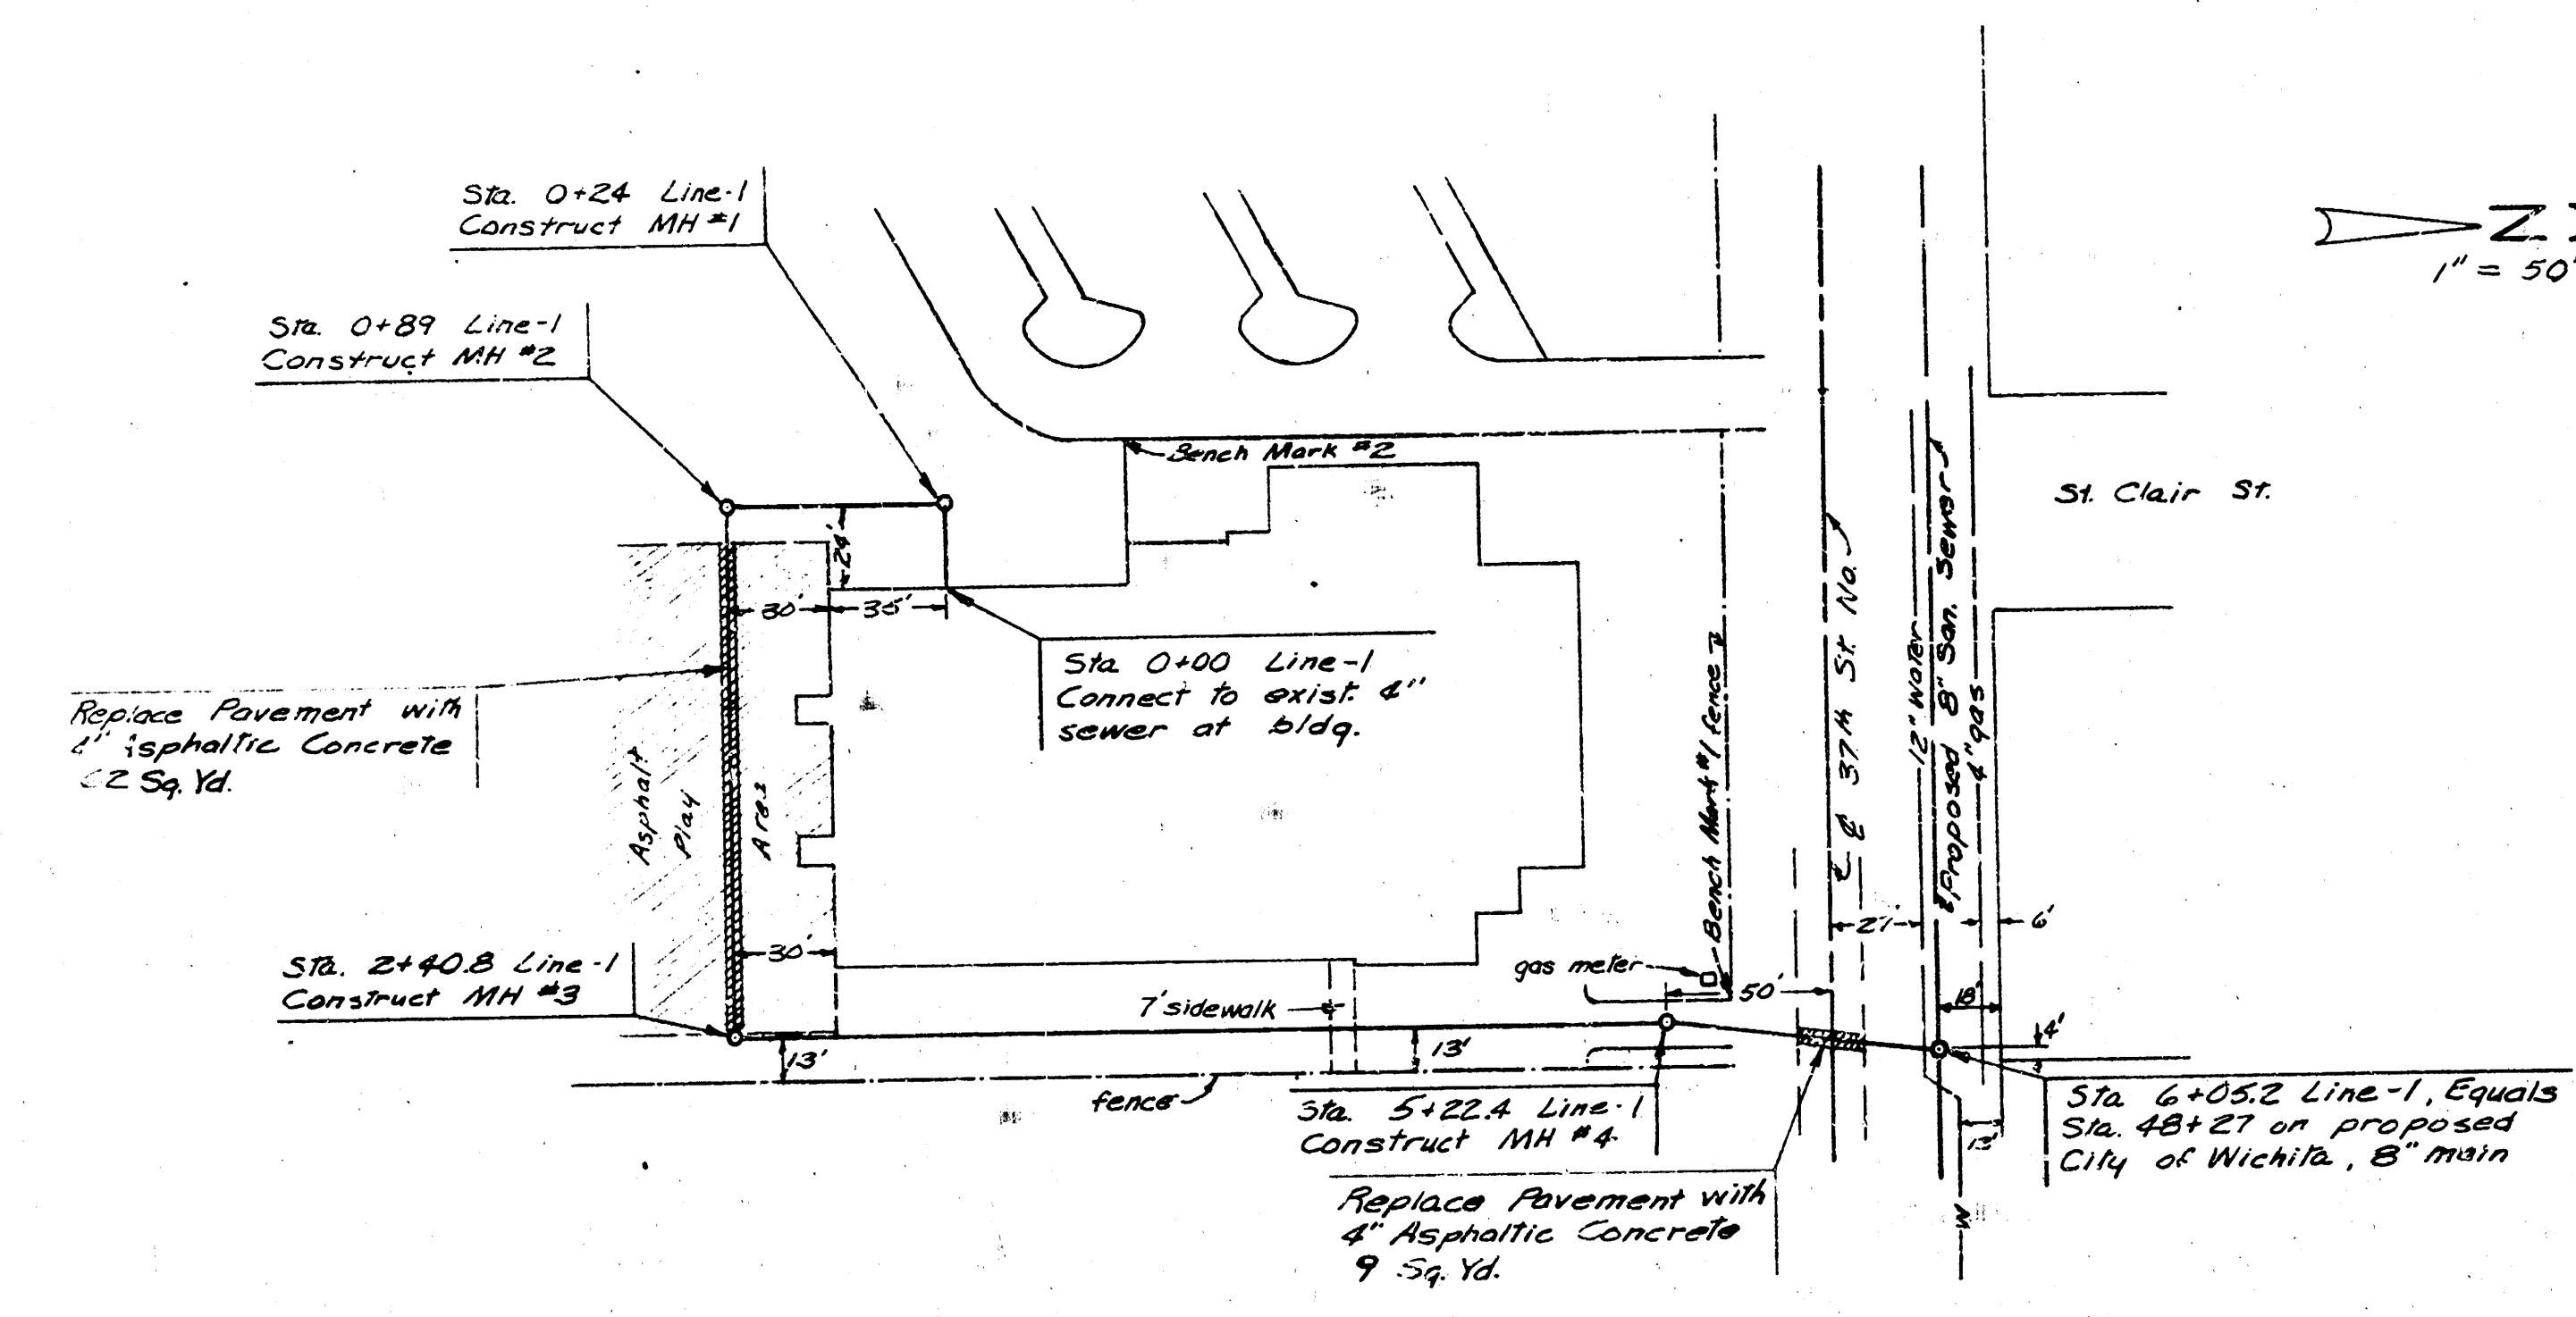

Note: Irons set at M.H. Locations

CITY OF WICHITA

APPROVED: Approval does not relieve the
from any responsibility for
deviations from the contract
ments or for any deficiencies of
equipment, work, or materials.

Date: 6/14/66

Engineering Div. *D. S. Smith*


NOTE TO CONTRACTOR

This project will be constructed under the supervision of the CITY ENGINEER and conforming to the SPECIFICATIONS of the CITY OF WICHITA. The CONTRACTOR will reimburse the City of Wichita for all cost of Engineering, Plans, and Inspection.

B.M.#1: Chiseled "D" at N. end of W. curb
of School Service Entrance. Elev = 136.77

B.M.#2: Chiseled "D" on E. curb of parking lot at S. end of sidewalk. Elev. = 137.38

City, B.M. - R.R. Spike N. Side of power Pole, S. side 37th St. N.
 & 5' E. of & Amidon So. Elev. = 134.63

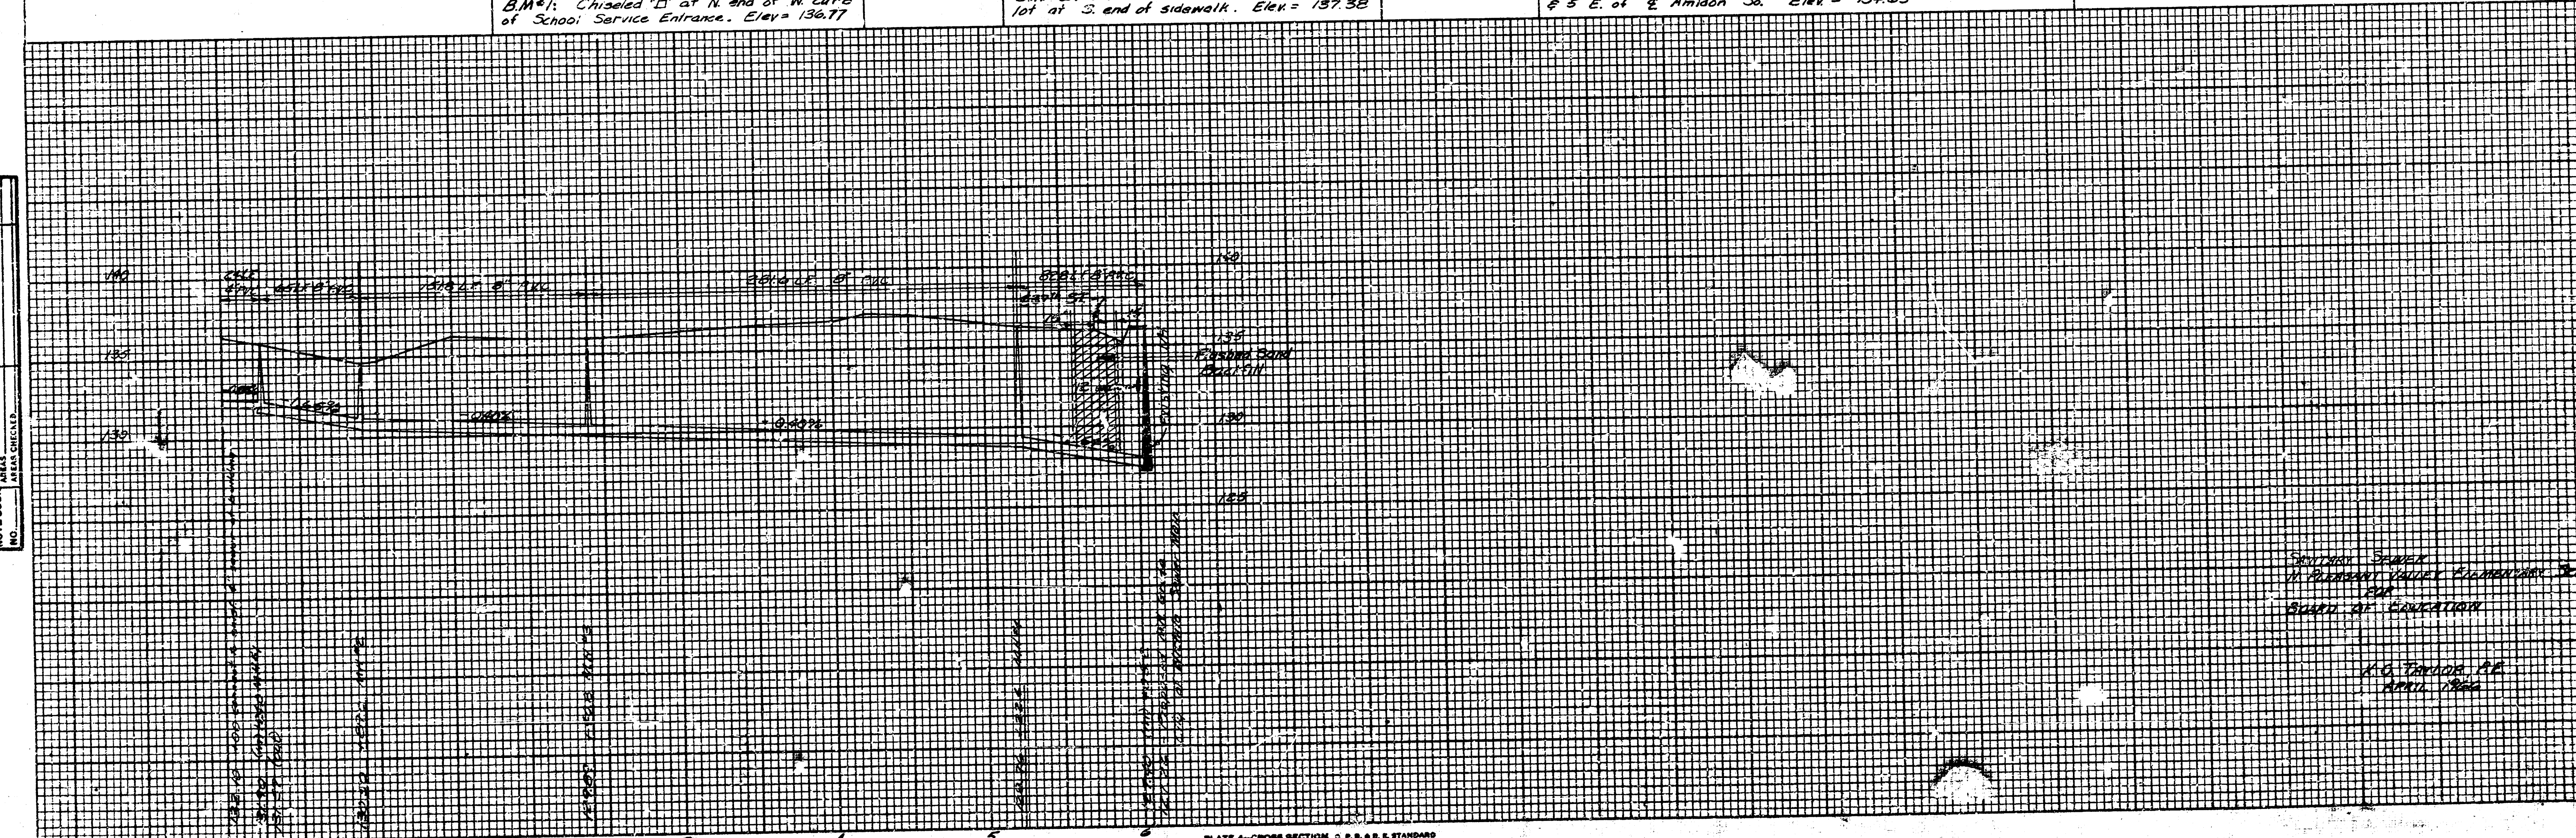

SCOTTISH JEWEL
11. PLAINFIELD VALLEY ELEMENTARY SCHOOL
FOR
BOARD OF EDUCATION

K. G. TAYLOR, P.E.
APRIL 1966

PLATE 4--CROSS SECTION Q. P. R. & R. E. STANDARD
THE FREDERICK POST CO., CHICAGO