
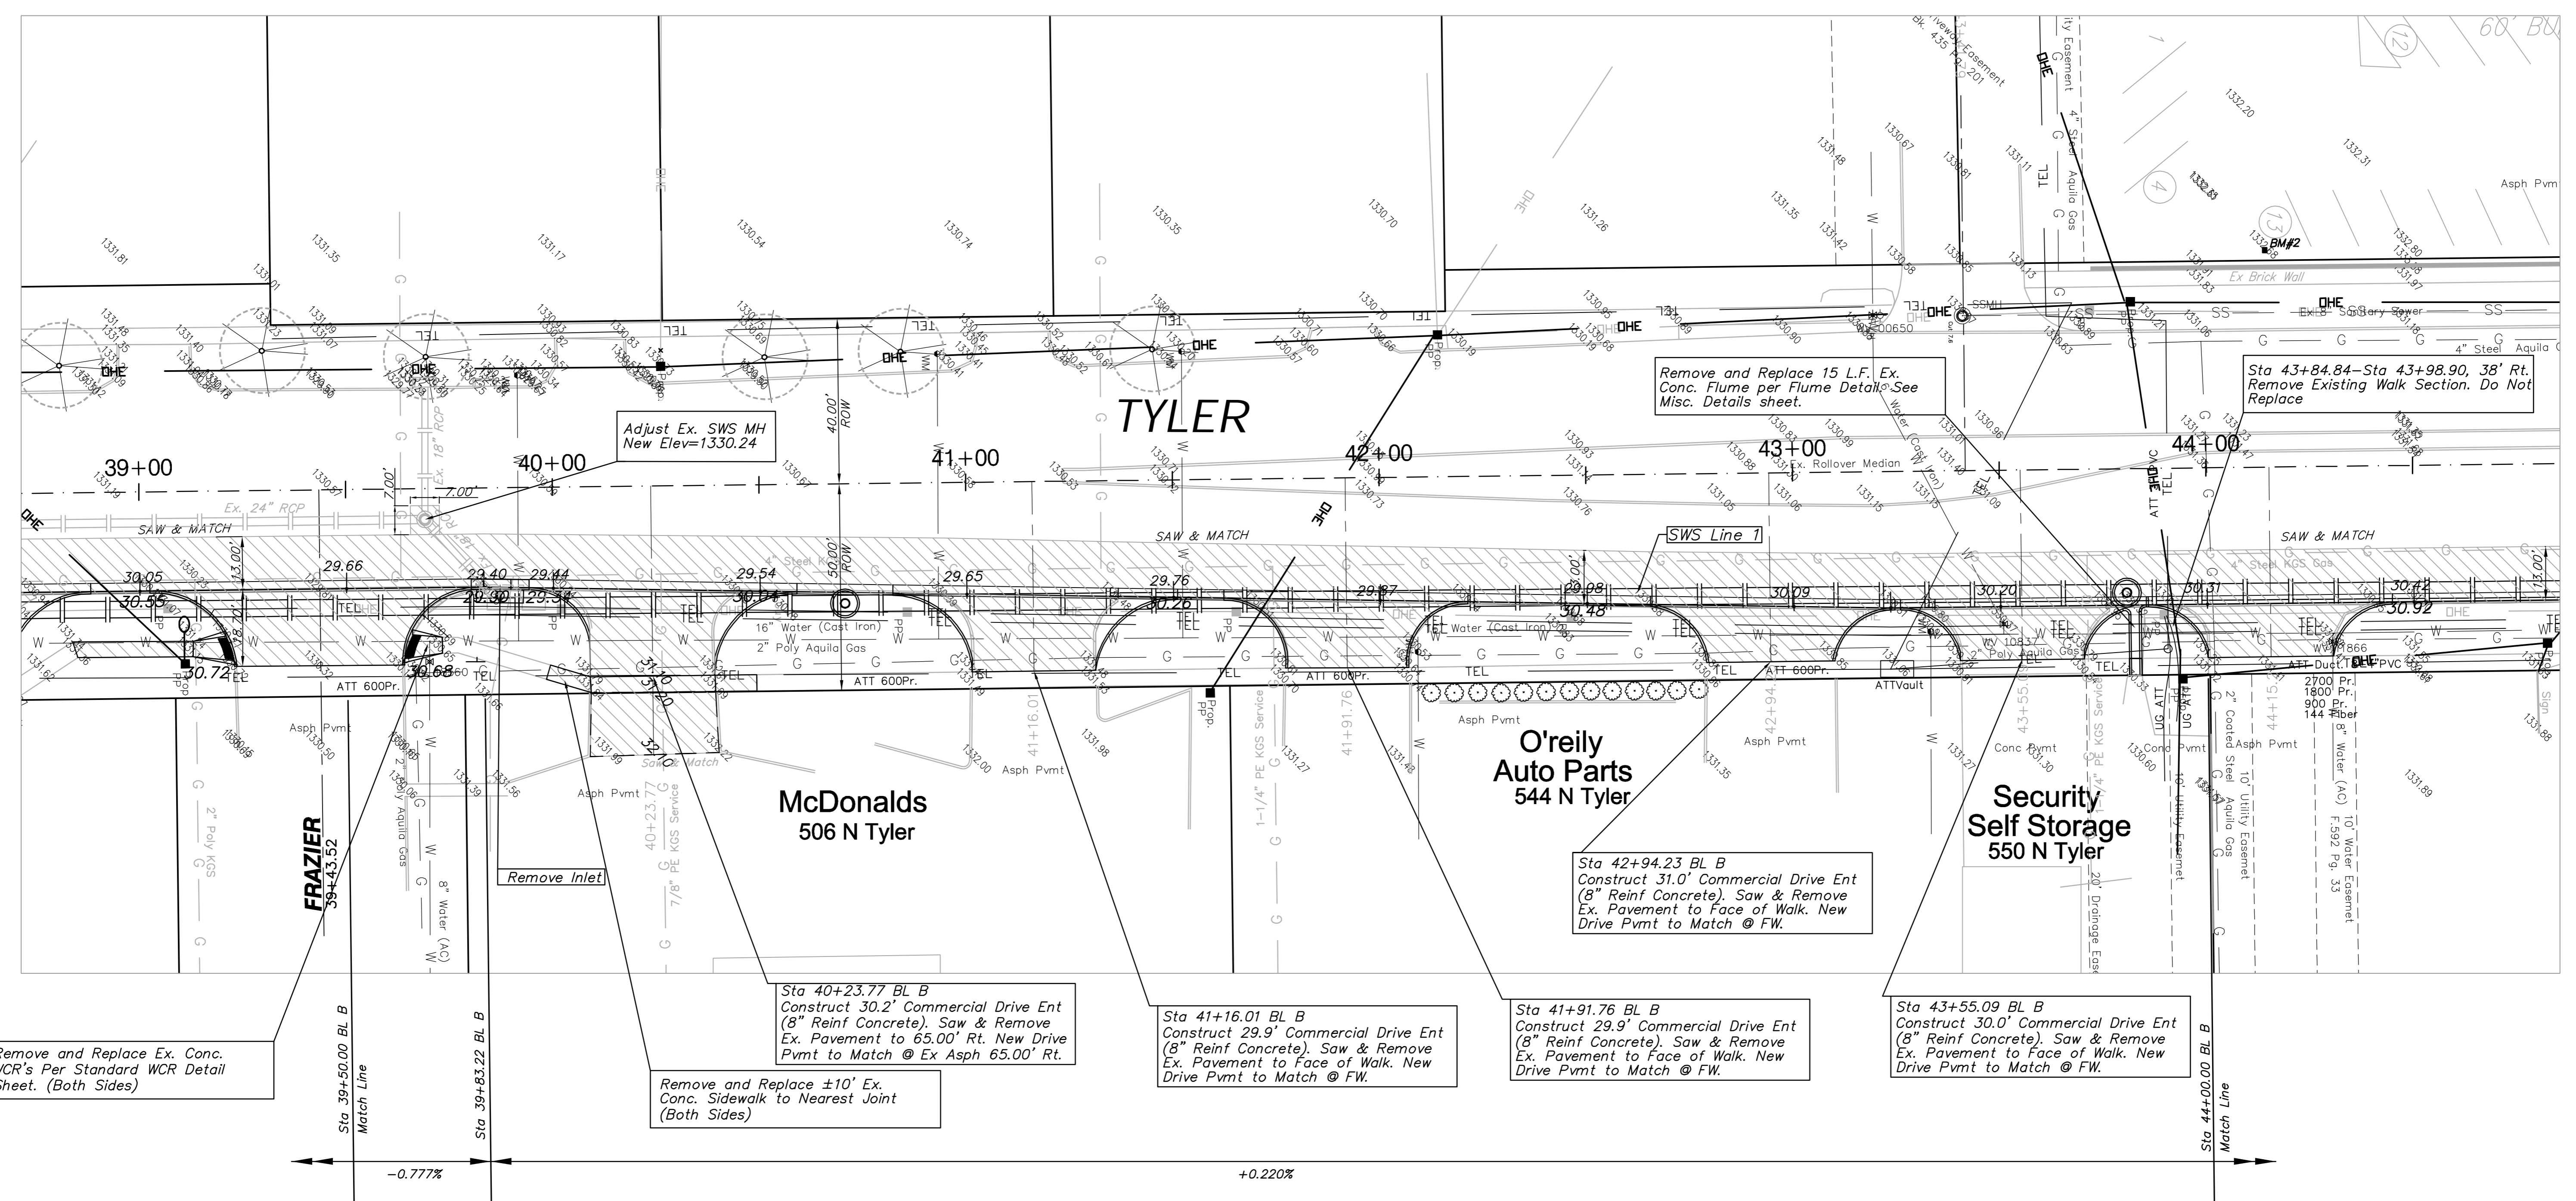


FHWA REGION NO.	STATE	PROJECT NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	87N-0378-01	2008	8	72

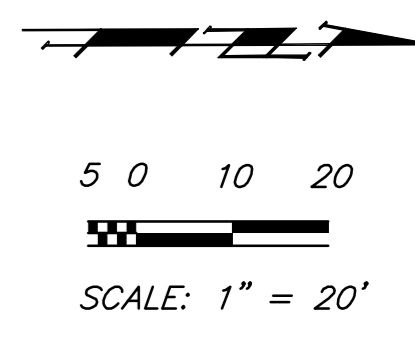

Remove and Replace Ex. Conc. WCR's Per Standard WCR Detail Sheet. (Both Sides)

**FRAZIER**  
39+43.52  
Sta 39+50.00 BL B  
Match Line

P.V.I.  
ELEV. = 1329.90 T.C.  
NO V.C.

Remove and Replace ±10' Ex. Conc. Sidewalk to Nearest Joint (Both Sides)

Sta 40+23.77 BL B  
Construct 30.2' Commercial Drive Ent (8" Reinf Concrete). Saw & Remove Ex. Pavement to 65.00' Rt. New Drive Pvmnt to Match @ Ex Asphalt 65.00' Rt.

Sta 41+16.01 BL B  
Construct 29.9' Commercial Drive Ent (8" Reinf Concrete). Saw & Remove Ex. Pavement to Face of Walk. New Drive Pvmnt to Match @ FW.

Sta 41+91.76 BL B  
Construct 29.9' Commercial Drive Ent (8" Reinf Concrete). Saw & Remove Ex. Pavement to Face of Walk. New Drive Pvmnt to Match @ FW.

Sta 42+94.23 BL B  
Construct 31.0' Commercial Drive Ent (8" Reinf Concrete). Saw & Remove Ex. Pavement to Face of Walk. New Drive Pvmnt to Match @ FW.

Sta 43+55.09 BL B  
Construct 30.0' Commercial Drive Ent (8" Reinf Concrete). Saw & Remove Ex. Pavement to Face of Walk. New Drive Pvmnt to Match @ FW.

Sta 44+00.00 BL B  
Match Line

Note:  
Trees/Shrubs to be removed are marked thus:

Note:  
Pavement, Sidewalks, and Etc. To Be Removed Are Indicated By:

Drawing File: E:\eng\central and tyler intersection\land\base.dwg  
Design: T. Azlere  
Drawn: J. F. Bradley  
Approved: J. F. Bradley  
Scale: 1:20

Project No. 0510E393 CAPITAL IMPROVEMENT PROJECT  
**CENTRAL & TYLER PAVING**  
**CENTRAL & TYLER INTERSECTION**  
PAVEMENT, STORM WATER SEWER, TRAFFIC CONTROL IMPROVEMENTS

**Baughman Company, P.A.**  
315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0149  
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

MAY 2008  
SHEET 8 OF 72