

PAVING PLANS FOR CEDAR VIEW VILLAGE

BRISTOL CIRCLE PAVING

SHEET TITLE
06189
PROJECT NUMBER

SRS
DESIGN BY
TKL
DRAWN BY
MAB
CHECKED BY

ISSUED
AUGUST 2008

REVISED
9-11-08


SHEET NO.
5 of 18

CURVE TABLE - C1					
$\Delta = 13^{\circ}20'40''$ R = 500.00' T = 58.49' L = 116.45' LC = 116.19'					
CURVE DATA BASED ON CENTERLINE $\Delta / 2 = 06^{\circ}40'20''$					
STATION	ARC	CHORD LENGTH		DEFLECTION	TOTAL DEFLECTION
		8' Off LtcB	8' Off RtCb		
12+96.99	—	—	—	00°00'00"	00°00'00"
13+25.00	28.01'	29.24'	26.77'	01°36'17"	01°36'17"
13+50.00	25.00'	26.10'	23.90'	01°25'57"	03°02'14"
13+75.00	25.00'	26.10'	23.90'	01°25'57"	04°28'11"
14+00.00	25.00'	26.10'	23.90'	01°25'57"	05°54'07"
14+13.44	25.00'	14.03'	12.85'	00°46'13"	06°40'20"
					Def/Ft = 3.43775 Min.

EXIST. UNDERGROUND
TELEPHONE TO BE
RELOCATED BY AT&T.
CONTACT JASON EDWARDS @
268-2008

EXIST. TRANSFORMER AND
UNDERGROUND ELECTRIC
TO BE RELOCATED
BY WESTAR.
CONTACT LADONNA
VANDERFORD @ 250-8963

NOTE: THE PROPOSED
STORM SEWER PIPE,
STRUCTURES AND RELATED
APPURTENANCES SHOWN ON
THESE DRAWINGS SHALL BE
CONSTRUCTED BY OTHERS
PRIOR TO PLACEMENT OF
PAVEMENT.

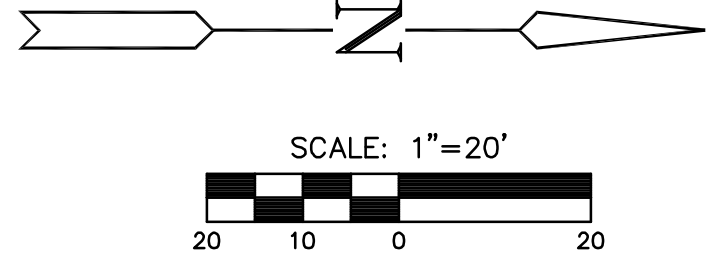

- LEGEND**
- STREET SIGN & SIGN LOCATION
(SEE SIGN ASSEMBLY TABLE
FOR TYPE & STATION OF SIGN)
 - C1 CURVE TABLE REFERENCE
 - VALLEY GUTTER
 - SIDEWALK REMOVAL

