

DESCRIPTION	UNIT OF MEASURE	QUANTITY
2" PVC CONDUIT	FOOT	1480
2" RGS CONDUIT	FOOT	20
2" PVC CONDUIT 90° ELBOW	EACH	22
2" RGS CONDUIT 90° ELBOW	EACH	2
TRENCH AND BACKFILL	FOOT	1480


\* FOR INFORMATION ONLY. THE BID ITEM "STREET LIGHTING" SHALL INCLUDE ALL ITEMS LISTED AND ALL EQUIPMENT AND MATERIALS NECESSARY FOR THE COMPLETE OPERATION OF THE ELECTRICAL LIGHTING SYSTEM.

#### PLAN NOTES:

1. FIELD VERIFY EXISTING CONDITIONS AND DIMENSIONS.
2. COORDINATE CONDUIT ROUTING WITH EXISTING UTILITIES AND CONDITIONS.
3. COORDINATE ALL REQUIREMENTS WITH WESTAR.

#### KEYED PLAN NOTES:

- ① STREET LIGHT FIXTURE, POLE, AND BASE PROVIDED AND INSTALLED BY WESTAR. BASE TO BE INSTALLED PRIOR TO CONDUIT INSTALLATION.
- ② (1)2" PVC CONDUIT WITH PULL ROPE FOR STREET LIGHTING CIRCUITING. CONDUCTORS TO BE PROVIDED AND INSTALLED BY WESTAR. CONDUIT TO BE INSTALLED AFTER BASES ARE INSTALLED. COORDINATE CONDUIT INSTALLATION WITH WESTAR.

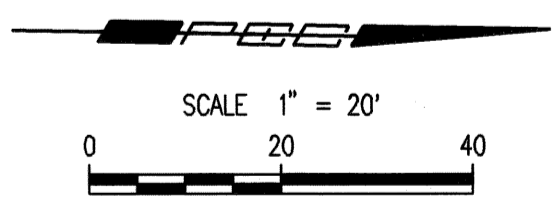

Saved 03-03-2009 10:55:44 AM by SMS  
 Plot Scale 1:20 03-03-2009 10:55:54 AM  
 E:\2008\08457\08457-E2-NORTH LIGHTING-TOPEKA by SMS

	No. _____	Revision _____	By _____	Date _____
	<b>TOPEKA STREET</b> <b>LIGHTING PLAN</b> <b>NORTH</b> JAMES L. ARMOUR, P.E.-CITY ENGINEER CITY OF WICHITA PROJECT NO. 472-84745			
	<b>Professional Engineering Consultants, P.A.</b> 303 S. TOPEKA • WICHITA, KANSAS 67202 316-262-2691 • FAX 316-262-3003			
	Designed by SMS	Job No. 08457	Date Feb., 2009	Sh. E2 of 2