

Benchmarks:

BM #1: Small RR spike in 2nd PP north of K-42 Highway, west side of Maize
Elev. = 143.61 (City Datum)

BM #2: Small RR spike in PP east of East 1/4 Corner (G)
Elev. = 147.00 (City Datum)

BM #3: "□" Top Headwall southeast corner K-42 Highway and Maize (County BM with City Datum)
Elev. = 144.04 (City Datum)



From Sta. 0+00.0 to Sta. 6+33.1, (Minus Flowable Fill Areas), 567.1 l.f. of Sanitary Sewer trench shall be sand backfilled and flushed. Shall be bid "L.F. Sand Backfilled and Flushed".

Sta. 3+14.0, Line 1 = Sta. 0+00, Line 2 Construct Standard Manhole.
Top Elev. = 148.10
MH Ht. = 18.52 l.f.

Sta. 6+33.1, Line 1 Construct Standard Manhole.
Top Elev. = 148.10
Match Point
MH Ht. = 18 l.f.

Existing dirt stockpile. Contractor to excavate through stockpile and place excess excavation onto lots and out of any easements and right-of-ways. (Contractor to visit site and verify stockpile size at time of bidding due to changing size).

SCALE:
1" = 40' HORIZONTAL
1" = 5' VERTICAL
• = IRON

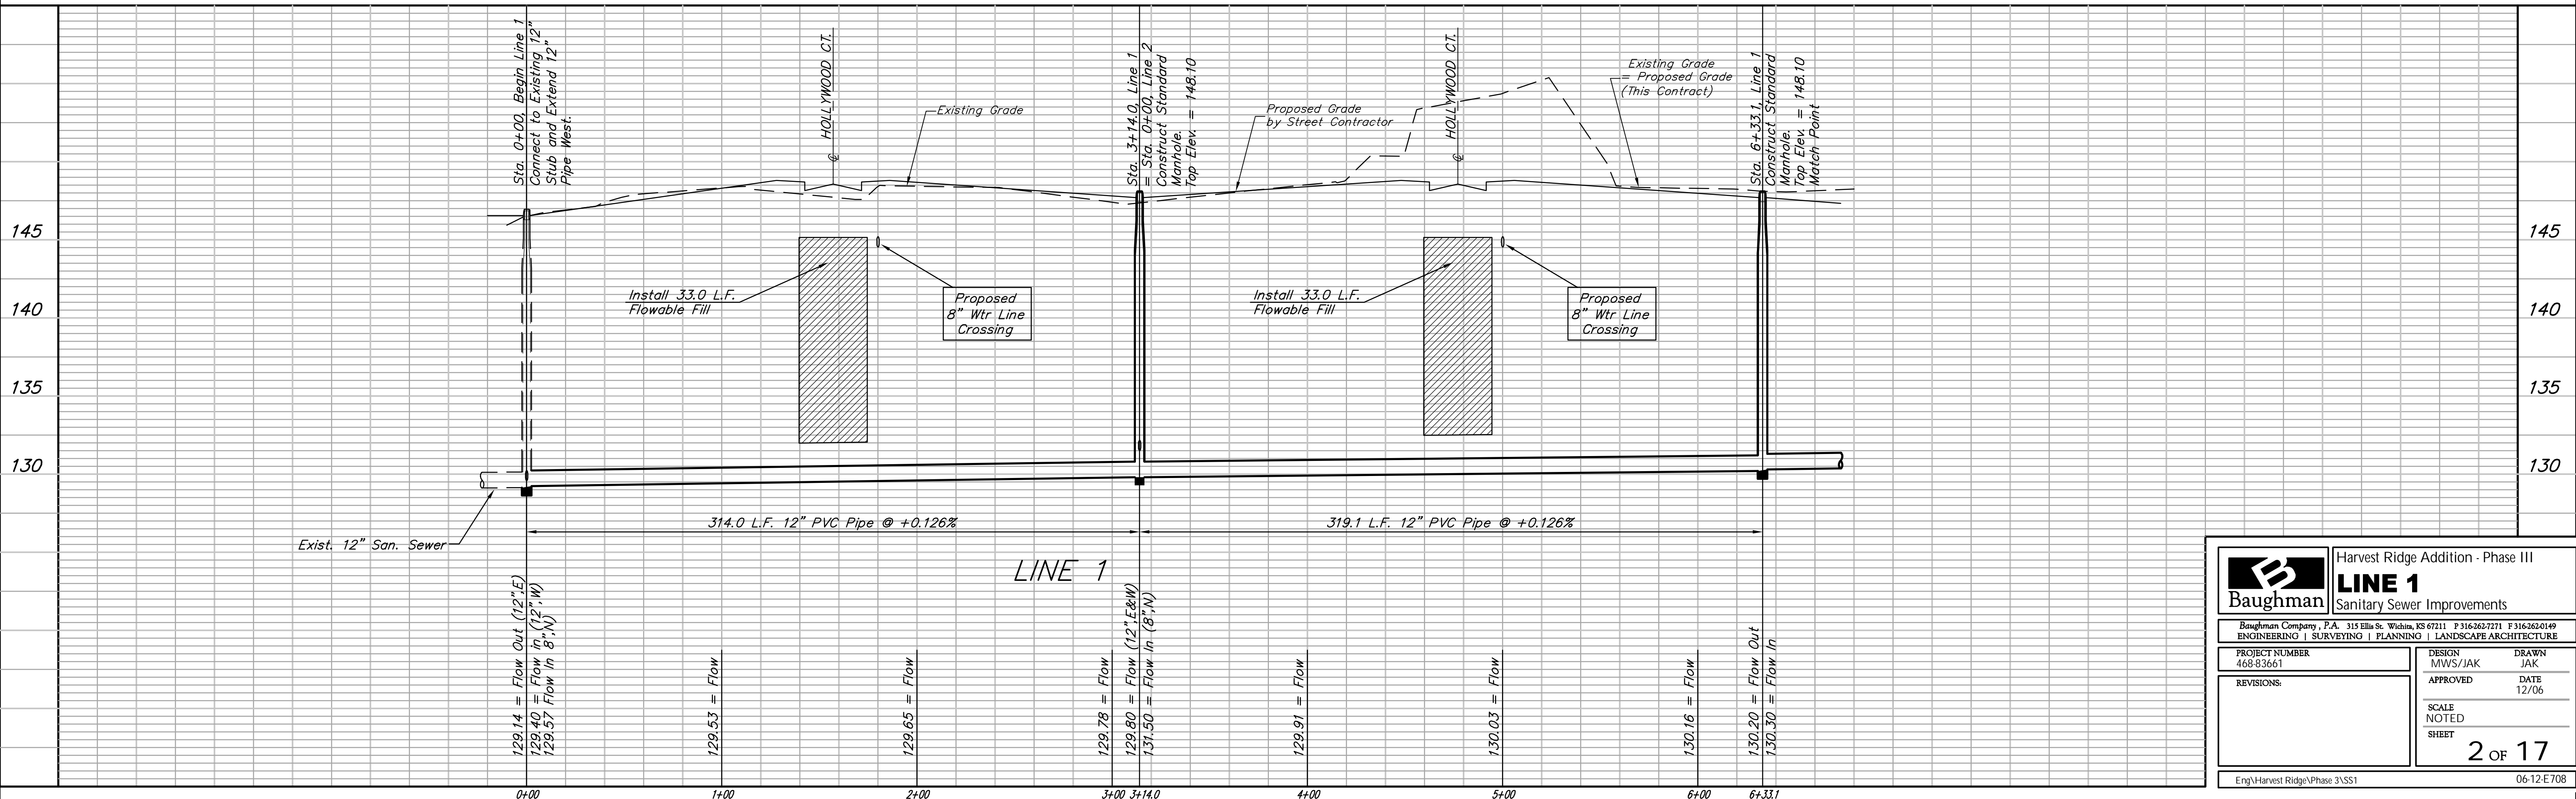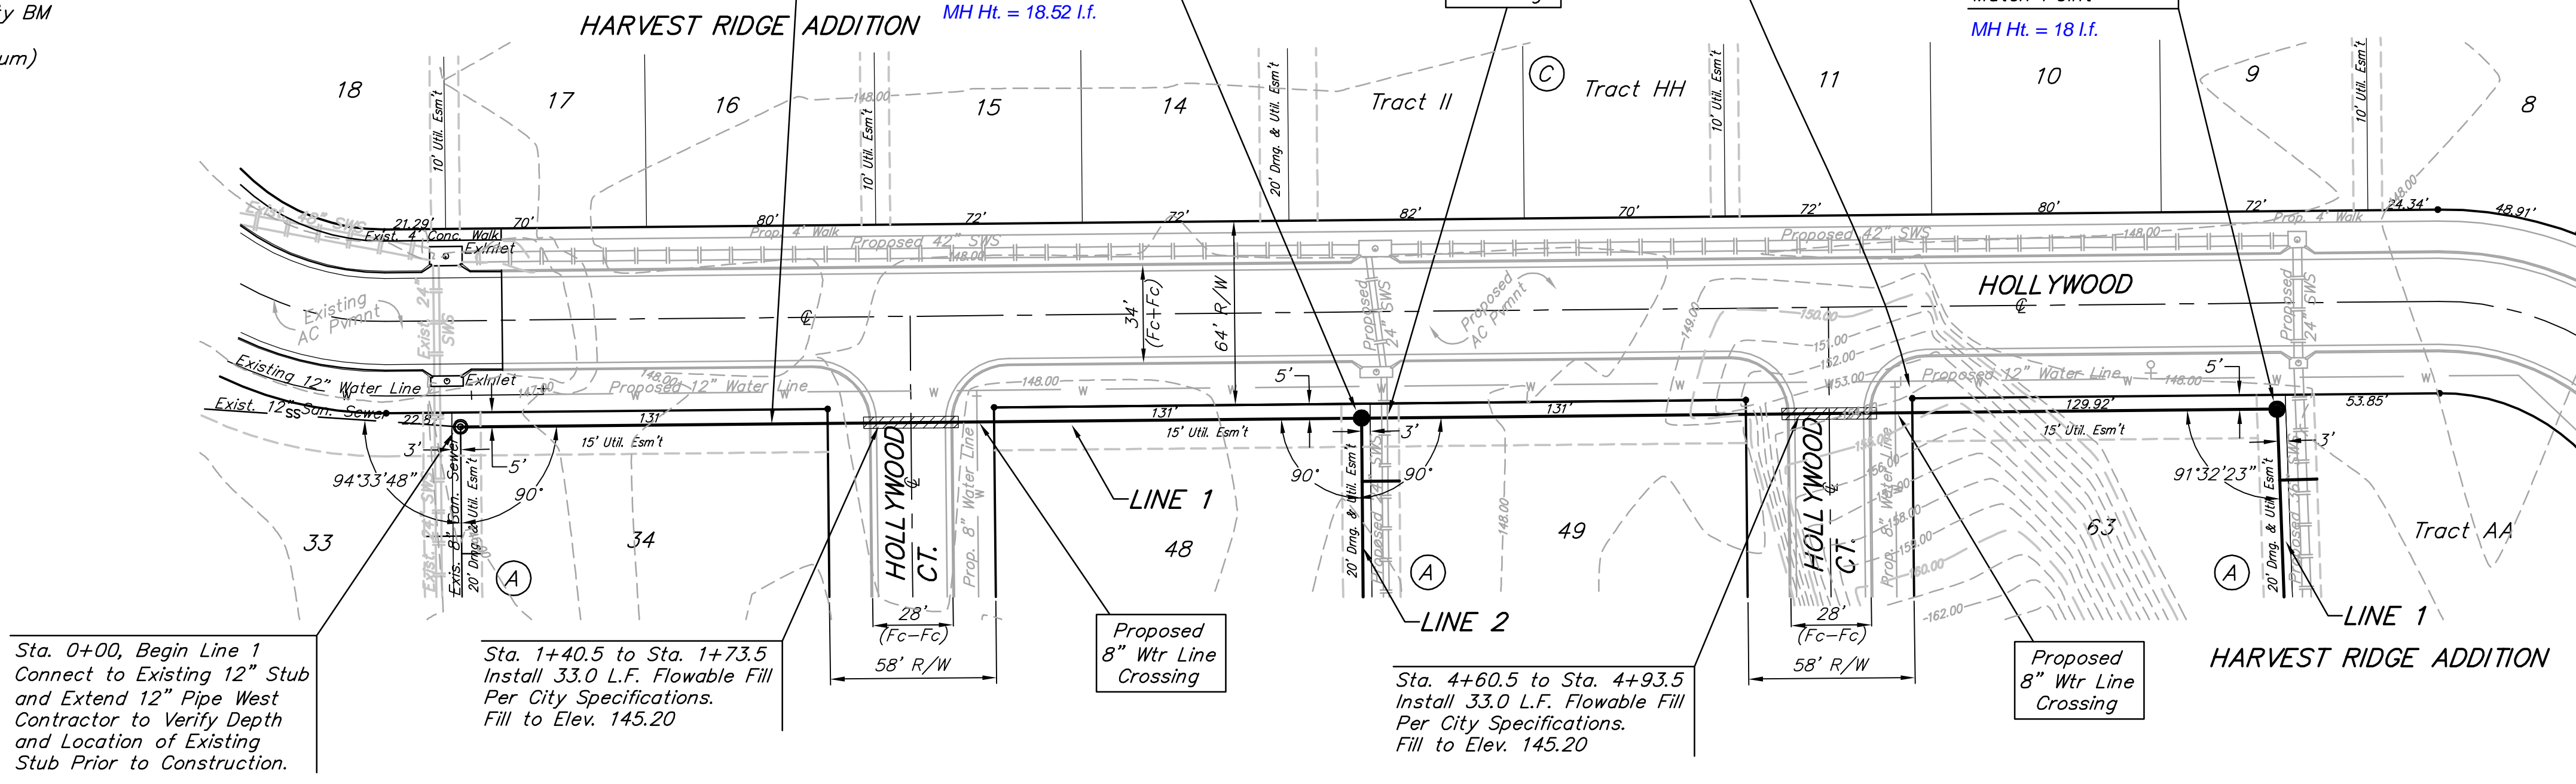

		Harvest Ridge Addition - Phase III	
LINE 1 Sanitary Sewer Improvements			
<small>Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7771 F 316-262-0149 ENGINEERING SURVEYING PLANNING LANDSCAPE ARCHITECTURE</small>			
PROJECT NUMBER 468-83661	DESIGN MWS/JAK	DRAWN JAK	
REVISIONS:	APPROVED	DATE 12/06	
	SCALE NOTED	SHEET 2 OF 17	
Eng\Harvest Ridge\Phase 3\SS1		06-12-E708	