

Facing Schedule			
Station	TOP Elev	Station	TOW Elev
0+00.0 to 0+10.0	1314.60	0+00.0 to 4+18.0	1316.10
0+10.0 to 0+18.0	1313.10	4+18.0 to 14+16.0	1317.60
0+18.0 to 0+22.0	1311.60	14+16.0 to 14+22.0	1316.10
0+22.0 to 0+30.0	1310.10	14+22.0 to 14+26.0	1314.60
0+30.0 to 0+34.0	1308.60	14+26.0 to 14+30.0	1313.10
0+34.0 to 0+38.0	1307.10	14+30.0 to 14+36.0	1311.60
0+38.0 to 5+90.0	1304.10		
5+90.0 to 6+22.0	1305.60		
6+22.0 to 11+64.0	1307.10		
11+64.0 to 14+36.0	1308.60		

Approximate Quantities		
Block Type	# Units	Facing %
Total Facing (SF)	15,471	
24 SF Units	436	68%
24 SF Top Units	156	24%
6 SF Units	149	6%
6 SF Top Units	44	2%
3 SF Units	12	0%
3 SF Top Units	2	0%
End Units (Top/Corner)	7	


STONE STRONG BLOCK LEGEND:

- 24 SF UNIT
- 24 SF TOP UNIT
- 6 SF UNIT
- 6 SF TOP UNIT
- END UNIT
- 3 SF UNIT
- 3 SF TOP UNIT
- DENOTES 30" C.I.P. TAIL EXTENSIONS
- DENOTES 24" C.I.P. TAIL EXTENSIONS
- DENOTES 18" C.I.P. TAIL EXTENSIONS
- DENOTES 6" C.I.P. TAIL EXTENSIONS

ELEVATION LEGEND

- P.C. POINT OF CURVATURE
- P.T. POINT OF TANGENCY

ELEVATION SCALES:
HORIZ. - 1"=20'
VERT. - 1"=5'

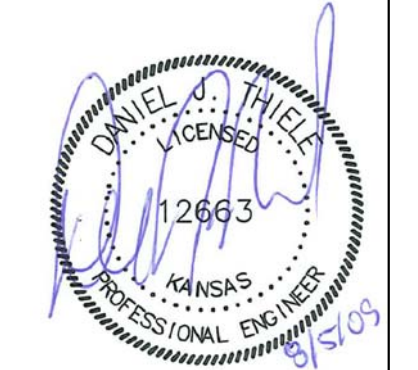

**MAIZE 54 ADDITION
RETAINING WALL
WALL ELEVATIONS & SCHEDULES**

CITY OF WICHITA, KANSAS
JAMES L. ARMOUR, P.E. - CITY ENGINEER

Project No. _____ OCA No. _____

POE & ASSOCIATES OF KANSAS, INC.
CONSULTING ENGINEERS
5940 E. Central, Suite 200 Wichita, KS 67208-4242
Phone 316/685-4114 FAX 316/685-4444

Designed By: E. Owen
Drawn By: M. Stovneck
Drawing: 09225.00.dwg
Date: 08/05/09

Revision
No. _____ By _____ Date _____
Approved _____
No. _____

Sheet
21 of 25