


STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	87 N-0386-01	2009	254	255

POND EARTHWORK			
STATION	AREA	VOLUME	CUMULATIVE VOLUME
	Square Feet	Cubic Yards	Cubic Yards
	CUT	CUT	CUT
11+00.00	604.1		
11+50.00	736.3	1241.1	1241.1
12+00.00	716.9	1345.6	2586.7
12+50.00	723.6	1333.8	3920.5
13+00.00	619.4	1243.5	5164.0
13+50.00	495.1	1031.9	6195.9
14+00.00	614.0	1026.9	7222.8
14+50.00	596.7	1121.0	8343.8

The Earthwork Quantities in these tables have been figured using the Average End Area Method. These Quantities have NOT been adjusted by any factors.

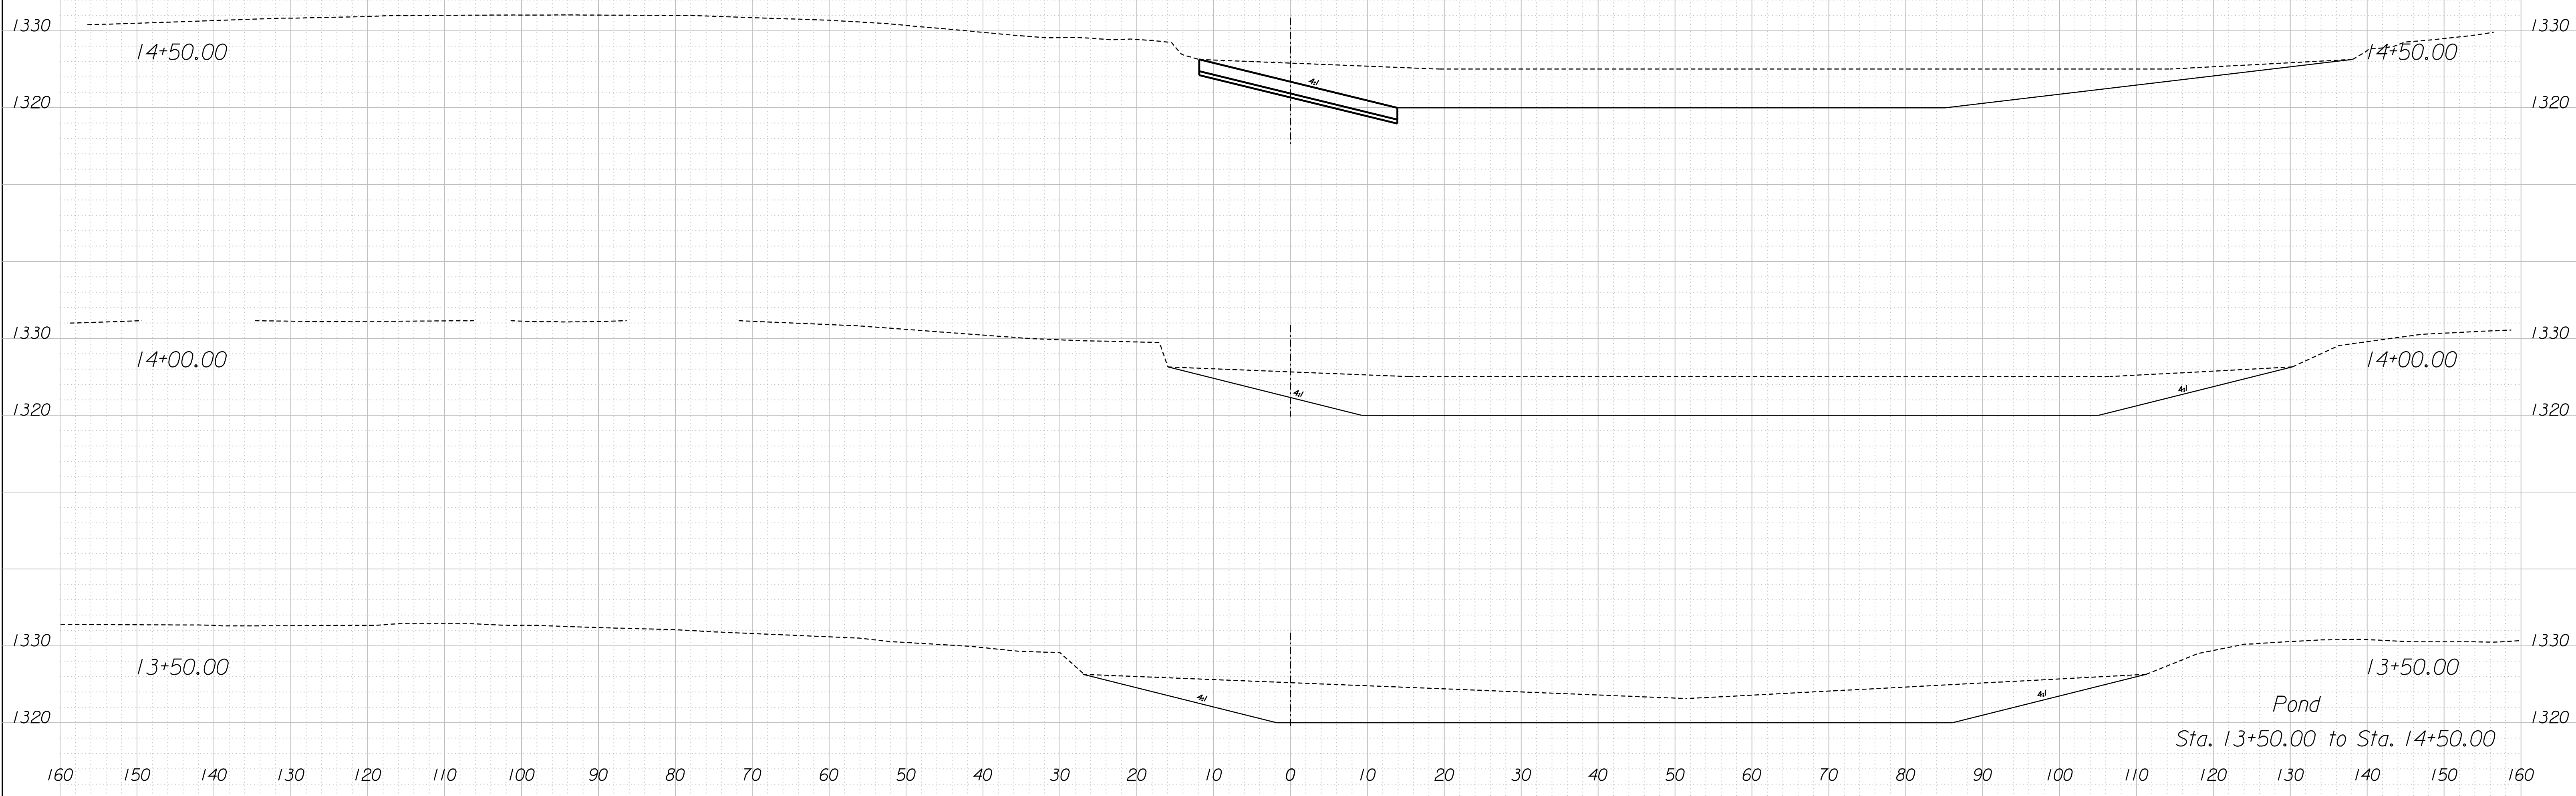

Drawn By: Plotted: 11/24/2009  
 File: K:\35751A\CADD\SHEETS\ROADWAY\SECTION\GRN\WHCHXS.dgn