


- EROSION CONTROL SITE PLAN - GENERAL NOTES
1. INSTALL PERIMETER ROCK BAG BARRIERS AND/OR SILT FENCES PRIOR TO REMOVING TOPSOIL OR BEGINNING GRADING ACTIVITIES.
  2. INSTALL STABILIZED CONSTRUCTION ENTRANCE IN ANY AREA DRAINING INTO THE POLLUTION CONTROL SYSTEM.
  3. CONSTRUCT ROCK BAG DITCH CHECKS AS SHOWN ON THE APPROVED PLAN AND AS NECESSARY TO PREVENT EROSION DAMAGE PRIOR TO PAVING.
  4. MAINTAIN ALL EROSION CONTROL MEASURES UNTIL ALL PAVEMENT AND/OR GROUND COVER IS ESTABLISHED.
  5. AFTER ALL PRECIPITATION OF 0.5 INCHES OR GREATER, EROSION CONTROL FACILITIES SHALL BE INSPECTED AND MAINTAINED AS NECESSARY AND IN ACCORDANCE WITH THE STORM WATER POLLUTION PREVENTION PLAN (SWPPP). INSPECTION REPORTS SHALL BE KEPT ON-SITE AS DIRECTED IN THE SWPPP.
  6. ALL COMPLETED FORMS AND A STORM WATER POLLUTION PREVENTION PLAN MANUAL SHALL BE KEPT AND POSTED ON SITE AS REQUIRED. A COPY OF THE EROSION CONTROL PLAN SHALL BE MAINTAINED AT THE SITE AND MADE AVAILABLE TO INSPECTORS AT ALL TIMES DURING CONSTRUCTION HOURS.
  7. A PERSON IN RESPONSIBLE CHARGE SHALL BE AVAILABLE DURING CONSTRUCTION HOURS TO SUPERVISE IMPLEMENTATION AND MAINTENANCE OF THE POLLUTION PREVENTION PLAN.

# WICHITA WATERWALK

## PUBLIC IMPROVEMENTS PHASE 2 PACKAGE 2


No.	Date	Description
5,30,06	05-30-06	BID SET
4,27,06	04-27-06	FIELD CHECK SET

<b>EROSION &amp; SEDIMENTATION CONTROL PLANS</b>	
Job No.	EC1.1
Date	05-30-06
Drawn	BC
Checked	PB
	Date: 4 of 95

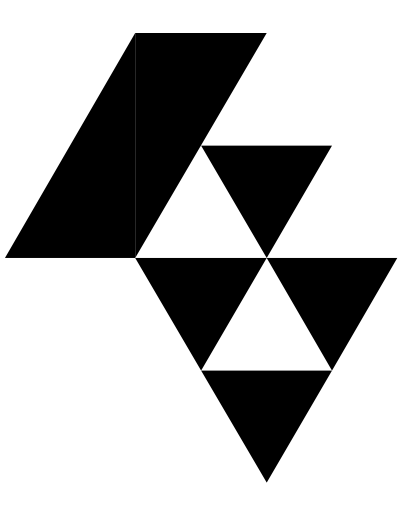

**Gossell Livingston**  
 Architecture  
 Wichita, KS 67202  
 Tel: (316) 265-9387  
 Fax: (316) 265-9646  
 Email: gossell@gl.com

© 2016 Gossell Livingston Associates, Inc.  
 The drawing and all information herein is the exclusive property of Gossell Livingston Associates, Inc. and is not to be copied or used in any way without the express written consent of Gossell Livingston Associates, Inc. All contents, the original and any reproductions, shall be the property of Gossell Livingston Associates, Inc.



**Johnson & Associates, Inc.**  
 100 E. California Ave. - Third Floor  
 Oklahoma City, OK 73104  
 (405) 235-8073 FAX (405) 235-8078  
 Certificate of Authorization RE-1728 EXP. DATE: 12-31-2016

Auto File: H:\2215\2215 Ph 2\2215012 Ph 2 Streets\2215012-EC1.dwg, 5/26/2006 3:41 PM, Peter Borrelli  
 SHEET 04 OF 95