BENCHMARKS:
135th St. W. & 13th St. N.
City of Wichita Disc at southwest corner of intersection, 30.00'± S. of ℄ of 13th St. N. 35.00'± W. of ℄ of 135th St. W.
Elev. = 1355.65 MSL (NGVD 29)

"□" Cut in top of curb north side of Westport adjacent to the southeast corner of Lot 30, Block D, Silverton Addition.
Elev. = 1364.44 MSL (NGVD 29)

"□" Cut in curb inlet top at the west end of Bellick Ct. adjacent to Lot 10 & Lot 11, Block D, Silverton Addition.
Elev. = 1364.12 MSL (NGVD 29)

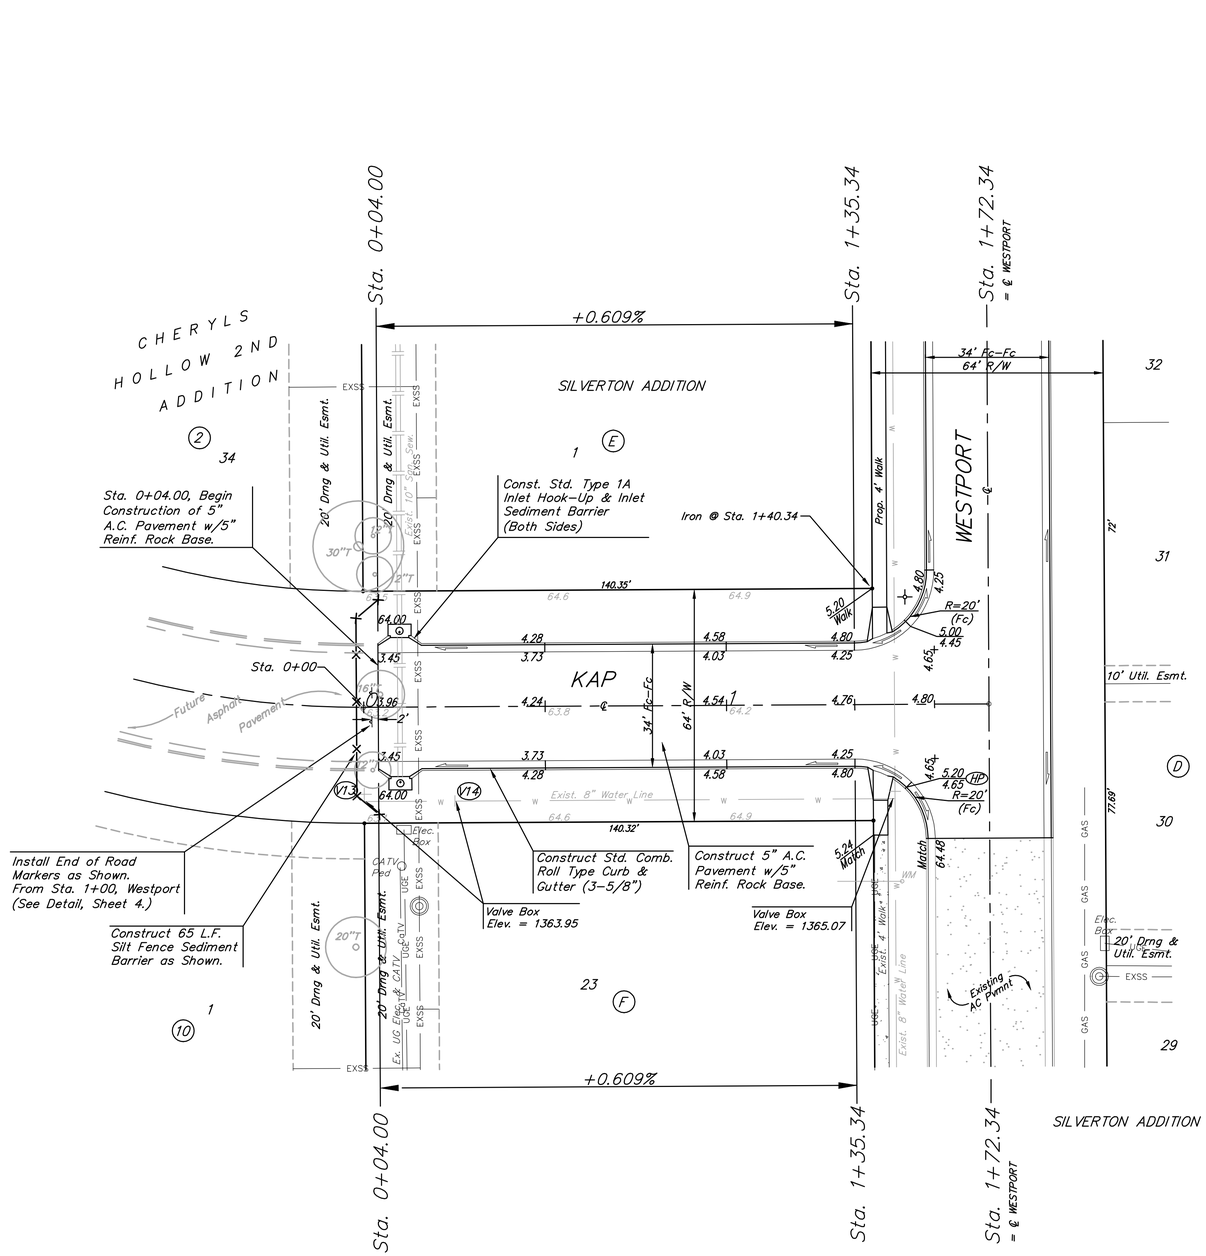

20 0 20
Scale: 1" = 20'
• = Iron

WATER VALVE LOCATION TABLE

VALVE NUMBER	STREET	BASELINE STATION	OFFSET DISTANCE	OFFSET DIRECTION
V1	Westport	1+10.26	26'	Lt.
V2	Westport	1+86.26	26'	Lt.
V3	Westport	3+95.26	26'	Lt.
V4	Kentucky Ln.	10+50.67	26'	Lt.
V5	Kentucky Ln.	11+09.63	26'	Lt.
V6	Willoughby	0+02.59	26'	Lt.
V7	Willoughby	0+22.59	26'	Lt.
V8	Willoughby	1+36.13	26'	Lt.
V9	Willoughby	0+84.17	26'	Lt.
V10	Willoughby Cir.	4+27.70	39.73'	Rt.
V11	Kentucky Cir.	4+78.68	23'	Rt.
V12	Kentucky Cir.	5+69.18	23.37'	Lt.
V13	Kap	0+00.00	26'	Rt.
V14	Kap	0+25.00	26'	Rt.

Paving contractor will be responsible to operate all water valves on the project, in the presence of the inspector, to ensure accessibility to the valves, and that all valves are left in the "ON" position when the project is completed.

Existing trees which are in direct conflict with proposed new construction shall be removed by the Contractor ONLY with approval of the Engineer. Trees not in direct conflict with proposed new construction shall remain and be protected from damage. Cost shall be included in bid item "Site Clearing"

Roll type curb & gutter to be constructed on the pavement on this sheet.
Top of curb elevation are given for full height curb.

Baughman

Silverton Addition - Phase 4
KAP
STA. 0+04.00 TO STA. 1+72.34

Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316.262.7271 F 316.262.0149
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER 472-84462
DESIGN JAK
DRAWN GRF/TMS
APPROVED NBW
DATE 2/07/11
SCALE Noted
SHEET 12 OF 42
REVISIONS:

E:\Projects\Silverton\Engineering\Phase 4\STR_0904-E288\12_Str7.dwg