


**EARTH WORK TOTALS**

	C.Y. Excavation	C.Y. Fill
Mass Grading	10,416	3,475
Pond Construction	43,603	0
<b>Total</b>	<b>54,019</b>	<b>3,475</b>

All excess excavation shall be removed from site, the cost of which shall be included in "Site Restoration". Earthwork quantities are for reference only. All cost associated with mass grading shall be incidental to lump sum bid item "Mass Grading".

- Contractor to strip top 3" of soil within proposed pond area before mass grading and stockpile. Top soil stockpile to be redistributed around pond area above water surface.
- Compaction of 95% shall be obtained in all street R/W's, 90% in all other areas.
- It shall be the Contractor's responsibility to protect the existing utilities during mass grading. Any damage done to these systems by Contractor or subcontractor shall be repaired at no additional cost to the project.
- All areas disturbed by construction (except within street R/W) shall be seeded as indicated on Pond Plan.

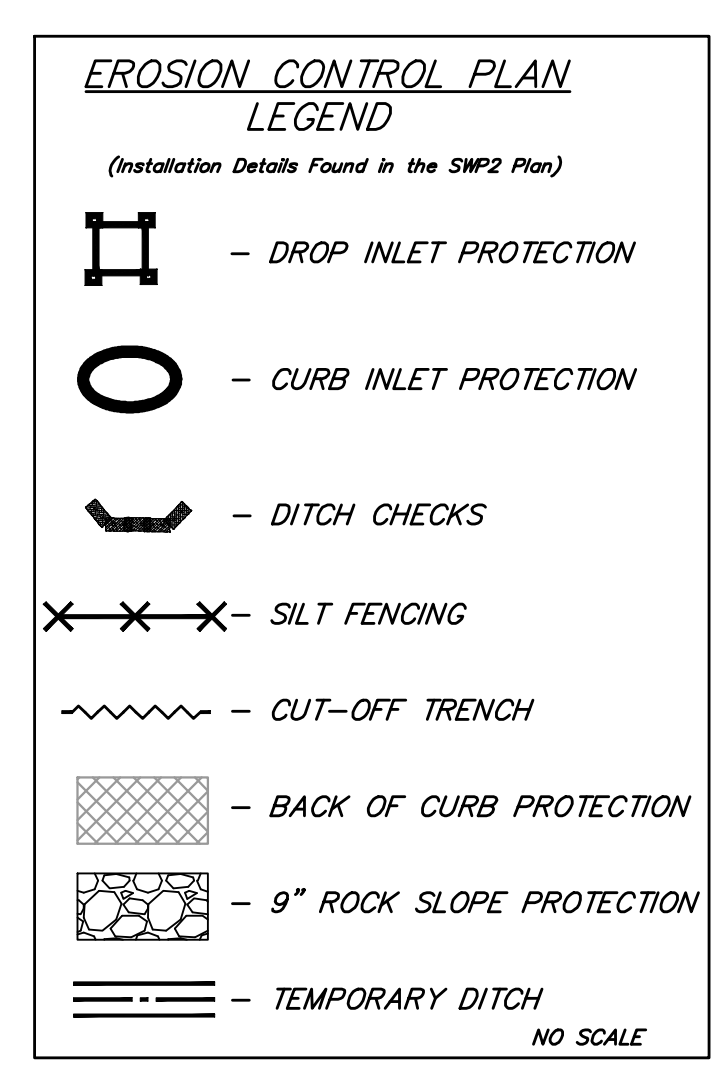

**Baughman** Stonebridge 2nd PH. II & 3rd Addition  
**MASS GRADING PLAN**  
WICHITA, KANSAS

Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0149  
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER 468-84734	DESIGN TJW	DRAWN TMS
REVISIONS:	APPROVED NBW	DATE 05/11
SCALE Noted		<b>14 OF 23</b>
SHEET		

14-15 mass-pond.dwg 11-02-E590