

**LEGEND**

- Area Inlet Barrier
- Curb Inlet Filter
- Ditch Check
- Brick Treatment
- Silt Fence
- Bermuda Grass Sod
- Fescue Sod

*For Information Only*

Sodding Bermuda	25,216 sy
Sodding Fescue	554 sy
Lot Select Soil/Seeding	17,122 sy


Place select soil and seed per Project Special Provisions.  
(3,300 sq. ft.)

Place select soil and seed lot per Project Special Provisions.  
(4,800 sq. ft.)

Place select soil and seed lot per Project Special Provisions.  
(8,400 sq. ft.)

Place select soil and seed lot per Project Special Provisions.  
(4,200 sq. ft.)

Place select soil and seed lot per Project Special Provisions.  
(8,400 sq. ft.)

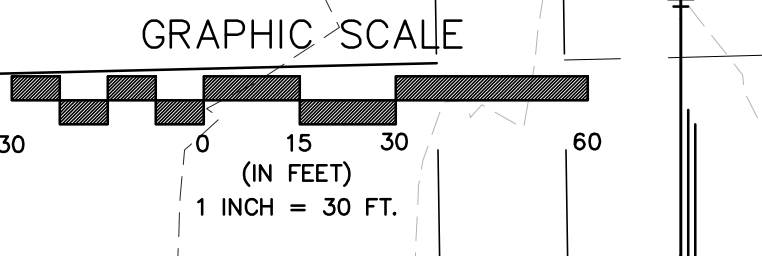

No.	Date	By	Approved	Revision

13TH STREET NORTH FROM KANSAS TO OLIVER  
EROSION CONTROL PLAN/SODDING  
CITY OF WICHITA, KANSAS  
STA. 0+00 TO 17+00

POE & ASSOCIATES, INC.  
CONSULTING ENGINEERS  
5940 E Central, Suite 200 • Wichita, KS 67208-4242  
Phone 316/685-4114 • FAX 316/685-4444

**FINAL**

Engineer: P. FERGUSON  
Designer: P. FERGUSON  
CITY Job No.: 472-84320    Poe Job No.: 1871  
Date: March, 2012

Sheet  
155 of 374