

SCALE 1" = 40'  
1" = 5' (VERT.)

NEW WATER METER SUMMARY

No.	BL Station	Lt./Rt.	Service (Long or Short)	Meter Size	Address	AS BUILT
37	21+39.38	Rt.	Long	0.63	2014 S. POPLAR ST.	
38	21+87.23	Rt.	Long	0.63	2008 S. POPLAR ST.	
39	22+11.02	Lt.	Short	0.63	2448 E. MT. VERNON	
40	22+46.35	Rt.	Long	0.63	2002 S. POPLAR ST.	

STA. 9+74.87 LINE 8  
BL STA. 9+74.91, 21.00' RT.  
CONNECT TO EXISTING 8" WATER MAIN.  
\*1 - 8" x 8" TAPPING SLEEVE  
\*1 - 8" TAPPING VALVE  
\*1 - 6" VALVE BOX TOP ELEV. MATCH  
\*FURNISHED AND INSTALLED BY DEPT. OF WATER AND SEWER.


NEW WATER METER SUMMARY

No.	BL Station	Lt./Rt.	Service (Long or Short)	Meter Size	Address	AS BUILT
1	12+09.45	Rt.	Short	0.63	2501 E. KINKAID ST.	
2	12+75.77	Rt.	Short	0.63	2507 E. KINKAID ST.	
3	12+62.48	Rt.	Short	0.63	2515 E. KINKAID ST.	

NOTE: FIELD ADJUST TAP LOCATION TO CLEAR EXISTING FENCE. REMOVE/REPLACE SIDEWALK AS NECESSARY FOR CONSTRUCTION.



STA. 15+12.19 LINE 8  
BL STA. 15+05.77, 33.00' RT.  
CONNECT TO EXISTING 6" WATER MAIN.  
\*1 - 6" x 6" TAPPING SLEEVE  
\*1 - 6" TAPPING VALVE  
\*1 - 6" VALVE BOX TOP ELEV. MATCH  
\*1 - 8" x 6" MJ X PE REDUCER  
\*1 - 8" 45' PE X MJ BEND  
\*FURNISHED AND INSTALLED BY DEPT. OF WATER AND SEWER.

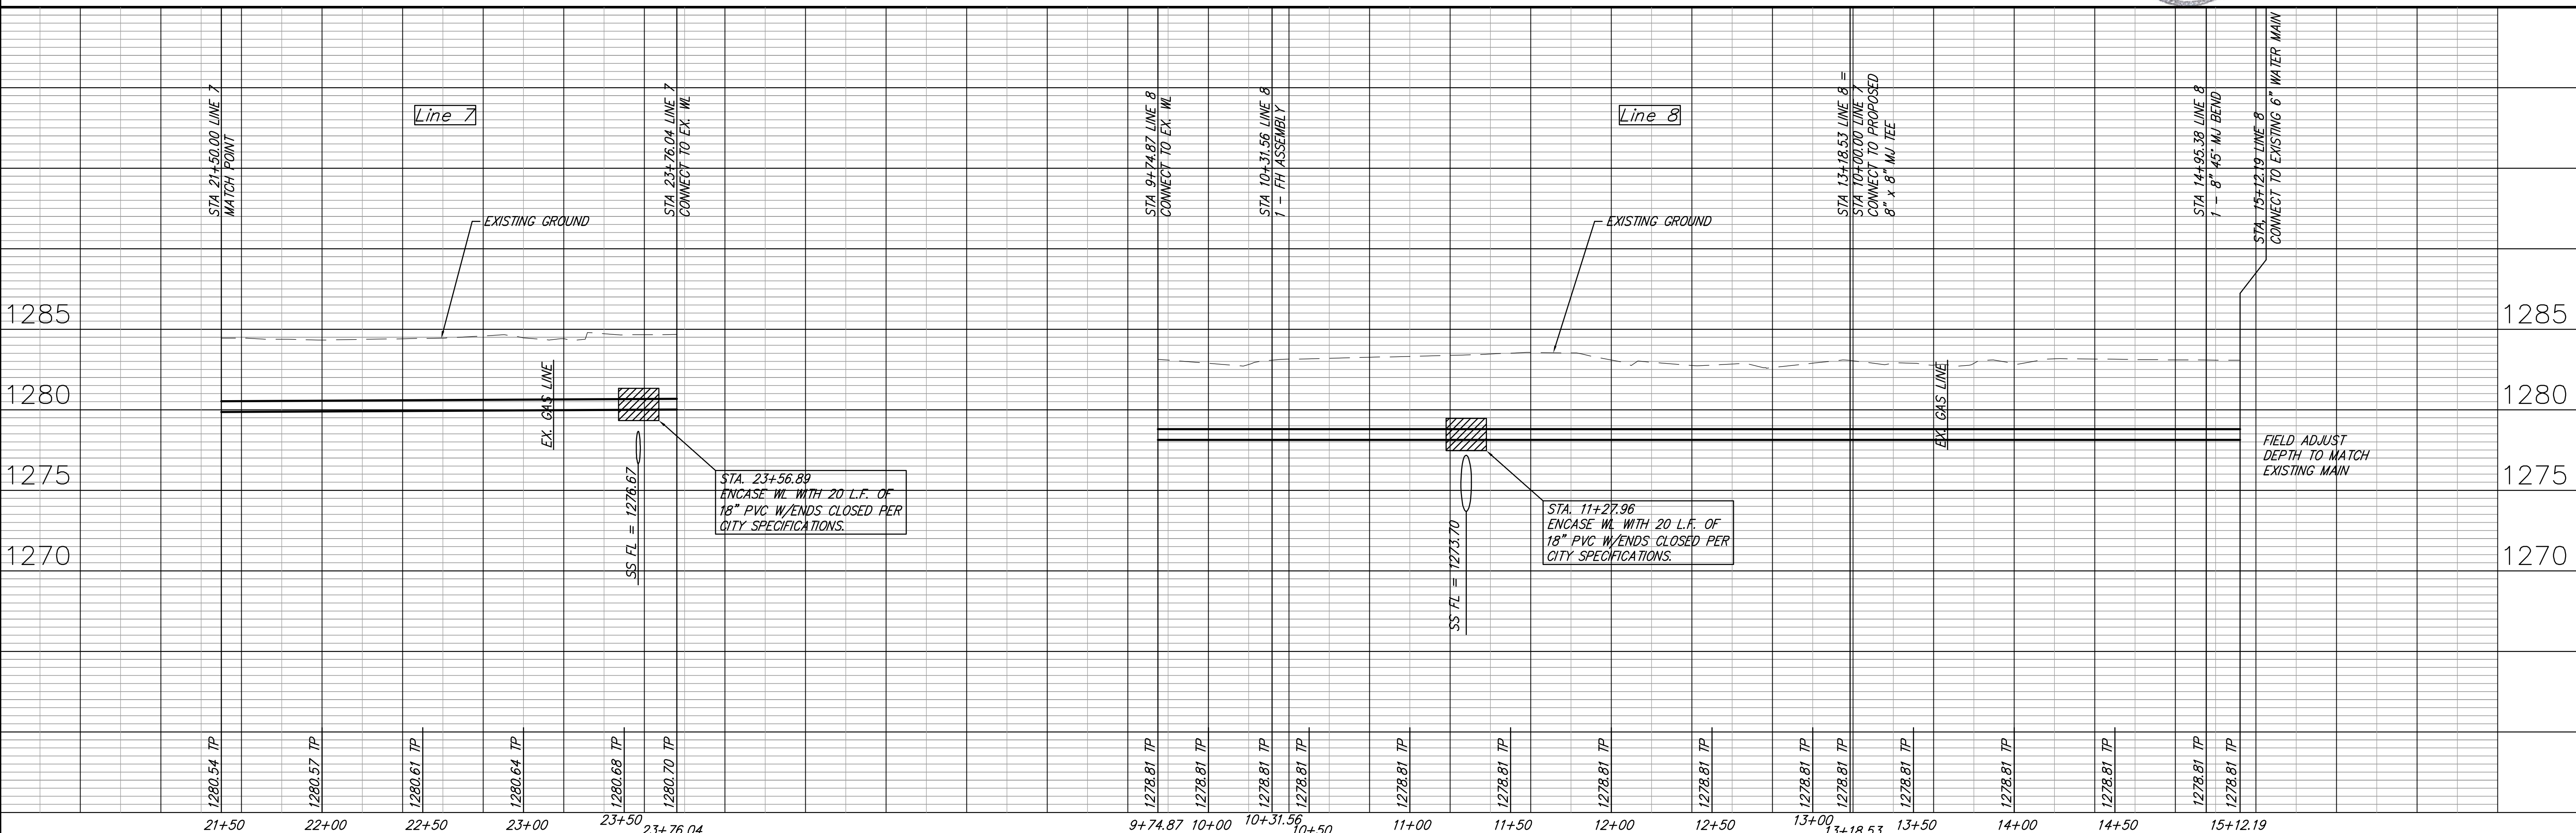

REVISIONS

NO.	DATE	BY	REVISION
1	Aug. 3, 2012	MLP	REVIEW
2		PC	DESIGN
3		UTILITY	MLP

PROJECT NUMBER: 448-90214  
DRAWING FILE: ENG. BASE LINE 7&8

SCHRADER WATER DISTRIBUTION  
POPLAR & KINKAID (LINE 7&8)  
WICHITA, KANSAS

RB JOB: 2970W  
SHEET: 12 OF 24