


EROSION CONTROL MEASURE	INSTALL	MAINTAIN	REMOVE
BACK OF CURB PROTECTION (LF)	0	0	0
CONSTRUCTION ENTRANCE (EA)	0	1	0
CURB INLET BARRIER (EA)	0	0	0
DITCH CHECK (EA)	0	0	0
DROP INLET PROTECTION (EA)	0	0	0
EROSION CONTROL (LS)	0	0	0
EROSION CONTROL BERM (LF)	0	0	0
SILT FENCE (LF)	0	842	0
EROSION CONTROL MAT (SY)	0	0	0

QUANTITIES ARE FOR INFORMATION ONLY! CONTRACTOR SHALL VERIFY QUANTITIES PER FINAL BID QUANTITY SHEET.

\* ALL EXISTING BMPs INCLUDING CONSTRUCTION ENTRANCE, SEDIMENT BARRIERS, SILT FENCE, CUT-OFF TRENCH, AND EROSION CONTROL MAT SHALL BE MAINTAINED AND REPAIRED IF NECESSARY. REPLACEMENT OR REMOVAL OF EROSION CONTROL MEASURES TO BE PAID FOR BY L.S. BID ITEM "MAINTAIN EXISTING EROSION CONTROL BMPs"

**EROSION CONTROL PLAN LEGEND**

- DROP INLET PROTECTION
  - CURB INLET PROTECTION
  - DITCH CHECKS
  - SILT FENCING
  - CUT-OFF TRENCH
  - BACK OF CURB PROTECTION
  - EROSION CONTROL MAT
  - TEMPORARY DITCH
- NO SCALE

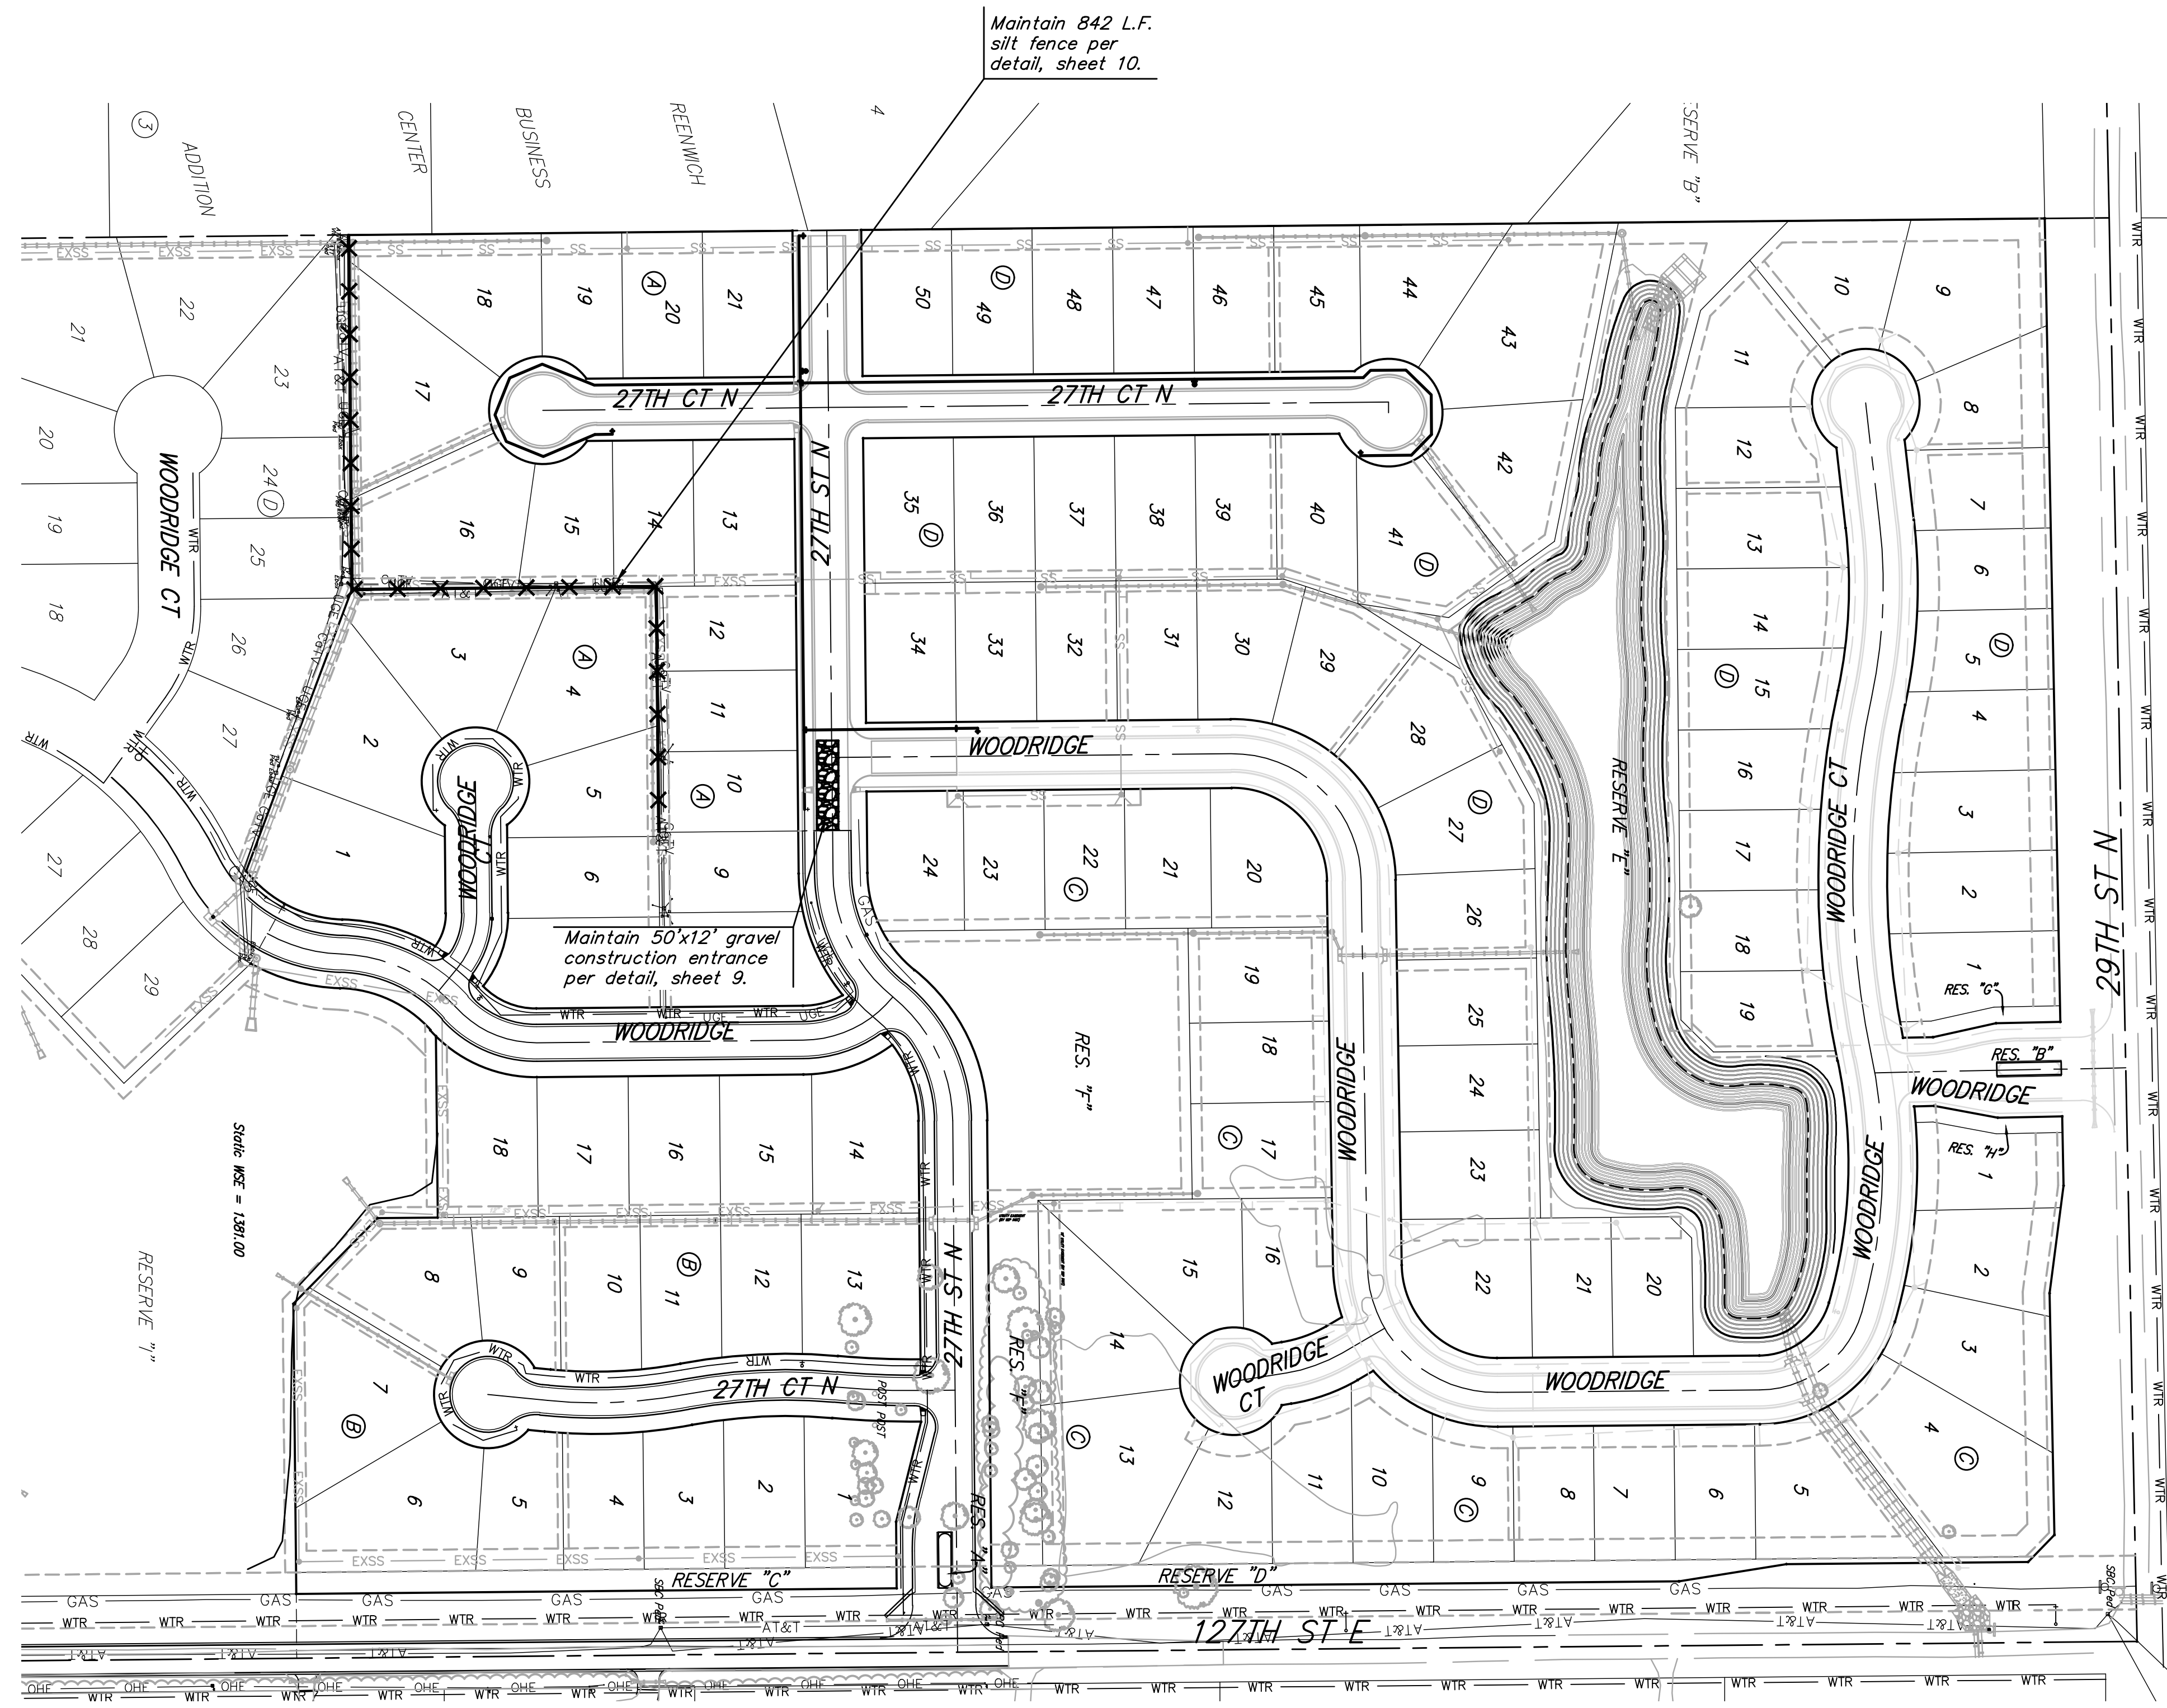

	<b>Woods North 3rd Addition - Phase II</b> <b>EROSION CONTROL PLAN</b> <b>WATER DISTRIBUTION SYSTEM</b>	
	Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0149 ENGINEERING   SURVEYING   PLANNING   LANDSCAPE ARCHITECTURE	
PROJECT NUMBER <b>448-90555</b>	DESIGN <b>AEG</b>	DRAWN <b>TMS</b>
REVISIONS:	APPROVED 	DATE <b>9/23/13</b>
SCALE Noted		SHEET <div style="text-align: center; font-size: 12px; font-weight: bold;">8 OF 14</div>