

MAIZE CT. PAVING WITH INCIDENTAL STORM WATER SEWER IMPROVEMENTS

to serve SOUTHERN RIDGE ADDITION

CITY OF WICHITA, KANSAS

James L. Armour, P.E. Acting City Engineer

Project Number

472-83956

OCA Number

765860

GENERAL NOTES:

- Contractor will be required to provide notice to utility companies a minimum of twenty-four (24) hours prior to any excavation, as follows:

Kansas One-Call	687-2470
Cox Communications	262-4270
Kansas Gas Service	1-888-482-4950
Westar Energy	383-8650
Aquila Energy	1-888-303-0357
SBC	268-2245
City of Wichita Water Dept.	268-4563
City of Wichita Sewer Maint.	268-4024
City of Wichita Storm Sewer Maint.	268-4090
City of Wichita Traffic Maint.	268-4034
Conoco Pipeline Co.	1-800-231-2551
Southern Star Pipeline Co.	529-6600
Phillips Pipeline Co.	1-800-766-8230
- The Contractor must notify the following in case of an emergency:

Cox Communications	262-4270
Kansas Gas Service	1-888-482-4950
Westar Energy	383-8650
Aquila Energy	1-888-303-0357
SBC	268-2245
City of Wichita Water Dept.	268-4563
City of Wichita Sewer Maint.	268-4024
City of Wichita Storm Sewer Maint.	268-4090
City of Wichita Traffic Maint.	268-4034
Conoco Pipeline Co.	1-800-231-2551
Southern Star Pipeline Co.	529-6600
Phillips Pipeline Co.	1-800-766-8230
- All existing and proposed erosion control measures including silt fencing, erosion control mat, straw bales, inlet barriers, and const. entrance shall be maintained throughout construction by the contractor and until project is accepted by the City of Wichita. The on-site engineer shall complete weekly reports on the status of erosion control measures. The contractor shall be required to comply with maintenance and/or replacement of erosion control measures as determined by the on-site engineer until project is accepted by City of Wichita. Maintenance and/or replacement of erosion control measures to be paid by L.S. bid item "Erosion Control BMP's."
- The contractor shall adjust valve boxes as necessary to match proposed grade. Cost to be included in bid item, "Site Clearing & Restoration."
- All areas disturbed during construction within Maize St. R/W shall be seeded, mulched, and fertilized as follows (Permanent Seeding):

Seed:	Kansas Premium Fescue Blend:
	8 lbs./1000 sq. ft.
Mulch:	Prairie Hay: 2 tons/acre
Fertilizer:	12-24-12: 850 lbs./acre
- All other areas disturbed by construction shall be temporary seeded as follows (Temporary Seeding):

Seed:	Rye Grass: 300 lbs./acre
-------	--------------------------
- All costs associated with seeding, mulching, and fertilizing shall be included in bid item "Site Clearing & Restoration." All seeding operations shall conform to City of Wichita Standard Specifications.
- Contractor shall contact engineer for location of contractor borrow prior to construction.

Sheet Index

Title Sheet	1
Pavement Detail	2
Sign Detail	3
Entrance Detail	4
Maize Ct.	5
Line 1	6
Misc. Grading	7
Std Type 1A Inlet Detail	8
Special Yard Inlet Detail	9
Erosion Control Plan	10
Erosion Control BMP's	11-14
Earthwork Cross Sections	15-16
Copy of Plat	17


Scale: 1" = 150'

Benchmark

- BM #1: COW BM at the SW corner of Pawnee Ave. and Maize Road.
Elev. = 135.15 (City Datum)
- BM #2: "□" in top of curb on the north side of Yosemite, 65' east of Maize Road.
Elev. = 143.67 (City Datum)
- BM #3: COW BM at Shefford on the south side of Pawnee Ave.
Elev. = 145.53 (City Datum)

Project Earthwork Totals
 Excavation = 31 C.Y.
 Compacted Fill = 1140 C.Y.
 Contractor Borrow = 2189 C.Y.

Total Project Length
 290 L.F. = 0.05 Miles

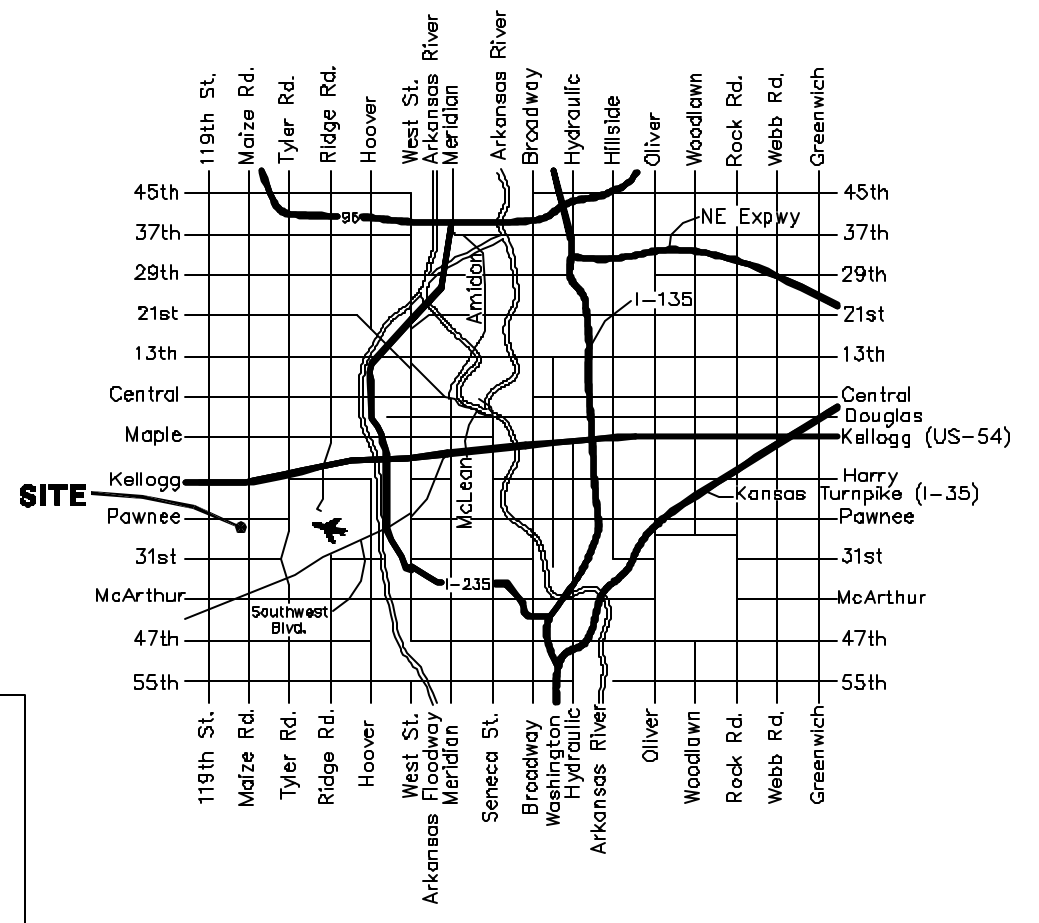

Vicinity Map

Benefit District [Hatched Box]

Proposed Streets: [Cross-hatched Box]