

STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	87 N-0612-01	2015	66	84





CONSTRUCTION PLANS FOR  
**21ST STREET BRIDGE AT DERBY REFINERY**  
 WICHITA, KANSAS

©2013 MKEC Engineering All Rights Reserved  
 These drawings and their contents, including, but not limited to, all concepts, designs, & ideas are the exclusive property of MKEC Engineering (MKEC), and may not be used or reproduced in any way without the express consent of MKEC.

**PAVEMENT MARKING AND SIGNING PLAN**

PROJECT NO.	472-85120	
DATE	JULY 2015	
SCALE	1"=20'	
DESIGNED	DRAWN	CHECKED
JRA	JSB	JRA
NO.	REVISION	DATE
SHEET NO.		
66 OF 84		

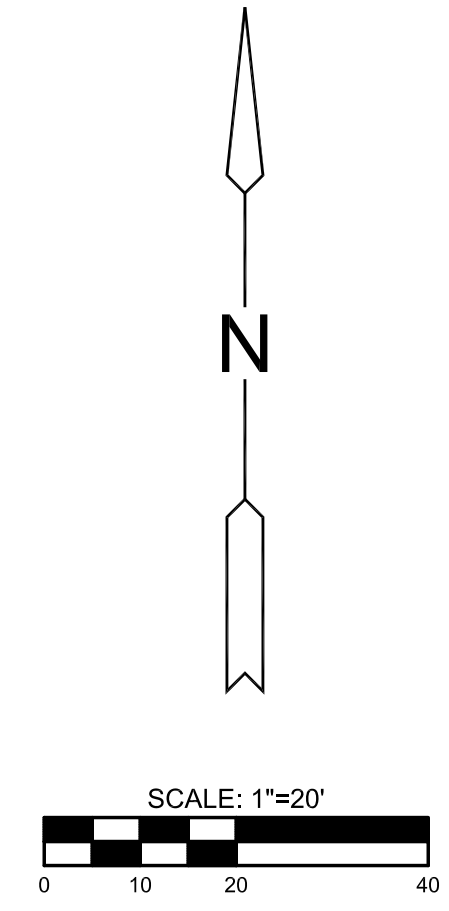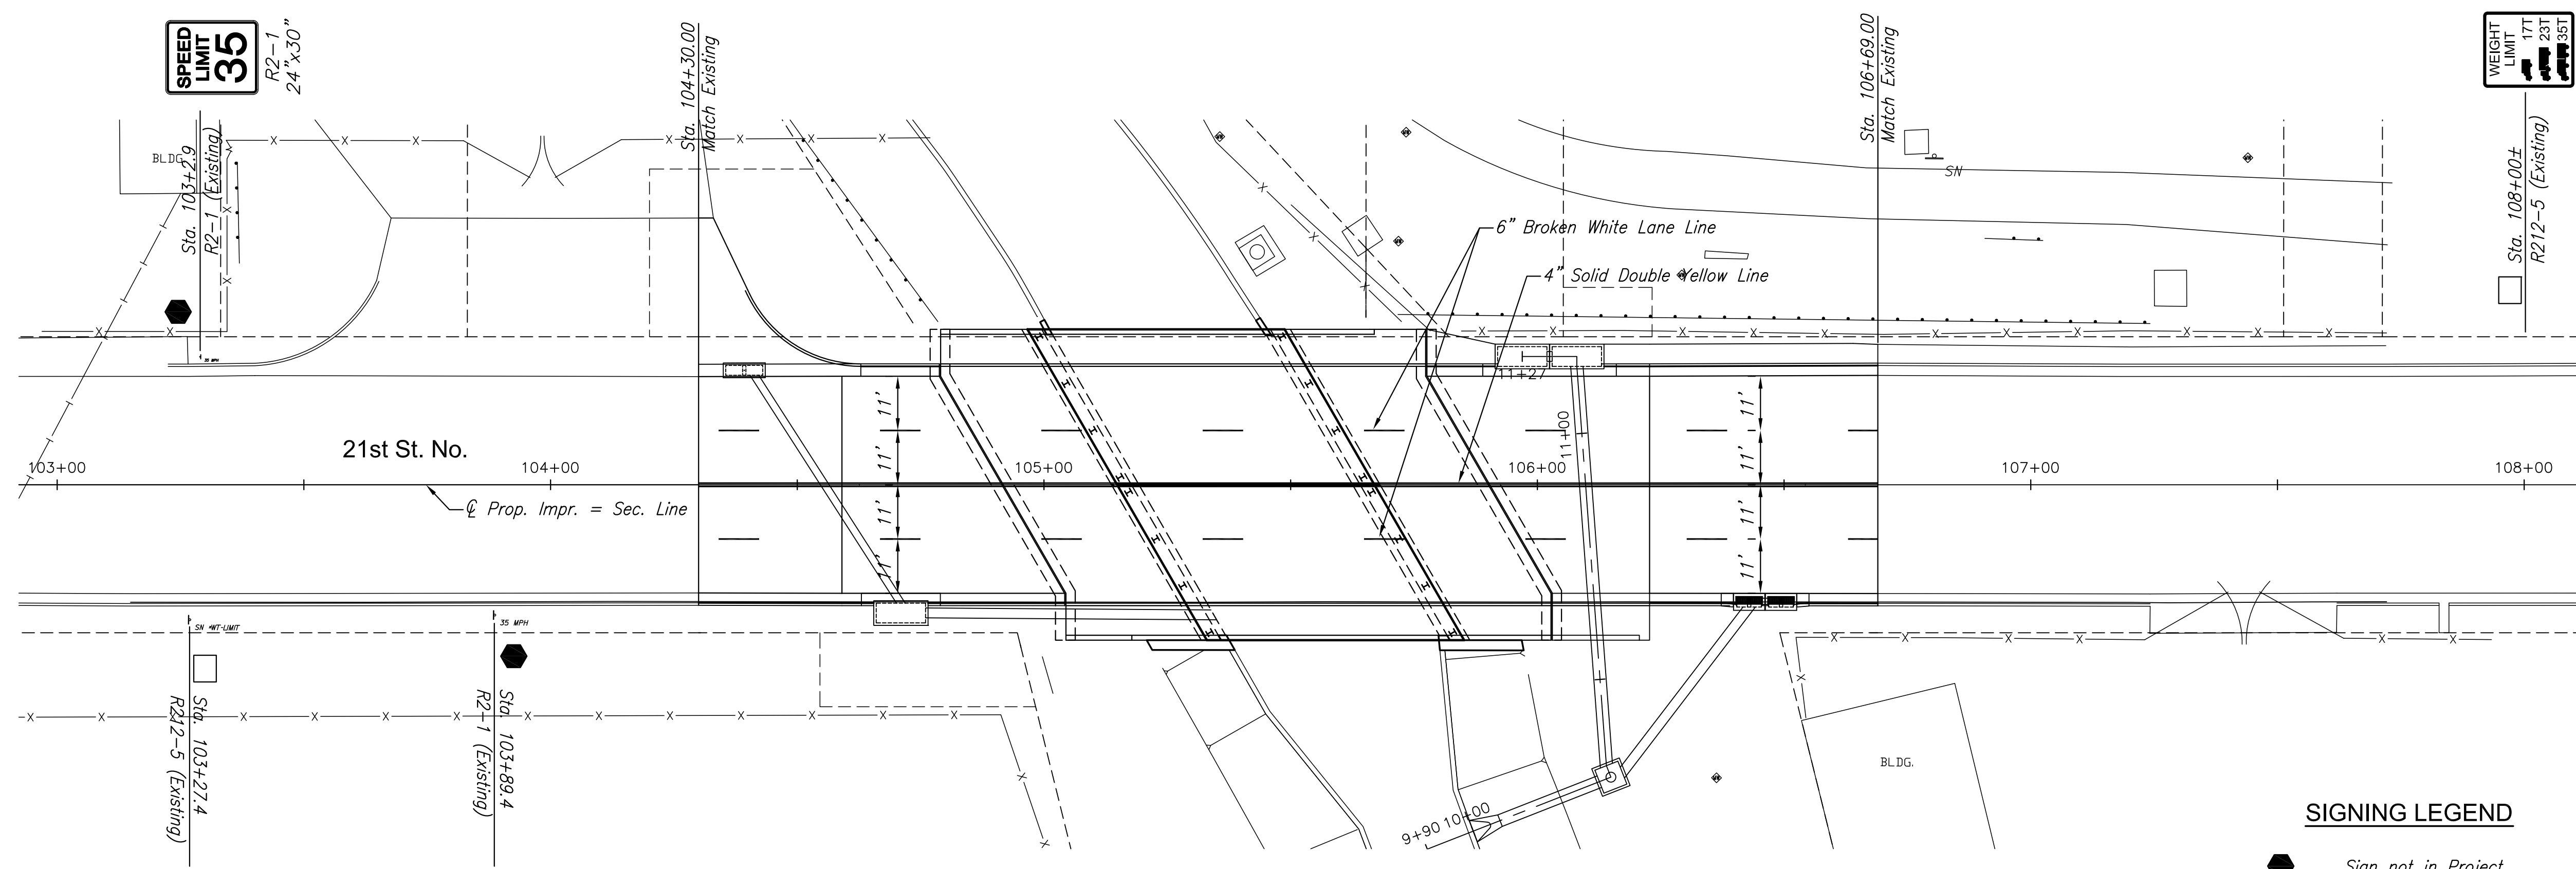


- SIGNING LEGEND**
- Sign not in Project
  - Remove sign and post and deliver to City of Wichita

*Note:*  
 Existing pavement markings removed for temporary traffic control purposes shall be replaced, in kind, on 21st Street. Quantities for this are reflected in the Summary of Quantities.


*Pavement Markings* - All pavement markings shall be epoxy, unless otherwise approved by the Engineer. Pavement markings shall be installed per manufacturer's recommendations and shall meet KDOT's 2007 Edition of the Standard Specification Section 806. Full traffic may not be restored (and substantial project completion achieved) until all pavement markings are in place. Should construction timing be such that restoration of traffic becomes necessary during temperatures prohibiting the installation of permanent markings, the contractor shall install and maintain temporary markings until such time that permanent markings may be properly installed. Except for the material requirement, temporary pavement markings shall be placed equivalent, in every manner (i.e. dimension, frequency, spacing, etc.), to the permanent marking layout. The cost for temporary pavement markings will not be paid for directly, but shall be considered *subsidiary* to the bid item for "Pavement Markings".

SUMMARY OF QUANTITIES (FOR INFORMATION ONLY)		
ITEMS	QUANTITY	UNIT
Pavement Marking (White)(6")	504	L.F.
Pavement Marking (Yellow)(4")	1920	L.F.
Sign, Existing, Removed	2	EA.

RECAPITULATION OF QUANTITIES		
BID ITEM	QUANTITY	UNIT
Pavement Marking	Lump Sum	L.S.
Sign, Existing, Removed	2	EA.

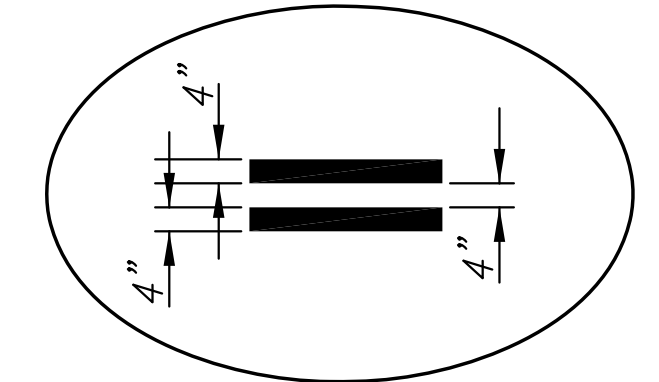

TYPICAL SPACING FOR 4" DOUBLE YELLOW LINE

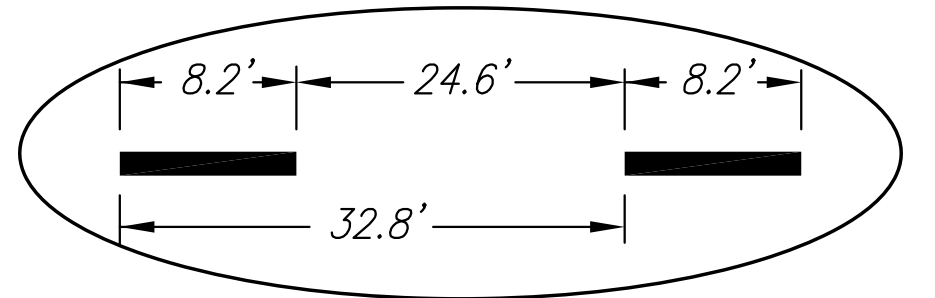

TYPICAL SPACING FOR 6" BROKEN WHITE LANE LINES AND 4" BROKEN YELLOW LINES

PLOT FILE: Thursday, July 23, 2015 @ 10:22AM  
 J:\Projects\2015\1301046566\_21st Bridge at Derby Refinery\2015\Plan\13046566.dwg