


Match Line Sta. 11+25

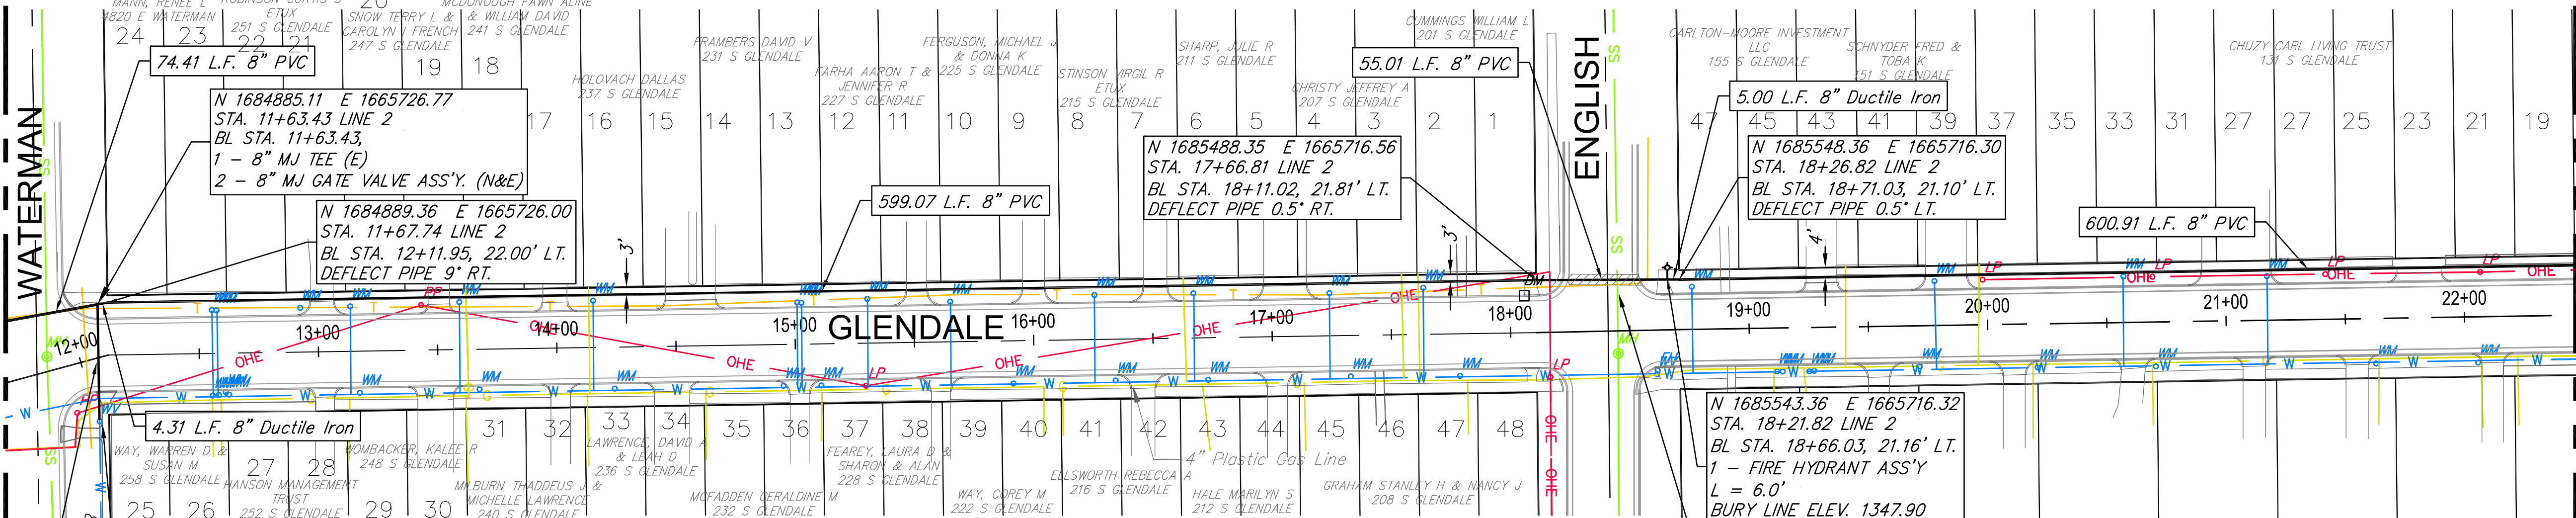

Match Line Sta. 22+00

WATER METER SUMMARY


BL Station	Lt./Rt.	Service (Long or Short)	Address	AS BUILT	BL Station	Lt./Rt.	Service (Long or Short)	Address	AS BUILT
12+55	Rt.	Long			16+34	Rt.	Long		
12+56	Lt.	Short			16+66	Lt.	Short		
12+57	Lt.	Short			16+73	Rt.	Long		
12+58	Rt.	Long			17+23	Lt.	Short		
12+61	Rt.	Long			17+33	Rt.	Long		
12+63	Rt.	Long			17+63	Lt.	Short		
12+93	Lt.	Short			17+79	Rt.	Long		
13+13	Lt.	Short			18+76	Lt.	Short		
13+17	Rt.	Long			19+11	Rt.	Long		
13+59	Lt.	Short			19+13	Rt.	Long		
13+67	Rt.	Long			19+24	Rt.	Long		
14+16	Lt.	Short			19+27	Rt.	Long		
14+24	Rt.	Long			19+71	Rt.	Long		
14+95	Rt.	Long			19+78	Lt.	Short		
15+00	Lt.	Short			20+21	Rt.	Long		
15+03	Lt.	Short			20+56	Lt.	Short		
15+11	Rt.	Long			20+70	Rt.	Long		
15+30	Lt.	Short			21+17	Lt.	Short		
15+64	Lt.	Short			21+63	Rt.	Long		
15+91	Rt.	Long			22+05	Rt.	Long		
16+25	Lt.	Short			22+54	Rt.	Long		

49.00 L.F. 8" PIPE


N 1684886.03 E 1665775.67
STA. 11+55.61 LINE 2
BL STA. 12+01.16, 25.77' RT.
REMOVE EXIST. VALVE
CONNECT TO EXISTING LINE

N 1685543.36 E 1665716.32
STA. 18+21.82 LINE 2
BL STA. 18+66.03, 21.16' LT.
1 - FIRE HYDRANT ASS'Y
L = 6.0'
BURY LINE ELEV. 1347.90
VALVE BOX ELEV. 1348.00

SANITARY SEWER TO BE CONCRETE ENCASED
WHEN WATER MAIN IS CONSTRUCTED WITHIN
10' HORIZONTAL OR 2' VERTICALLY PER
KDHE SPECIFICATIONS.

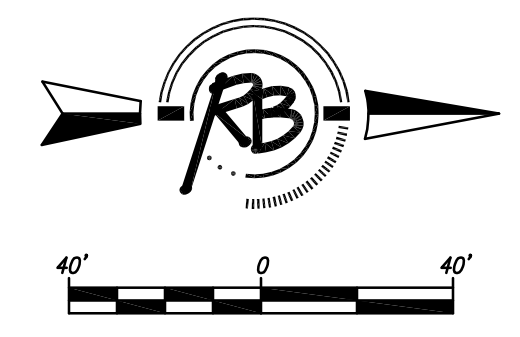

Existing Pavement, Curb and Gutter to be Removed and Replaced as necessary for construction. No additional pay shall be made for this work, Subsidiary to other pay items.

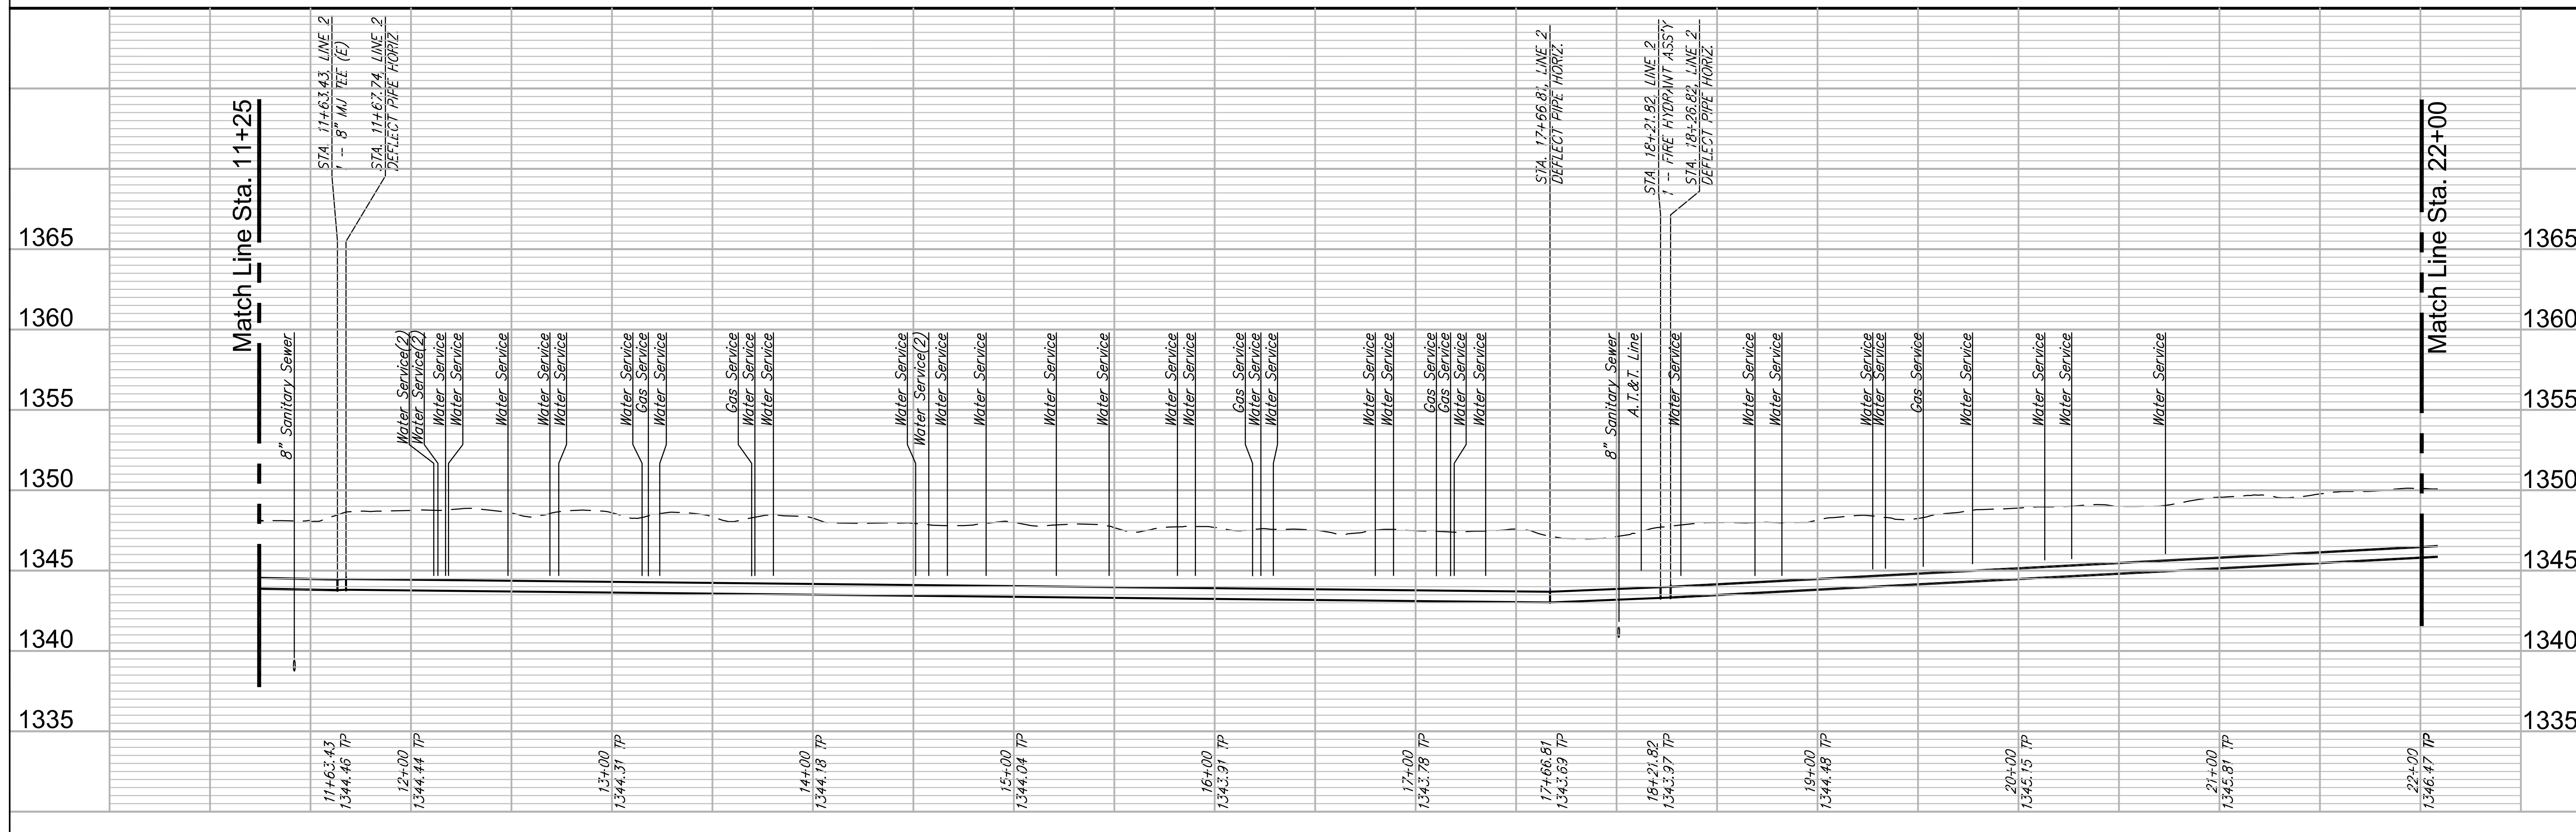

Match Line Sta. 11+25

Match Line Sta. 22+00

**WATER MAIN REPLACEMENT
GLENDALE - LINE 2**
Wichita, Kansas

PROJECT NUMBER 448-90611	REGION RA / EUG	REVIEW DATE 01/07/2015
DRAWING FILE	DESIGNER RA / DRS	DATE 09/29/2015

RB JOB 4227VV
SHEET 40