


PLOTTER: Wednesday, May 04, 2016 @ 09:57AM

SUBDIVISION BENCH MARKS				
NO.	STREET AND STATION	FROM CL	DESCRIPTION	ELEVATIONS
1	STEEPLECHASE CIRCLE, STA. 9+64.6	2.5' RT	TOP OF CURB AT S END OF INLET HOOKUP	

NOTE: CONTRACTOR SHALL INSTALL SUBDIVISION BENCH MARKS ("FLAT SURVEY MARKERS NO. 8134-08 3" TOP DIAMETER" PROVIDED BY KANSAS BLUE PRINT CO., INC.) COSTS TO BE CONSIDERED SUBSIDIARY TO CONSTRUCTION OF COMBINED CURB AND GUTTER.

NOTE: CONTRACTOR SHALL PUSH EXISTING DEBRIS & EXCESS DIRT PILES THAT MAY BE IN THE WAY OF THE PROPOSED STREET IMPROVEMENTS INTO NEAT SEPARATE PILES BEYOND THE RIGHT OF WAY & CLEAR OF EASEMENTS. COST SUBSIDIARY TO PROJECT.

BORROW FOR COMPACTED FILL MAY BE TAKEN FROM DIRT STOCKPILES. CONTRACTOR SHALL TAKE CARE THAT ON-SITE BORROW USED FOR PROJECT FILL IS FREE OF RUBBLE.

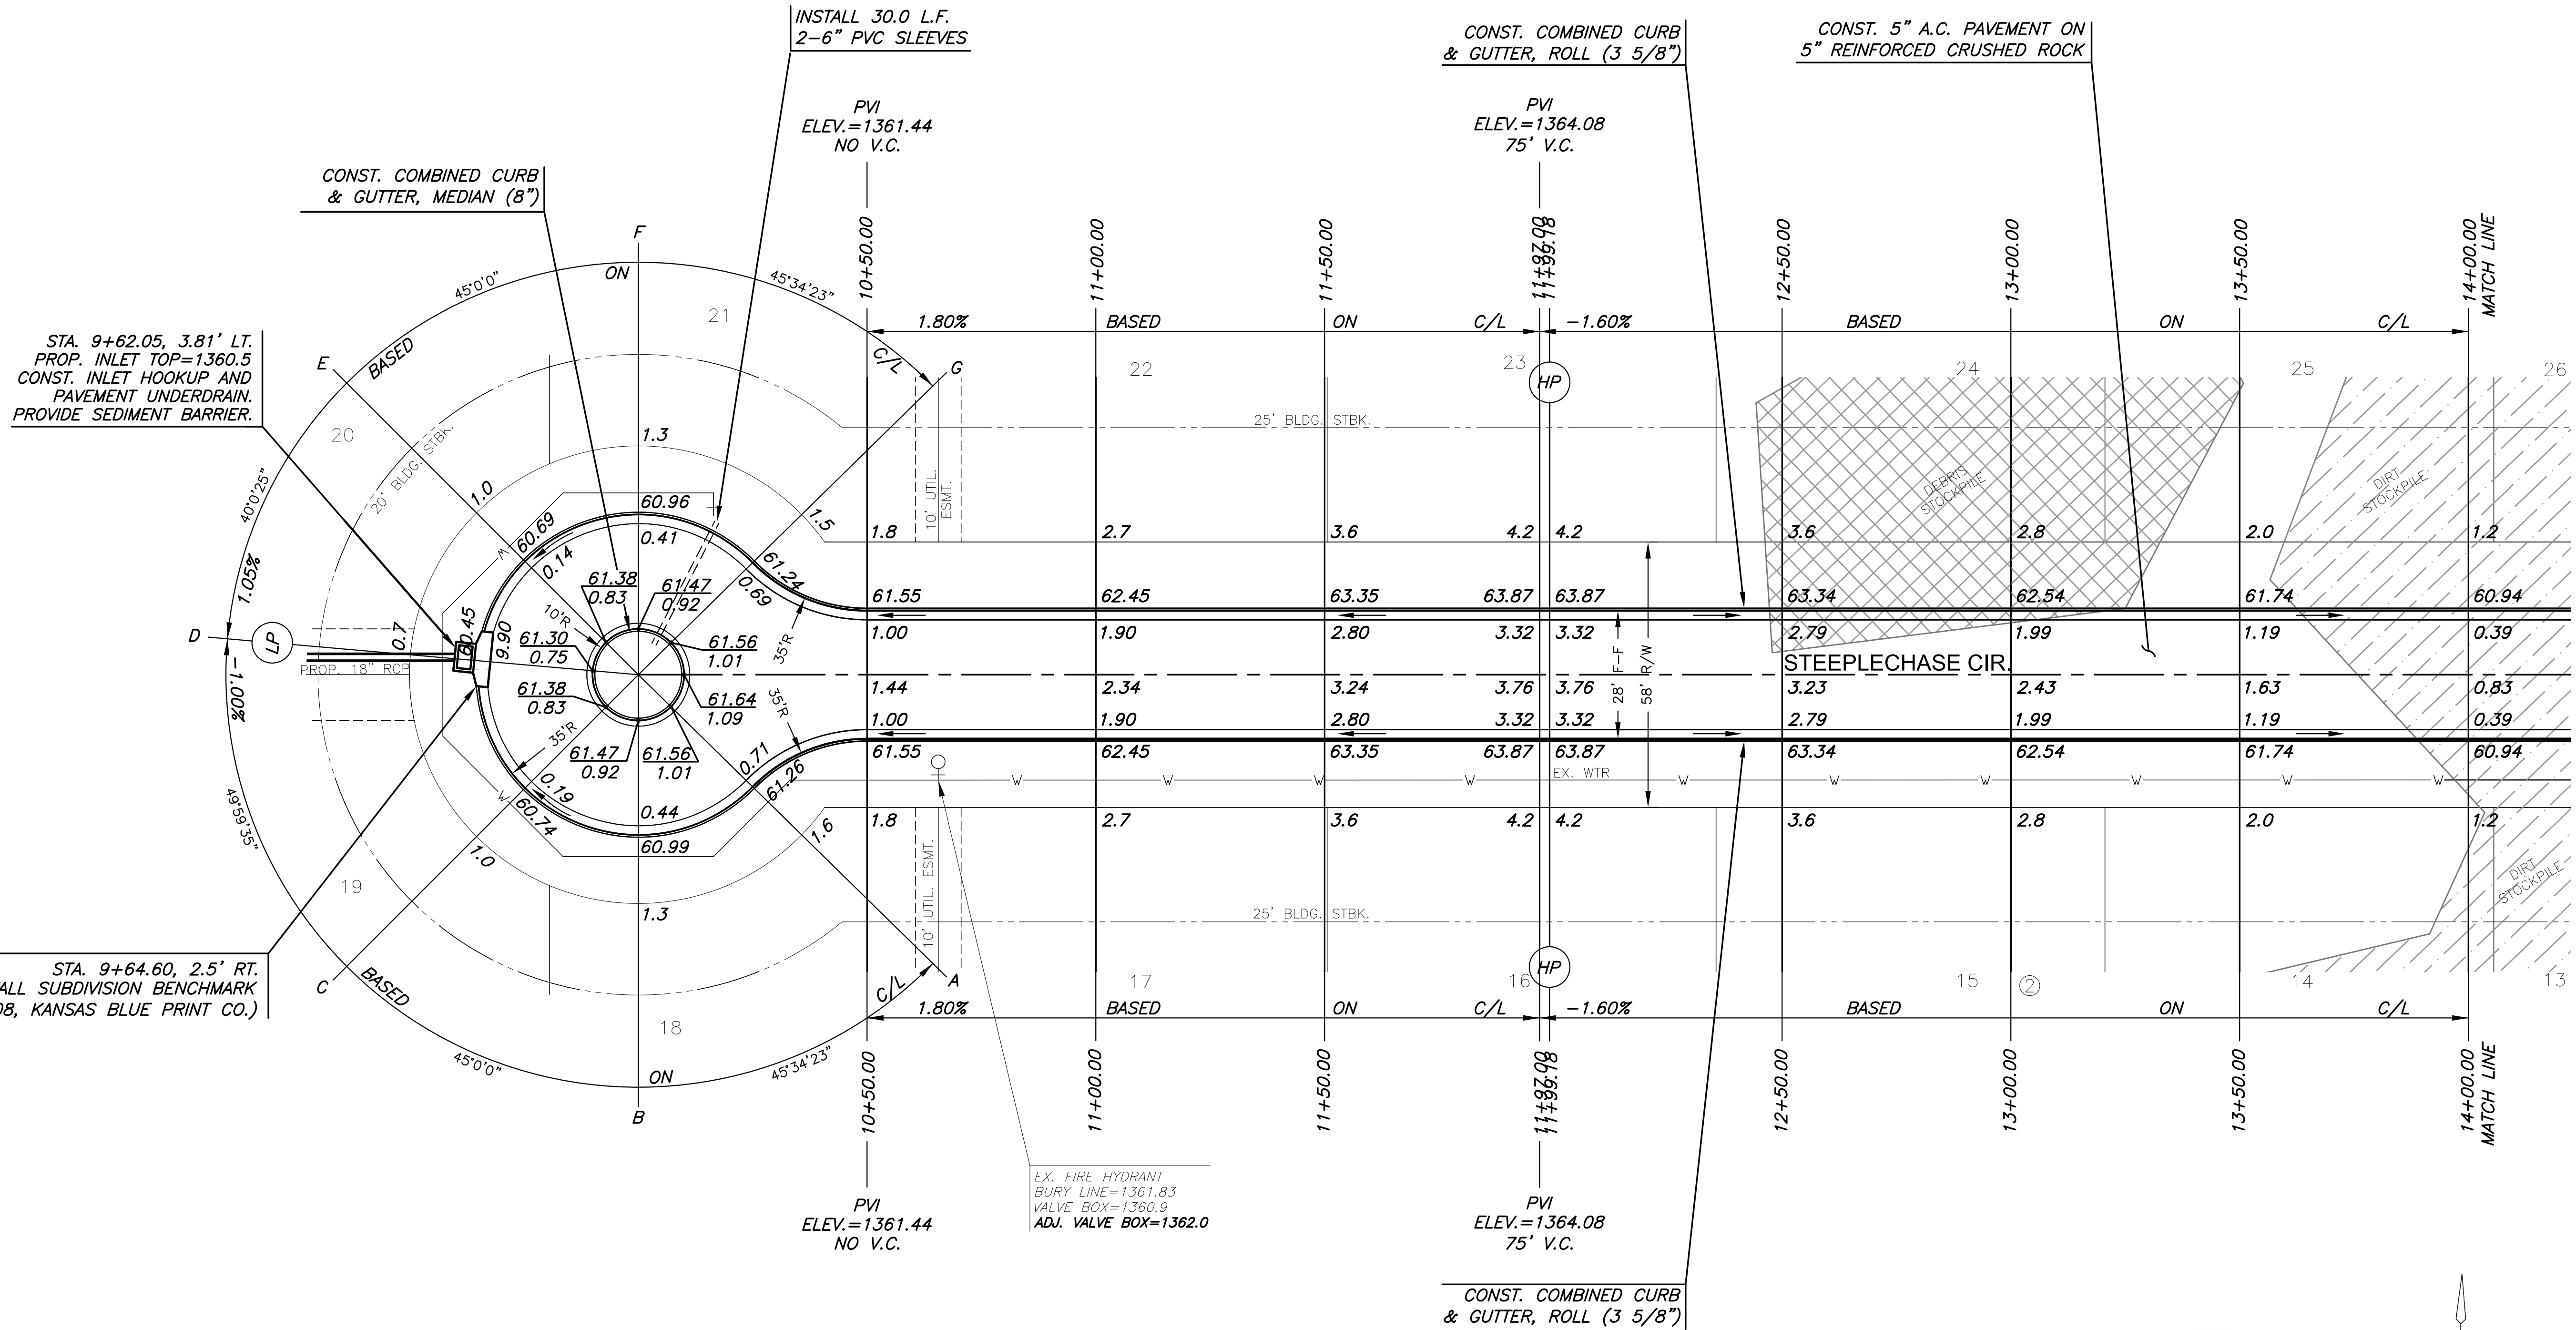

STA. 9+62.05, 3.81' LT. PROP. INLET TOP=1360.5 CONST. INLET HOOKUP AND PAVEMENT UNDERDRAIN. PROVIDE SEDIMENT BARRIER.

STA. 9+64.60, 2.5' RT. INSTALL SUBDIVISION BENCHMARK (NO. 8134-08, KANSAS BLUE PRINT CO.)

PAVING & INCIDENTAL DRAINAGE FOR
KRUG SOUTH ADDITION
 PHASE 5


©2016 MKEC Engineering All Rights Reserved www.mkec.com
 These drawings and their contents, including, but not limited to, all concepts, designs, & ideas are the exclusive property of MKEC Engineering (MKEC), and may not be used or reproduced in any way without the express consent of MKEC.

STEEPLECHASE CIR. PAVING

PROJECT NO.	472-85058
DATE	APRIL 2016
SCALE	1"=20'
DESIGNED	DFL
DRAWN	BKS
CHECKED	GJA

NO.	REVISION	DATE

SHEET NO.

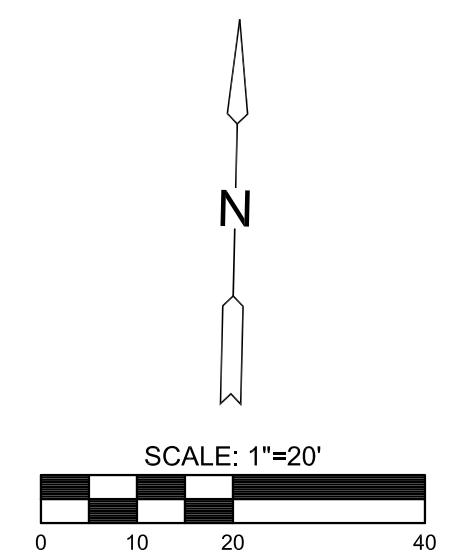

J:\CIVIL\05281\DWG\CIVIL\3D\5-CIVIL\CAD\PAVPHASE 5\05281 PAV PH5.DWG