


Aster ST – Sunflower DR CY Excavation (unadjusted)				Aster ST – Sunflower DR CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total
7+19.64	12.96	0.00	0.00	7+19.64	10.85	0.00	0.00
7+50	12.96	14.58	14.58	7+50	10.85	12.20	12.20
8+00	12.96	24.01	38.58	8+00	10.85	20.09	32.29
8+37.78	12.96	18.14	56.72	8+37.78	10.84	15.17	47.47
8+64.52	19.44	16.68	73.39	8+64.52	5.43	7.59	55.06
8+90.13	12.96	16.09	89.48	8+90.13	10.83	7.20	62.26
9+00	12.96	4.74	94.22	9+00	10.85	3.96	66.22
9+50	12.96	24.01	118.22	9+50	10.85	20.09	86.31
10+00	12.96	24.01	142.23	10+00	10.85	20.09	106.41
10+50	12.96	24.01	166.24	10+50	10.85	20.09	126.50
11+00	12.96	24.01	190.24	11+00	10.85	20.09	146.60
11+36.84	20.73	22.98	213.23	11+36.84	5.43	11.10	157.70
11+70.75	12.74	21.01	234.24	11+70.75	11.51	10.63	168.34
12+00	12.96	13.92	248.16	12+00	10.85	12.14	180.47
12+50	12.96	24.01	272.16	12+50	10.85	20.09	200.57
12+93.15	24.80	30.18	302.35	12+93.15	4.53	12.28	212.84
13+01.85	27.10	8.35	310.70	13+01.85	5.07	1.54	214.39

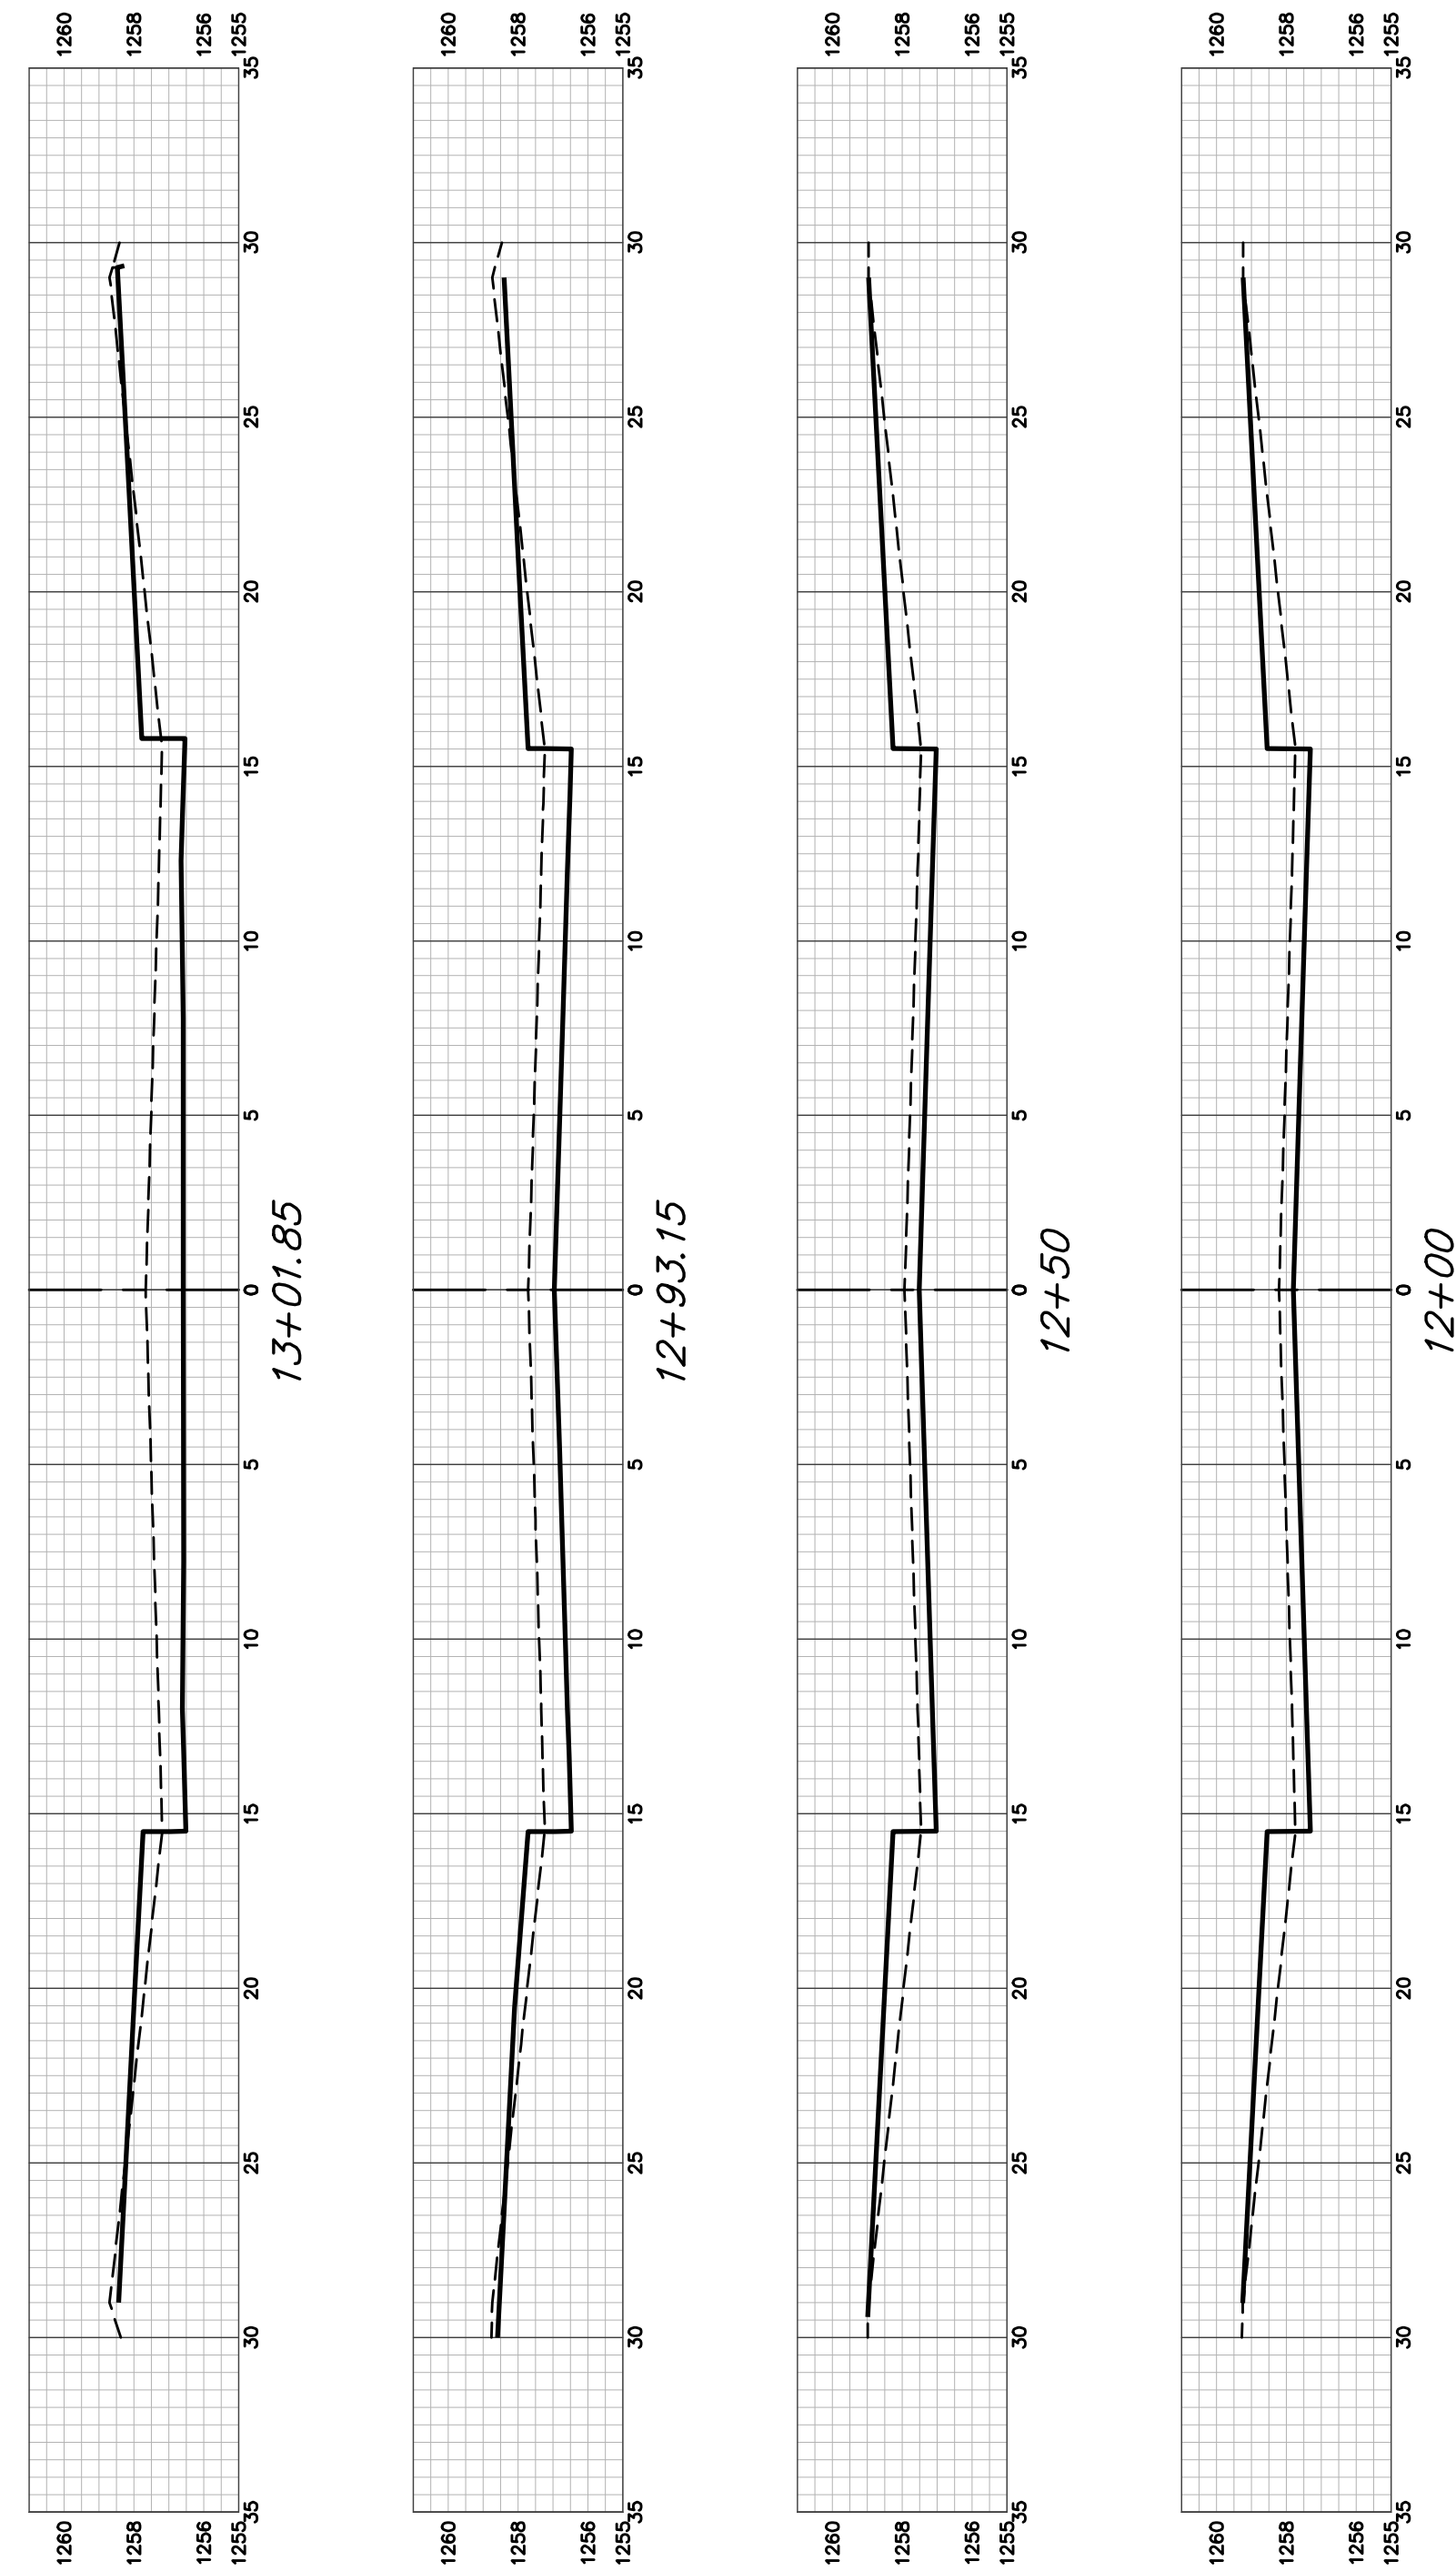

SUNFLOWER DR