
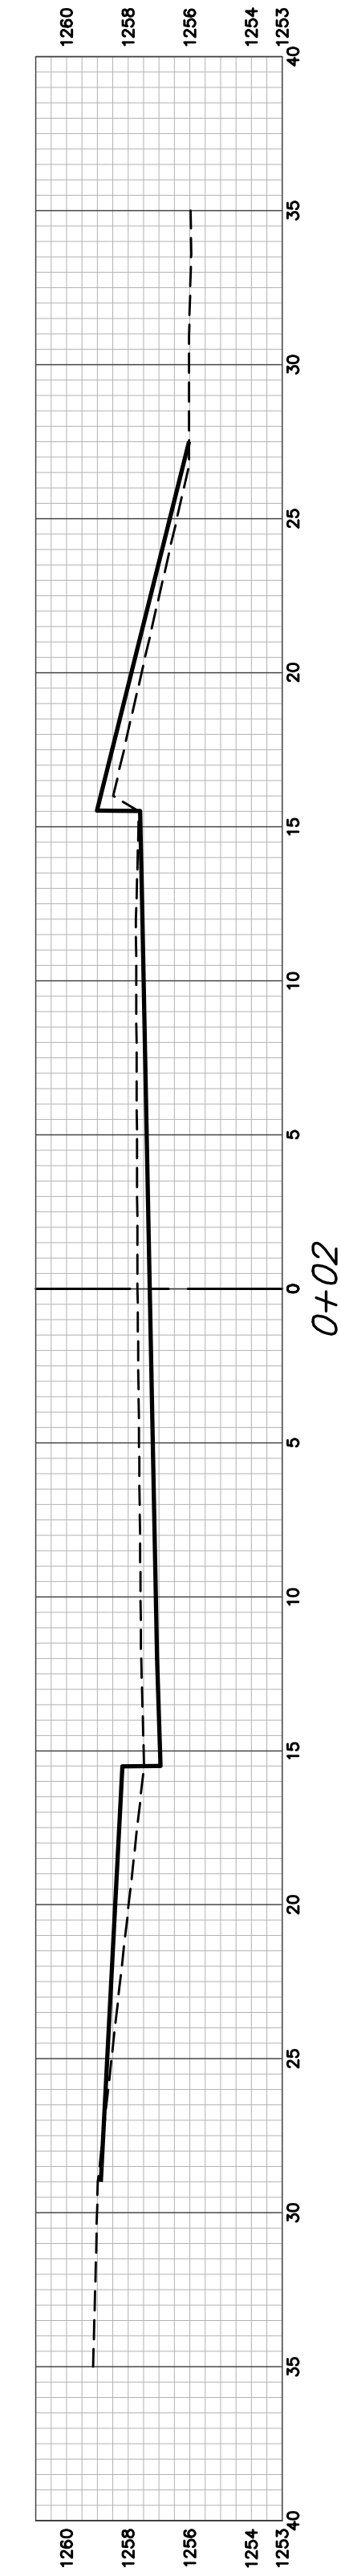
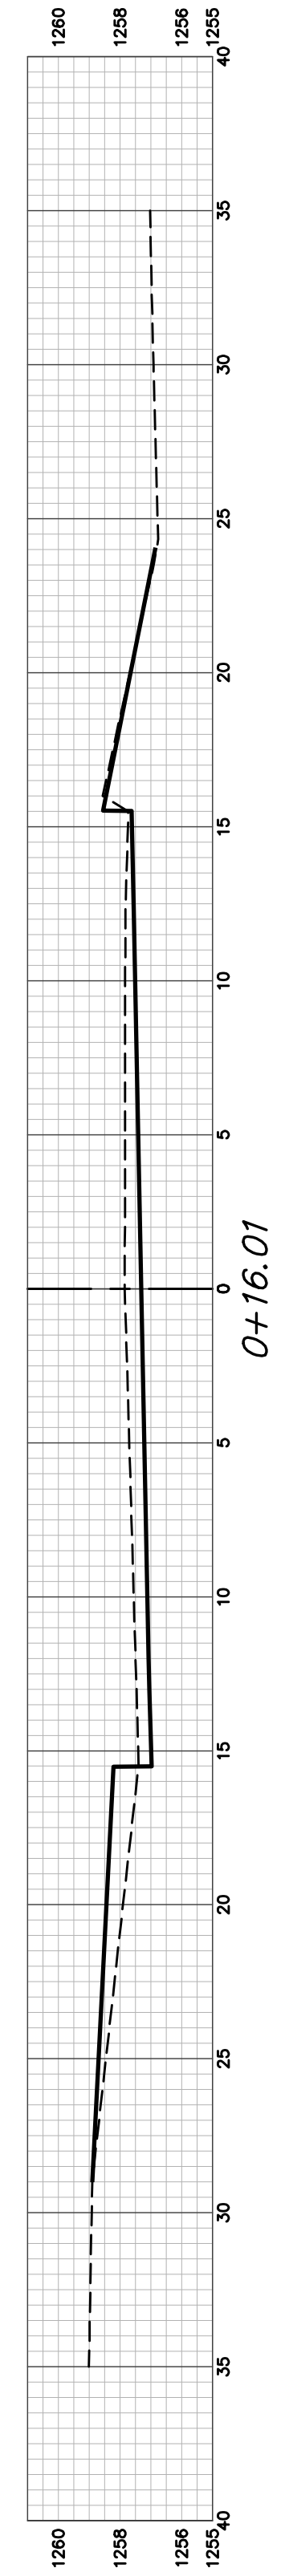
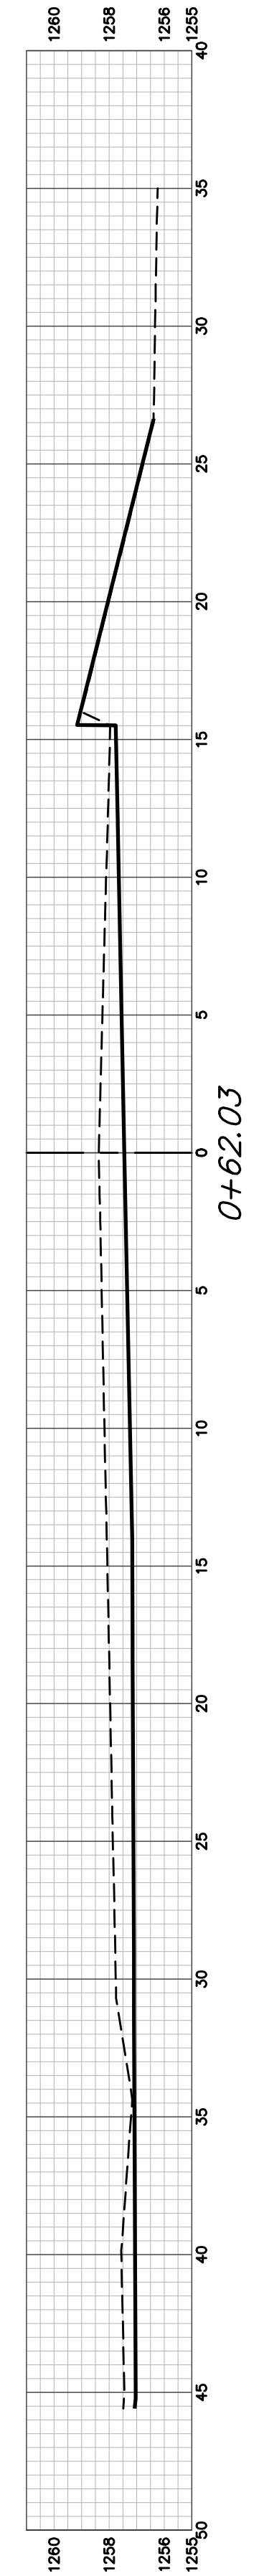
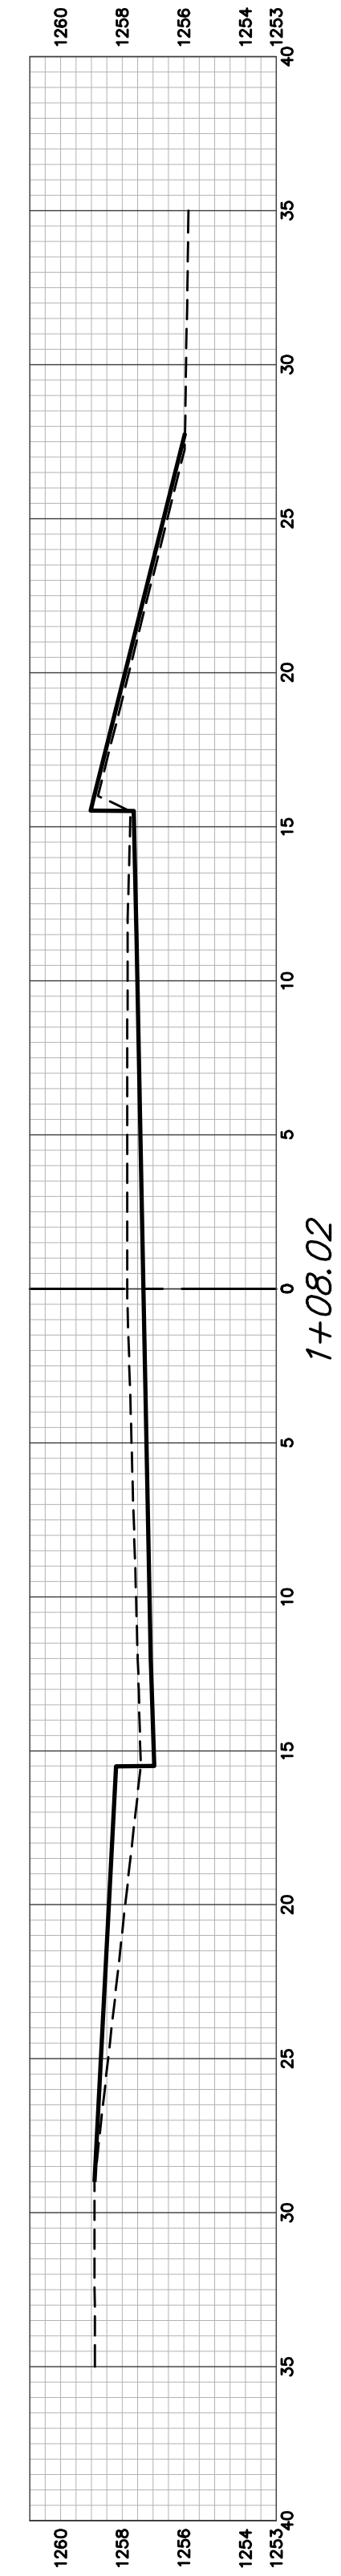


| Vassar Hammer Head CY Excavation (unadjusted) | | | | Vassar Hammer Head CY Loose Fill (unadjusted) | | | |
|--|-------|--------|--------|--|------|--------|-------|
| Station | Area | Volume | Total | Station | Area | Volume | Total |
| 0+02 | 11.48 | 0.00 | 0.00 | 0+02 | 7.88 | 0.00 | 0.00 |
| 0+16.01 | 13.00 | 6.35 | 6.35 | 0+16.01 | 5.63 | 3.51 | 3.51 |
| 0+62.03 | 40.26 | 45.40 | 51.75 | 0+62.03 | 0.66 | 5.36 | 8.87 |
| 1+08.02 | 12.74 | 45.14 | 96.88 | 1+08.02 | 7.14 | 6.64 | 15.51 |
| 1+22 | 11.47 | 6.27 | 103.15 | 1+22 | 8.06 | 3.93 | 19.44 |

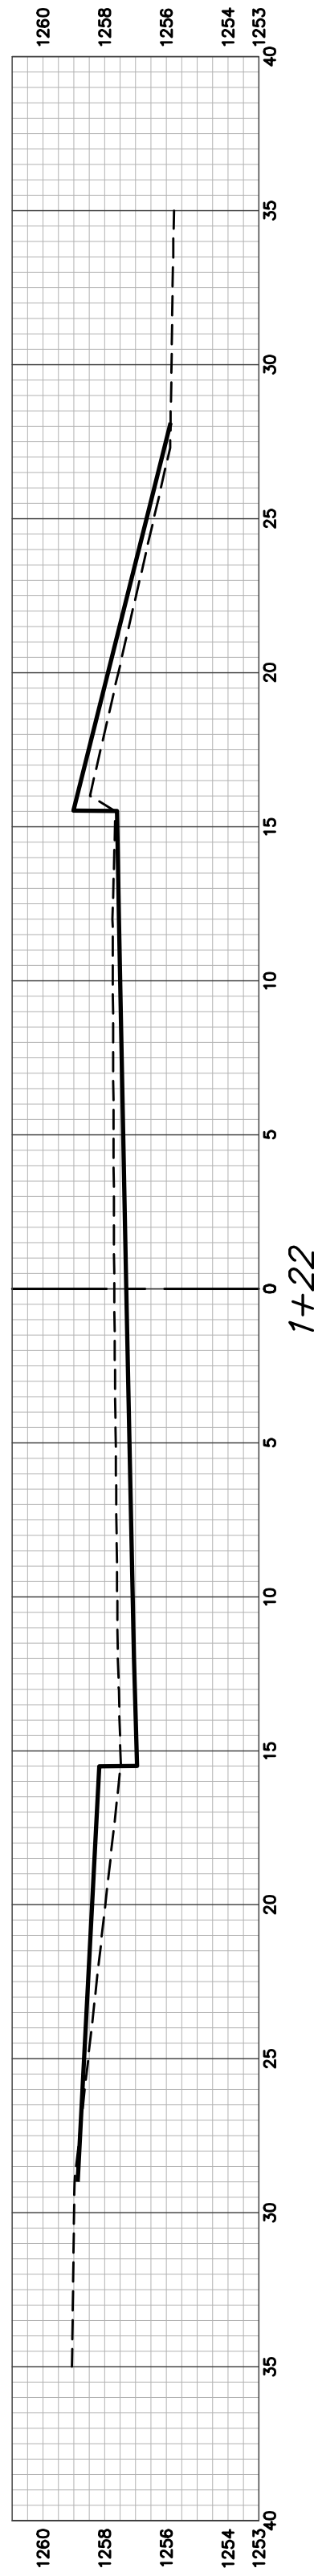

VASSAR AVE