

**TEMPORARY EROSION CONTROL DETAIL FOR SLOPE PROTECTION**

THE ENGINEER MAY DETERMINE THAT THE HEIGHT OF BERM SHOULD BE INCREASED OVER THAT SHOWN IF DRAINAGE CONDITIONS ARE PRODUCING SLOPE EROSION.

TEMPORARY EROSION CONTROL BERMS SHALL BE CONSTRUCTED AT LOCATIONS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER.

AT REGULAR INTERVALS OF NO GREATER THAN 250 FT, AND WHERE FLOW IS CONCENTRATED, SUCH AS THE CORNERS OF THE POND, OR AS DIRECTED BY THE ENGINEER, AND AS PER PLANS DEPICT PROVIDE BREAKS IN THE BERM TO ALLOW CONTROLLED DISCHARGE OF TRAPPED WATER. DISCHARGE LOCATIONS SHALL BE PROTECTED AS NECESSARY TO PREVENT SLOPE EROSION. SEE TYPICAL SECTION.

ALL AREAS WHERE FLOW IS CONCENTRATED SHALL BE PROTECTED BY SILTATION BARRIERS PRIOR TO DISCHARGING INTO ANY DITCH, STORM SEWER, OR WATERCOURSE, AS APPROVED BY THE ENGINEER.

MEASUREMENT AND PAYMENT: THIS WORK SHALL NOT BE PAID FOR DIRECTLY BUT SHALL BE CONSIDERED SUBSIDIARY TO "UNCLASSIFIED EXCAVATION".

**POND SEALING NOTES:**


THE POND AREAS INDICATED FOR CLAY LINER SHALL BE OVEREXCAVATED TO A DEPTH OF ONE FOOT BELOW THE FINAL POND SURFACE. THE OVEREXCAVATED MATERIAL SHALL BE STOCKPILED FOR RE-USE, UTILIZED IN PROJECT EMBANKMENTS, OR STOCKPILED ON SITE. BACKFILL OVEREXCAVATED AREA WITH PROJECT AREA CLAY MATERIAL AND COMPACTED TO PROVIDE AN IMPERVIOUS SURFACE. NO SHALE PERMITTED IN THIS ZONE. PROVIDE QUALITY CONTROL TESTING AS OUTLINED IN THE GEOTECHNICAL REPORT.

POND SEALING, AS DESCRIBED HEREIN, SHALL BE MEASURED AND PAID FOR AS FOLLOWS: THE OVEREXCAVATION WILL BE PAID FOR UNDER THE LUMP SUM BID ITEM "POND SEALING". THIS SHALL BE CONSIDERED FULL COMPENSATION FOR ALL OVEREXCAVATION, STOCKPILING, AND DOUBLE HANDLING OF EARTHWORK (IF NECESSARY).

REQUIRED PHYSICAL PROPERTIES OF CLAY LINER MATERIAL		
PROPERTY	TEST METHOD	TEST VALUE
MIN. % PASSING #200 SIEVE	ASTM D1140	80
MIN. LIQUID LIMIT	ASTM D4318	40
MIN. PLASTICITY INDEX	ASTM D4318	25

**POND GRADING NOTES:**

CONTRACTOR SHALL PERFORM GRADING AS SHOWN BY CONTOURS AND COORDINATES ON SHEET NOS. 3 AND 4. EARTHWORK VOLUMES FOR THIS GRADING HAVE BEEN INCLUDED IN THE BID ITEM "UNCLASSIFIED EXCAVATION".

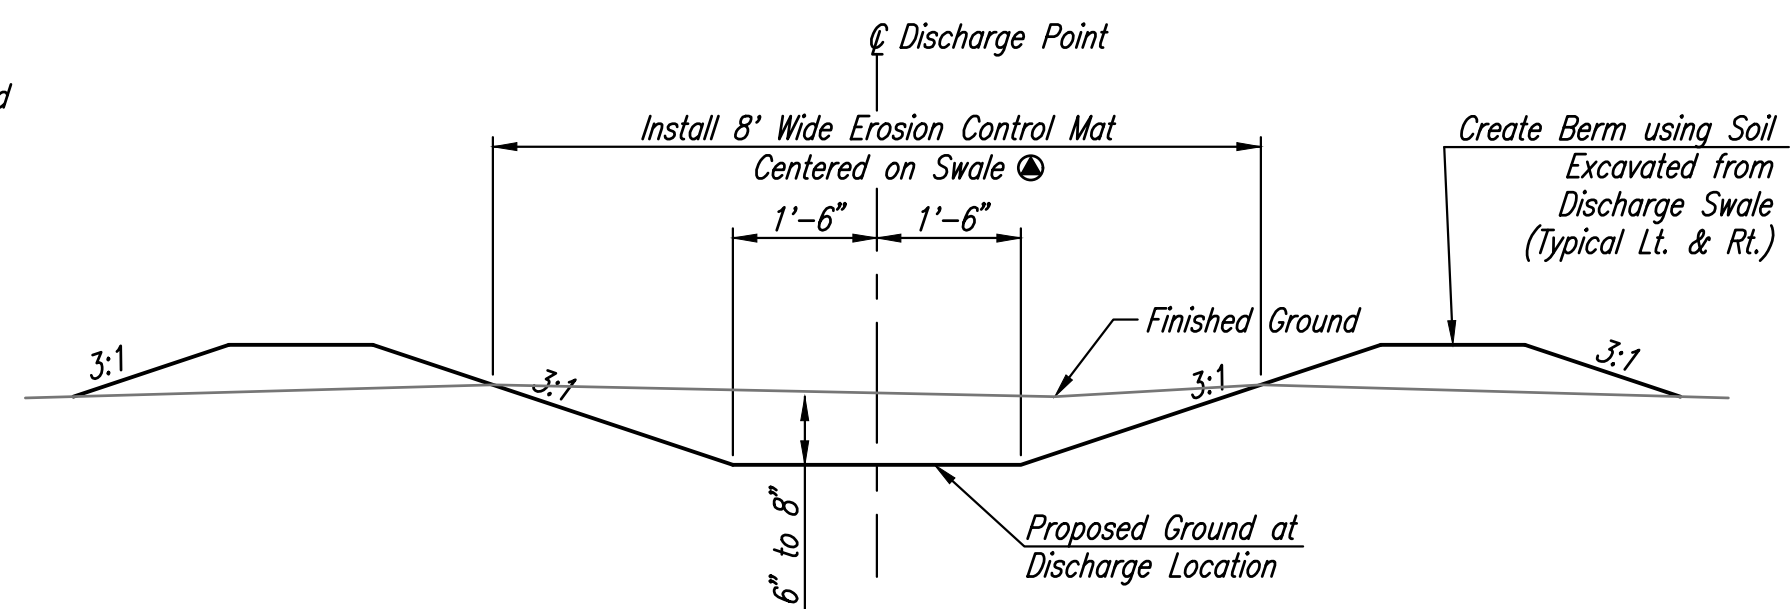


**TYPICAL SECTION**


(Erosion Berm Discharge Point)

Ⓢ EROSION CONTROL MAT SHALL BE NORTH AMERICAN GREEN P300 OR APPROVED EQUIVALENT. INSTALLED PER MANUFACTURER'S RECOMMENDATIONS.


PAID FOR AS S.Y. "EROSION CONTROL MAT" AS INDICATED ON PLANS. THE BID PRICE SHALL BE CONSIDERED FULL COMPENSATION FOR ALL MATERIALS, LABOR, EQUIPMENT, TOOLS, AND INCIDENTS NECESSARY TO COMPLETE WORK.

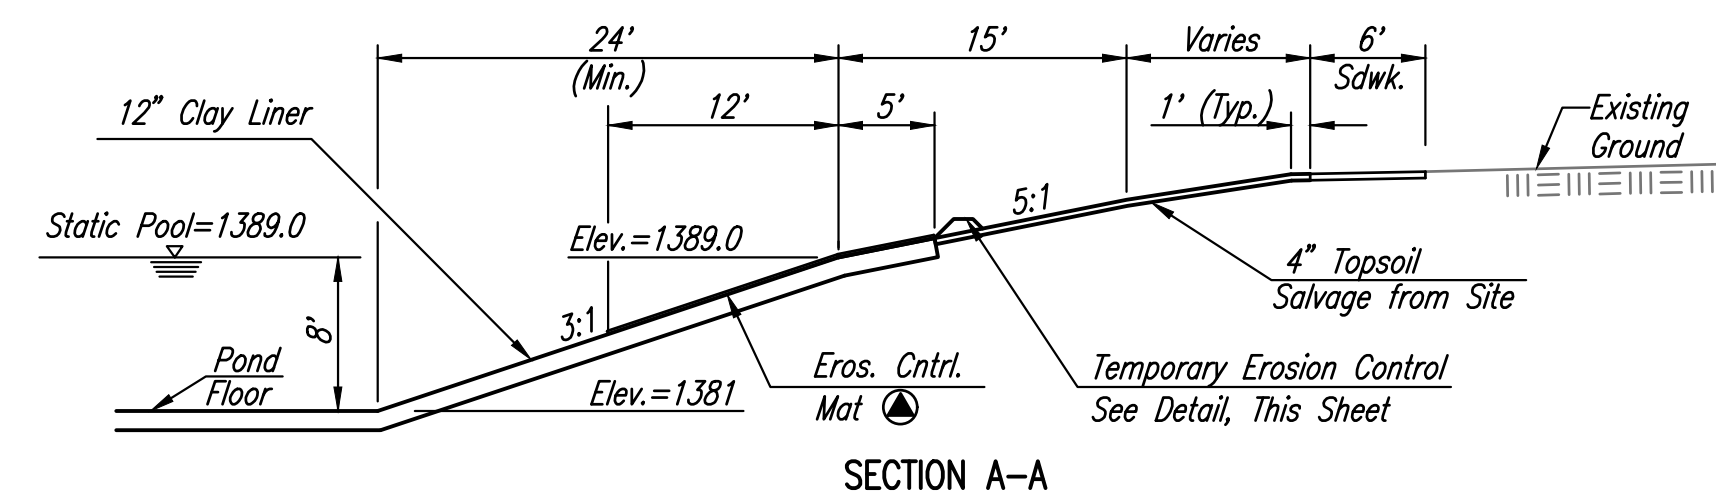


**SECTION A-A**

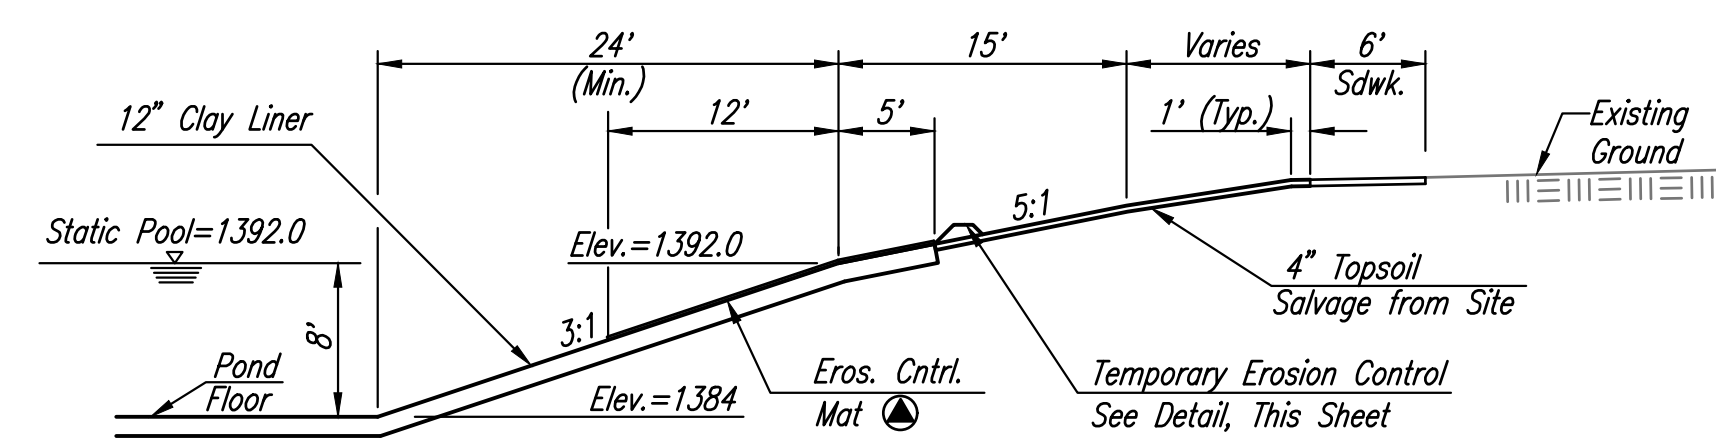

**SECTION B-B**

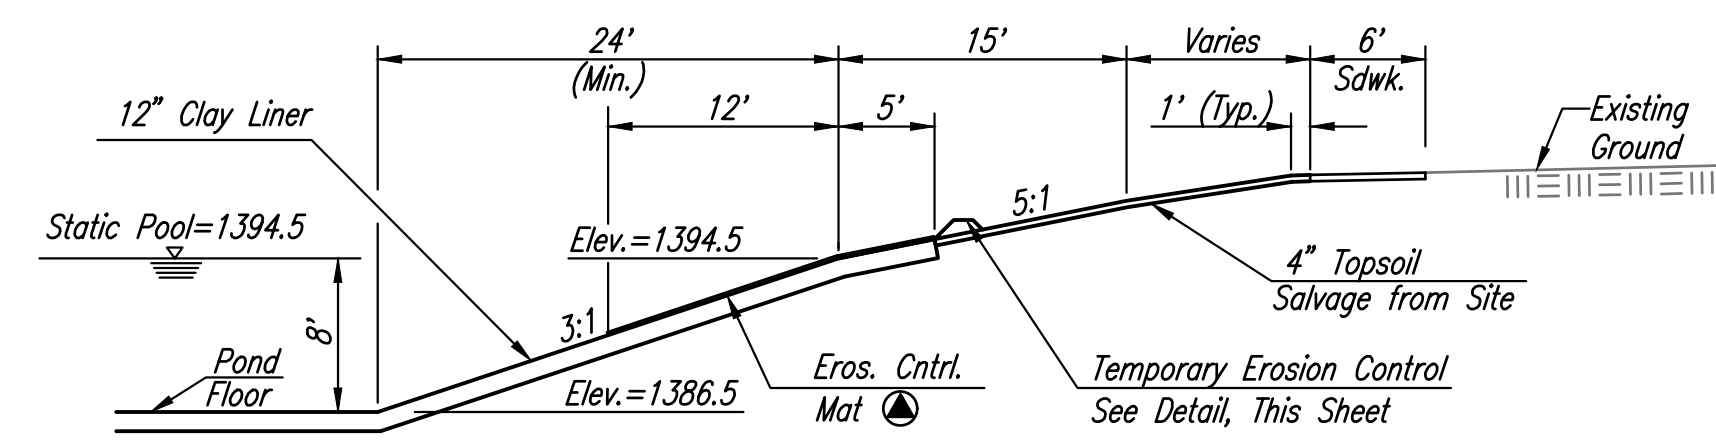

**SECTION C-C**

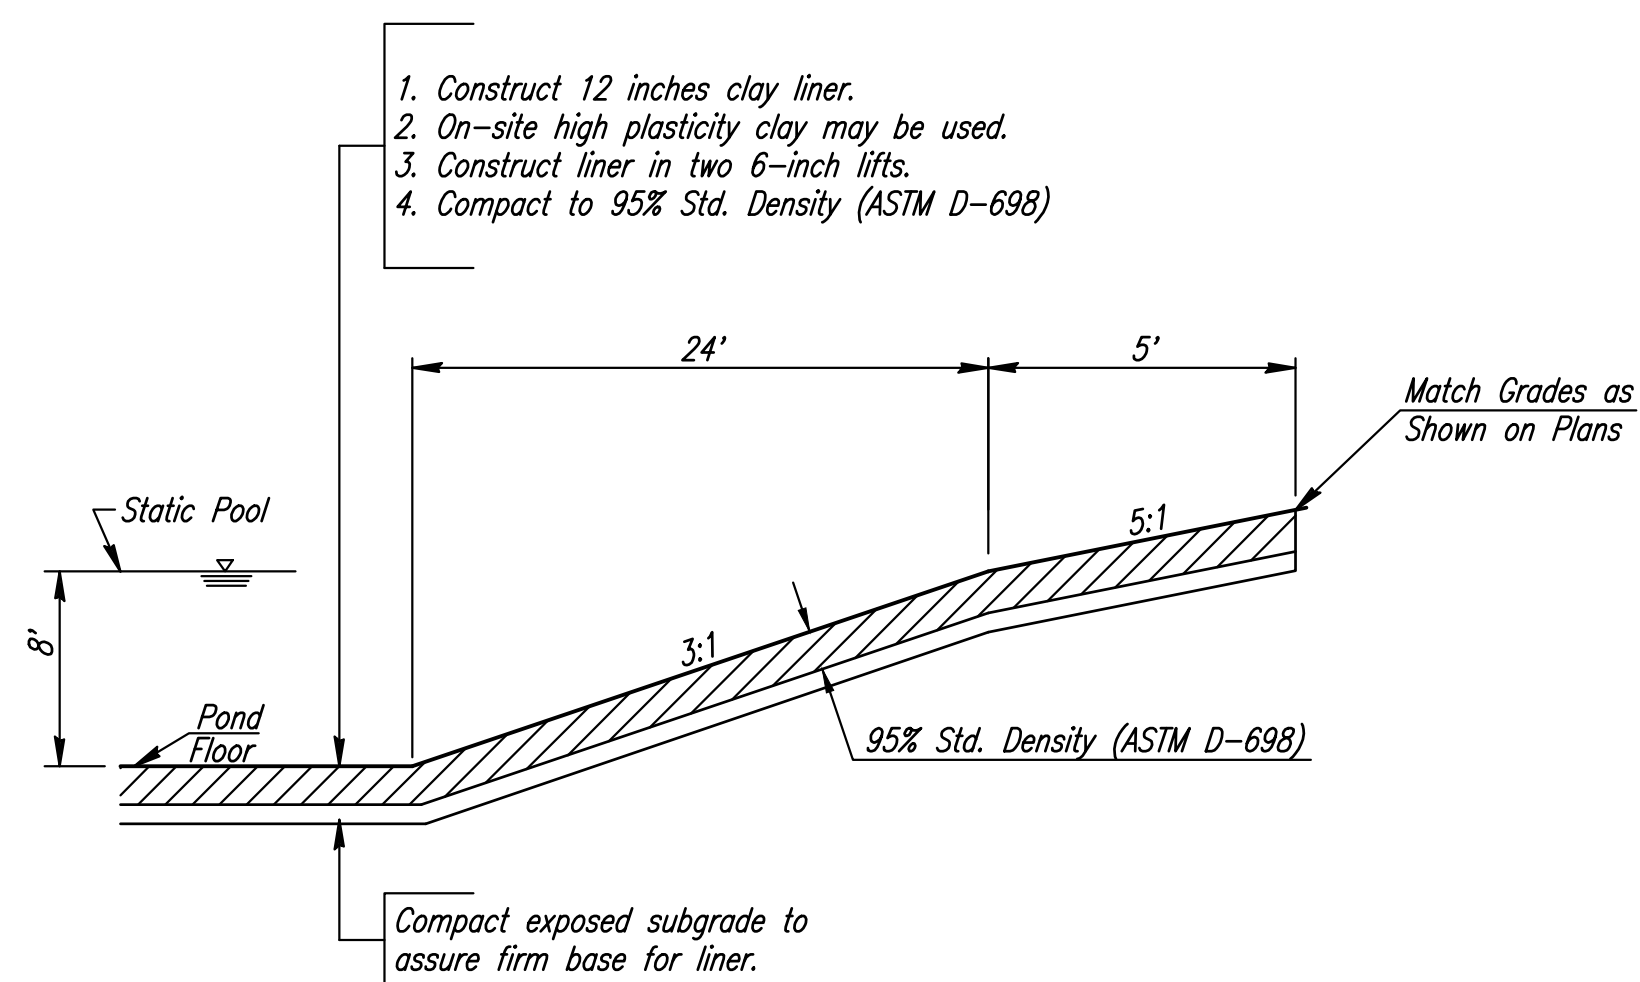

**CLAY LINER CONSTRUCTION PROCEDURE FOR POND SEALING**

SEE RETAINING WALL PLAN SHEET NO. 10.

Scaled 11-29-2016 3:59:33 PM by KIPRIS.DEKAT  
 Plot Scale 1:1 12-06-2016 11:15:12 AM by KIPRIS.DEKAT  
 U:\Wichita-Civil\2015\15627\002\Drawings\15627-002-05C-TYPICAL SECTIONS

	No. _____ Revision _____ By _____ Date _____
	TALLGRASS EAST COMMERCIAL 2ND ADDITION STORM WATER DRAIN NO. 407
	<b>TYPICAL SECTIONS</b> GARY JANZEN, P.E. - CITY ENGINEER CITY OF WICHITA PROJECT NO. 468-85097
	PROFESSIONAL ENGINEERING CONSULTANTS, P.A. 303 SOUTH TOPEKA WICHITA, KS 67202 316-262-2691 www.pec1.com
Designed by JAG, TBK Job No. 31-15627-002 Sht. 05 of 23 Drawn by BJS Date April 2016	