


26TH ST N CY Excavation (unadjusted)				26TH ST N CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total
0+60	20.92	0.00	0.00	0+60	25.23	0.00	0.00
1+00	20.88	30.96	30.96	1+00	26.10	38.02	38.02
1+50	20.94	38.72	69.68	1+50	27.43	49.57	87.59
2+00	21.04	38.87	108.55	2+00	33.60	56.52	144.11
2+50	20.91	38.84	147.39	2+50	37.08	65.45	209.56
3+00	20.95	38.76	186.15	3+00	35.50	67.20	276.75
3+50	21.35	39.17	225.32	3+50	28.79	59.52	336.28
3+75.25	26.79	22.51	247.83	3+75.25	17.04	21.43	357.71
4+12.25	28.87	38.14	285.97	4+12.25	7.76	16.99	374.70
4+49.25	16.49	31.08	317.05	4+49.25	13.27	14.41	389.11
5+00	13.59	28.28	345.33	5+00	13.89	25.62	414.73
5+50	14.11	25.68	371.01	5+50	14.49	26.28	441.01
6+00	20.30	31.43	402.44	6+00	14.50	26.89	467.90
6+50	20.04	36.84	439.28	6+50	14.51	26.89	494.79
7+00	20.51	37.54	476.82	7+00	14.51	26.87	521.66
7+18.52	12.96	11.48	488.30	7+18.52	14.40	9.92	531.58
7+52.52	21.06	21.42	509.72	7+52.52	7.52	13.80	545.38
7+86.52	12.96	21.42	531.15	7+86.52	14.30	13.73	559.11
8+00	12.96	6.47	537.62	8+00	14.54	7.20	566.31
8+50	16.92	27.44	565.06	8+50	14.51	26.94	593.25
9+00	20.28	33.73	598.79	9+00	14.31	26.74	619.99
9+43.95	0.00	16.22	615.01	9+43.95	0.00	11.67	631.66

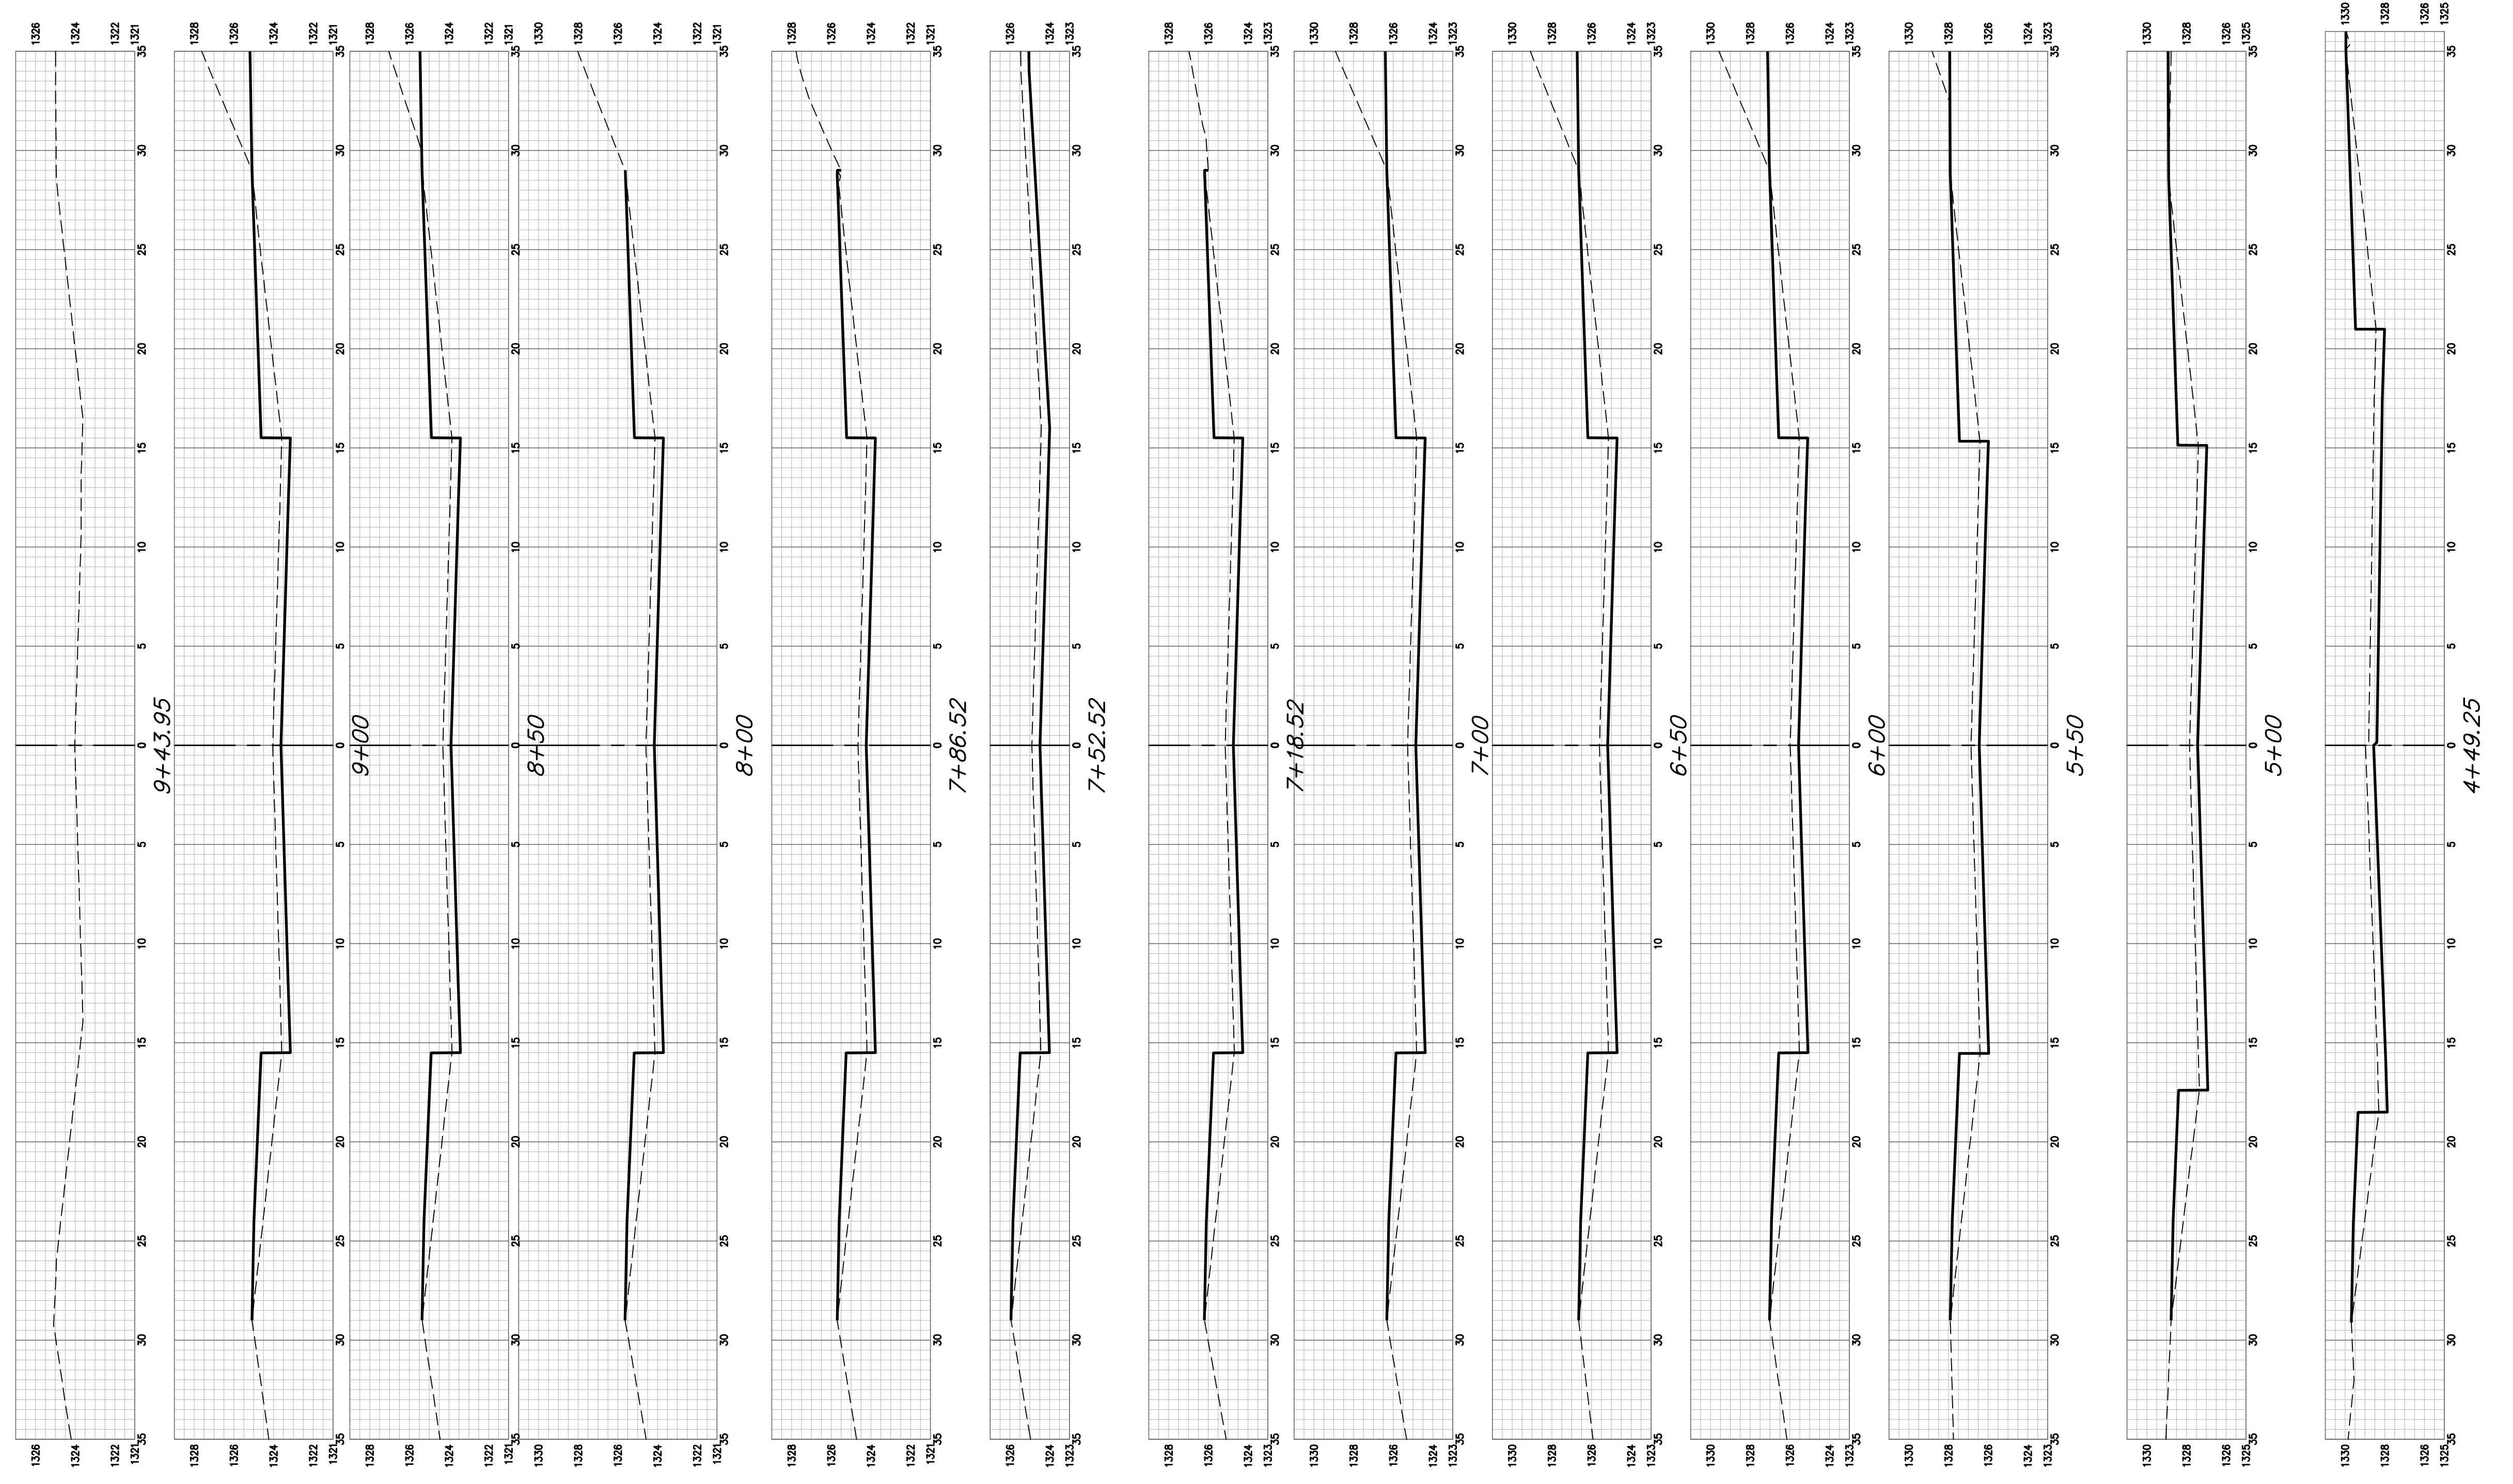

26TH ST NORTH