


Wavecrest Cir CY Excavation (unadjusted)				Wavecrest Cir CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total
-0+50	0.00	0.00	0.00	-0+50	0.00	0.00	0.00
-0+35	8.76	2.43	2.43	-0+35	22.66	6.30	6.30
-0+15	27.76	13.53	15.96	-0+15	11.39	12.61	18.91
0+00	30.45	16.17	32.13	0+00	10.60	6.11	25.02
0+16.61	27.96	17.97	50.10	0+16.61	11.13	6.68	31.70
0+31.62	22.03	13.90	64.00	0+31.62	13.93	6.96	38.67
0+50	14.25	12.35	76.34	0+50	11.25	8.57	47.23
0+63.25	12.96	6.67	83.02	0+63.25	10.62	5.36	52.60
1+00	12.96	17.65	100.66	1+00	10.62	14.45	67.05
1+50	12.96	24.01	124.67	1+50	10.62	19.66	86.71
2+00	12.96	24.01	148.67	2+00	10.62	19.66	106.38
2+50	12.96	24.01	172.68	2+50	10.62	19.66	126.04
3+00	12.96	24.01	196.68	3+00	10.62	19.66	145.70
3+50	12.96	24.01	220.69	3+50	10.62	19.66	165.37
4+00	12.96	24.01	244.70	4+00	10.62	19.66	185.03
4+50	13.39	24.40	269.10	4+50	10.62	19.66	204.70
5+00	13.39	24.80	293.89	5+00	10.62	19.66	224.36
5+50	13.39	24.80	318.69	5+50	10.62	19.66	244.02
6+00	13.39	24.80	343.49	6+00	10.62	19.66	263.69
6+50	13.39	24.80	368.29	6+50	10.62	19.66	283.35
7+00	13.39	24.80	393.09	7+00	10.62	19.66	303.01
7+50	13.39	24.80	417.89	7+50	10.62	19.66	322.68
8+00	13.42	24.83	442.72	8+00	10.62	19.66	342.34
8+50	13.49	24.92	467.64	8+50	10.62	19.66	362.00
9+00	13.38	24.88	492.52	9+00	10.62	19.66	381.67
9+50	13.31	24.72	517.24	9+50	10.62	19.66	401.33
10+00	13.31	24.66	541.90	10+00	10.62	19.66	421.00
10+20.31	13.26	9.99	551.89	10+20.31	10.62	7.99	428.98

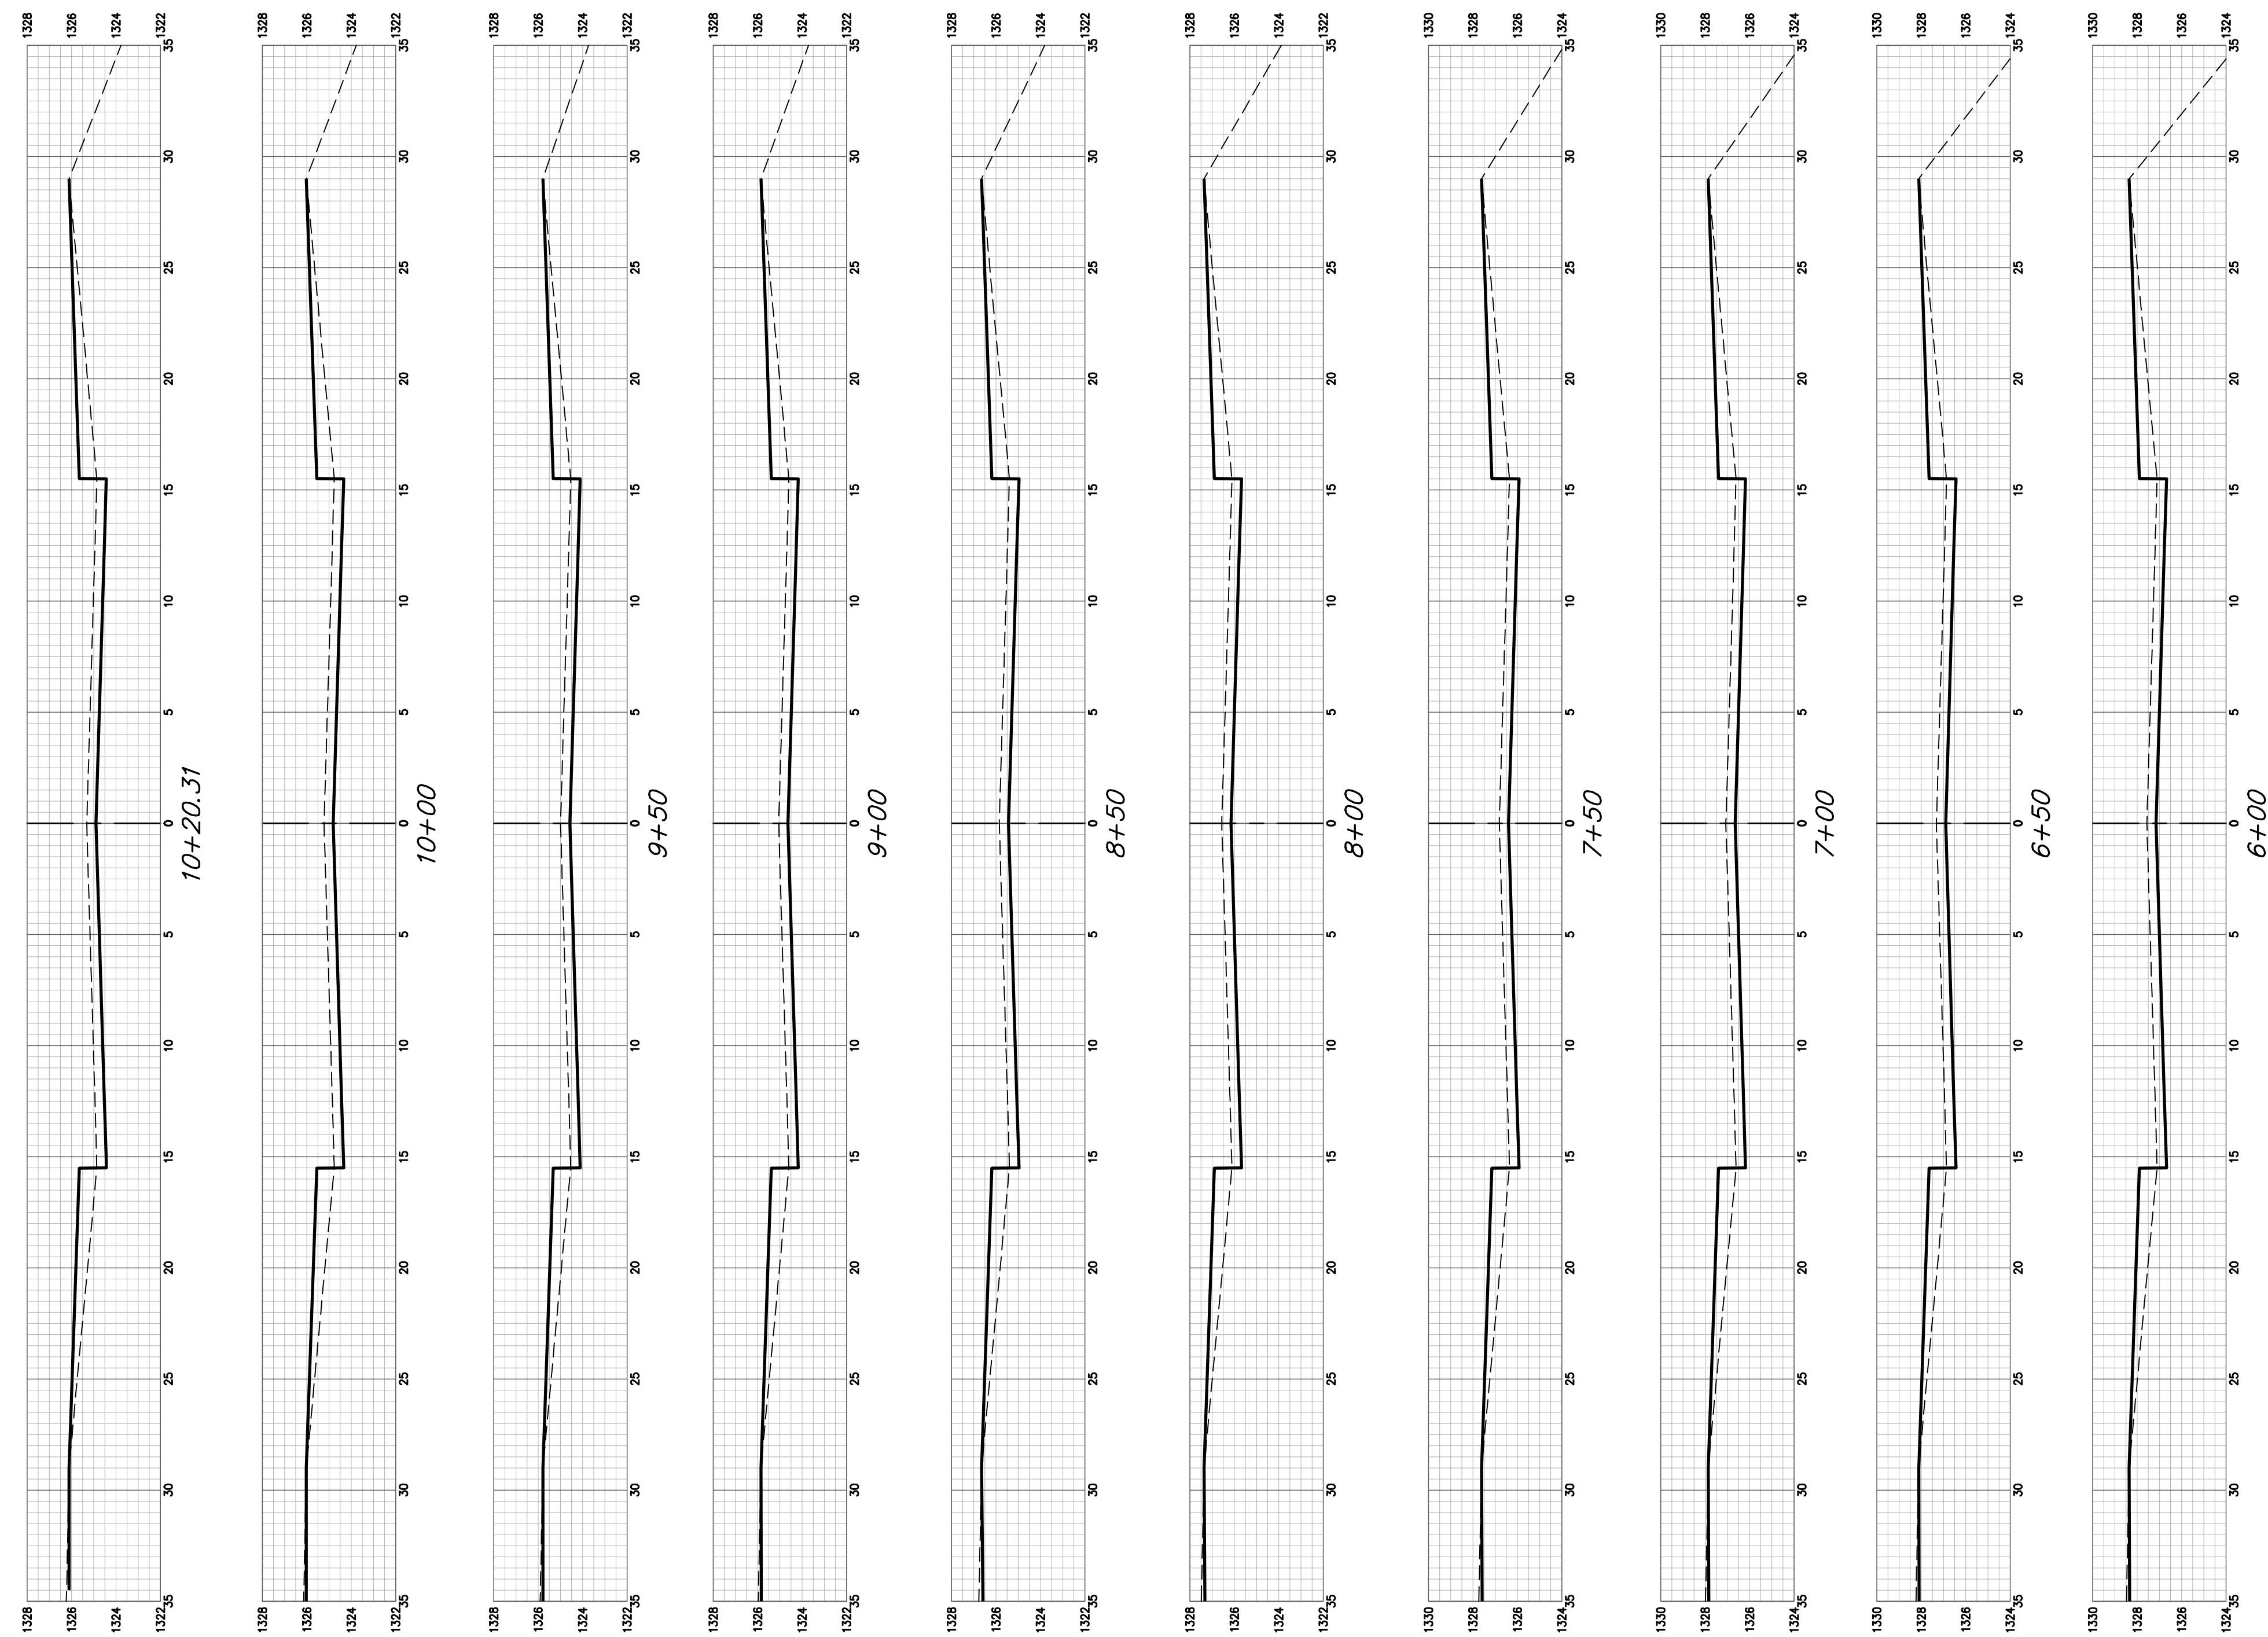

WAVECREST CIR