


33RD ST S CY Excavation (unadjusted)				33RD ST S CY Compacted Fill (unadjusted)				33RD ST S CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
0+00	15.46	0.00	0.00	0+00	1.26	0.00	0.00	0+00	13.24	0.00	0.00
0+50	15.46	28.63	28.63	0+50	1.26	2.57	2.57	0+50	13.24	24.37	24.37
1+00	15.46	28.63	57.26	1+00	1.26	2.77	5.34	1+00	13.24	24.24	48.61
1+50	15.46	28.63	85.89	1+50	1.26	2.77	8.11	1+50	13.24	24.24	72.85
2+00	15.46	28.63	114.52	2+00	1.26	2.71	10.82	2+00	13.24	24.28	97.13
2+30.80	15.46	17.64	132.15	2+30.80	0.99	0.98	11.79	2+30.80	11.70	14.57	111.71
2+56.99	21.59	18.62	150.77	2+56.99	0.98	0.73	12.52	2+56.99	4.84	7.79	119.50
2+83.20	15.46	18.63	169.39	2+83.20	0.98	0.73	13.25	2+83.20	11.40	7.63	127.13
3+00	15.46	9.62	179.01	3+00	0.98	0.47	13.72	3+00	10.14	6.85	133.98
3+50	15.46	28.63	207.64	3+50	0.98	1.61	15.33	3+50	10.14	18.89	152.88
4+00	15.46	28.63	236.27	4+00	0.98	1.82	17.15	4+00	10.14	18.79	171.66
4+50	15.46	28.63	264.90	4+50	0.98	1.82	18.97	4+50	10.14	18.79	190.45
5+00	15.46	28.63	293.53	5+00	0.98	2.25	21.22	5+00	10.14	18.56	209.00
5+50	15.46	28.63	322.16	5+50	0.98	2.08	23.30	5+50	10.14	18.65	227.65
5+71.95	15.45	12.56	334.72	5+71.95	0.98	0.80	24.10	5+71.95	12.65	9.27	236.92



33RD ST SOUTH

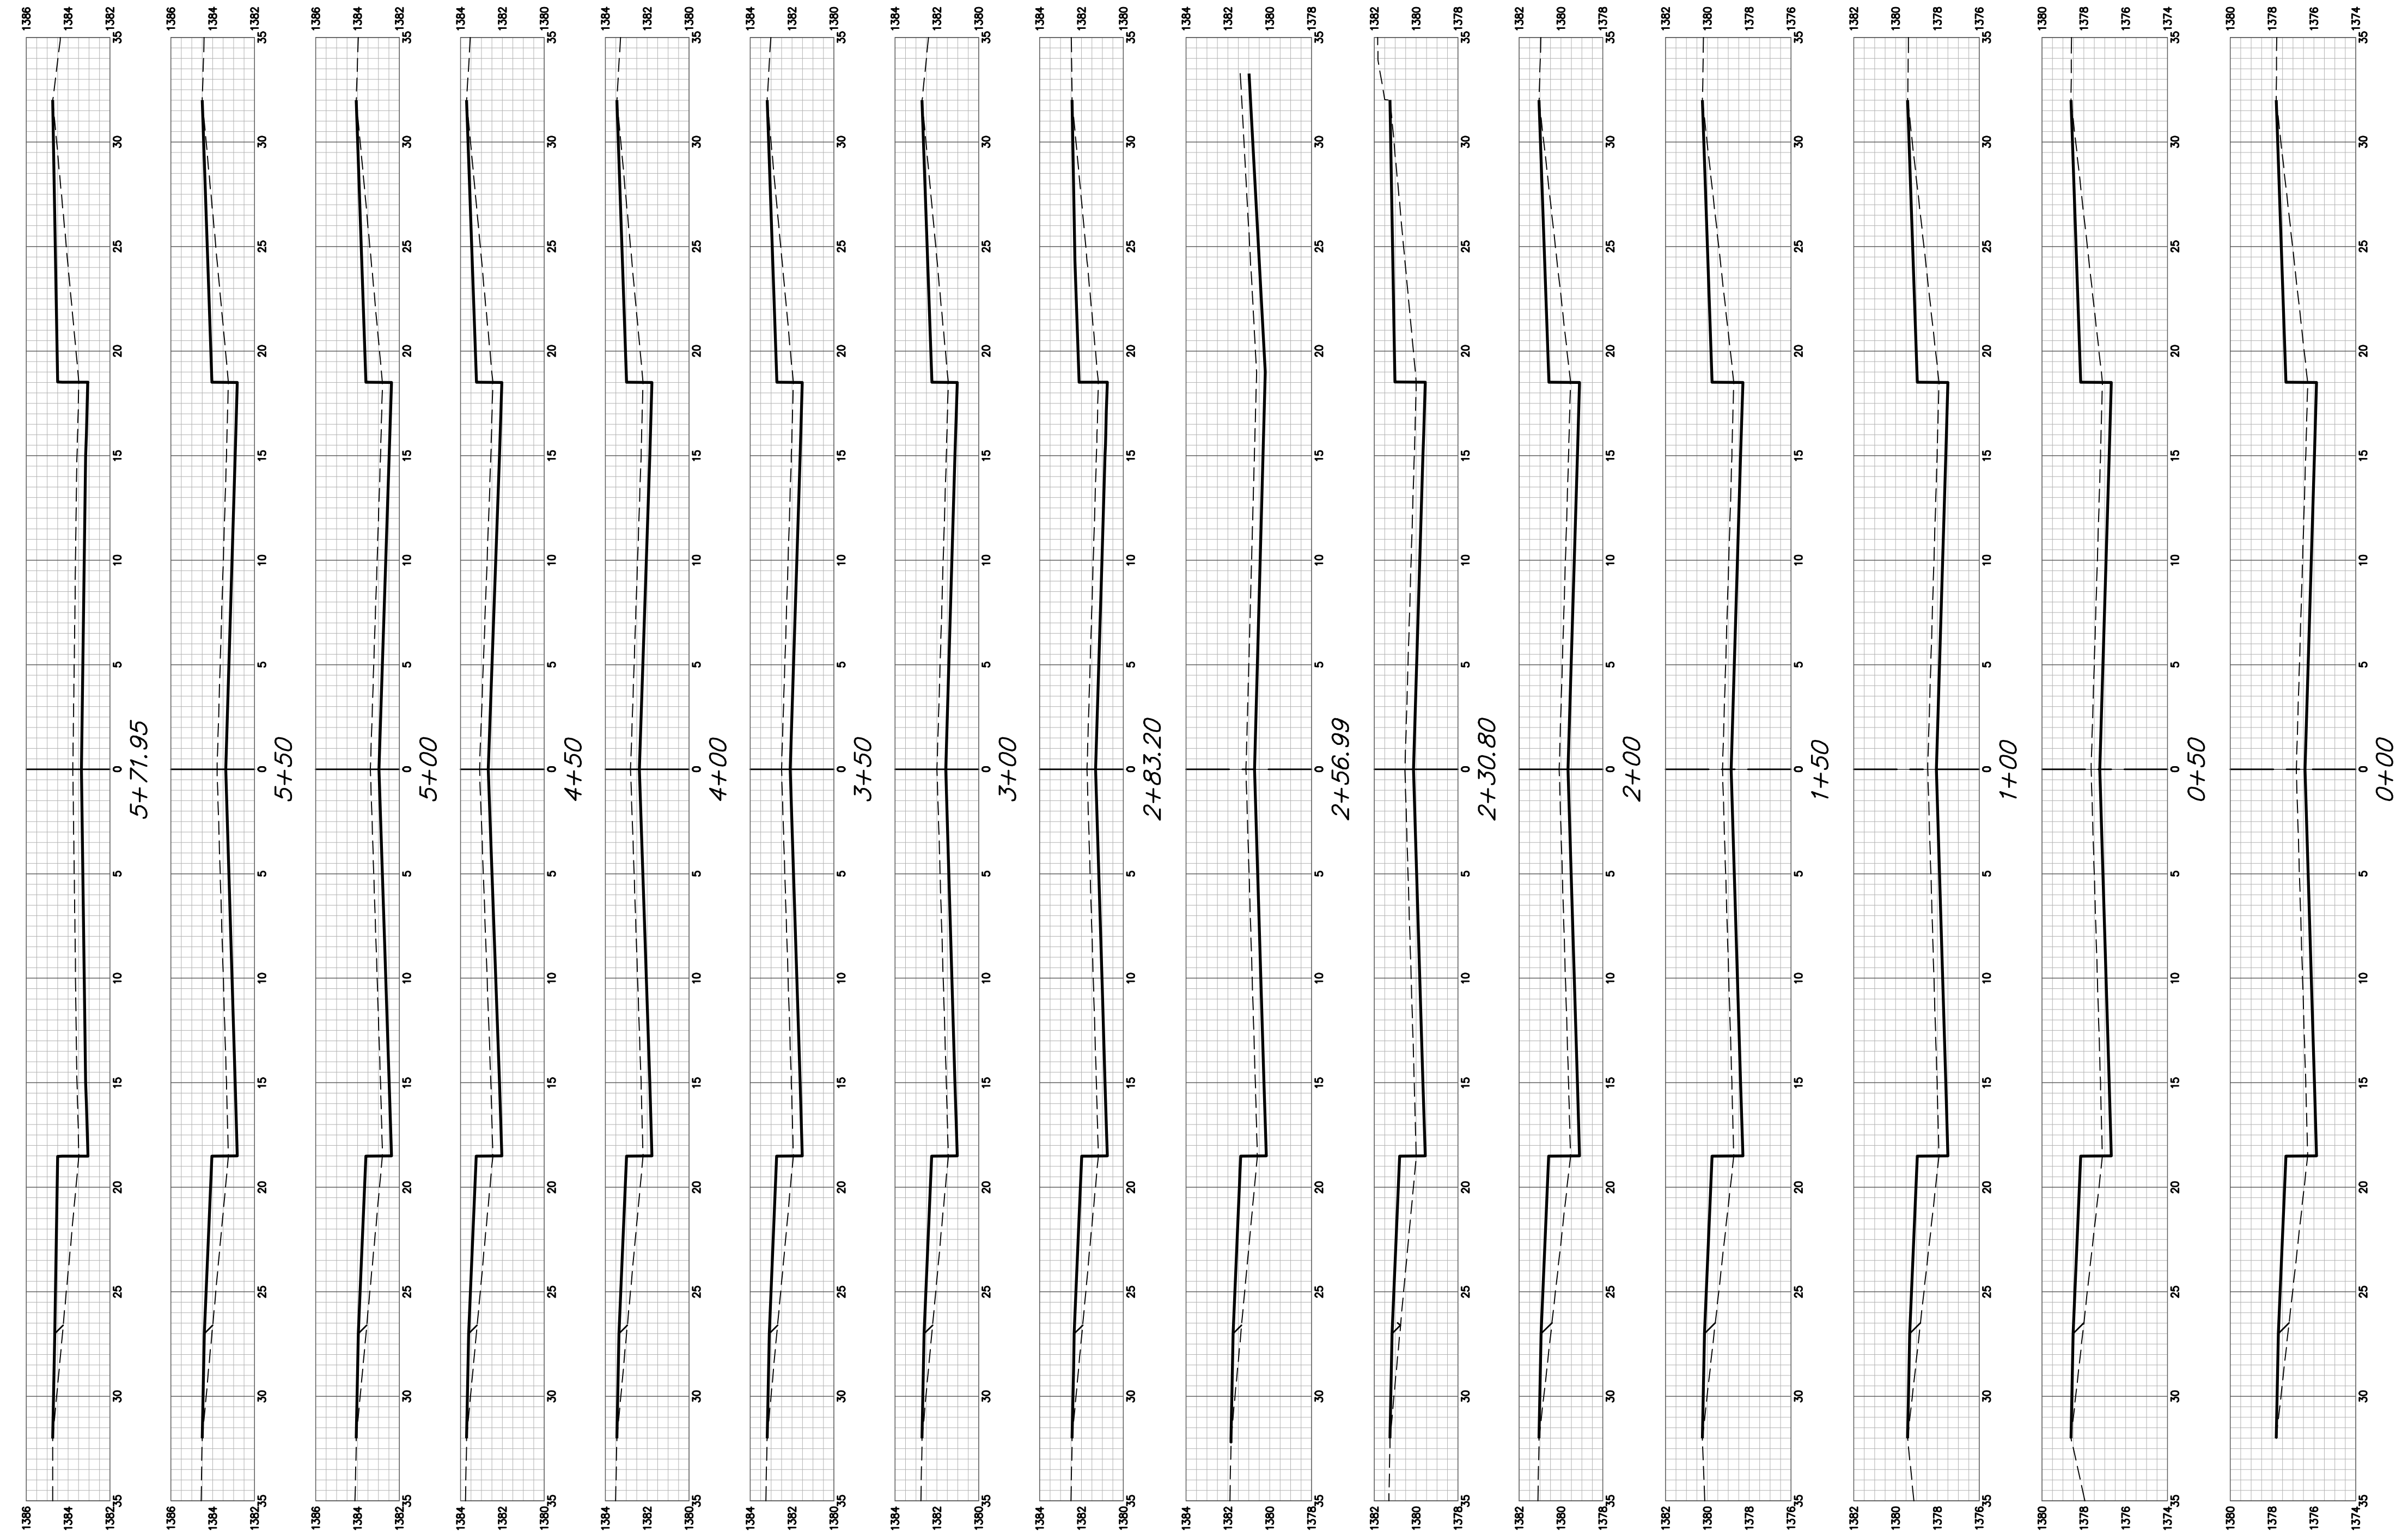

Baughman
 ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE
 PROJECT NUMBER: 472-85430
 SHEET: 20 OF 27
 C:\Projects\Rocky Ford 2nd Addition_Engineering\Phase 1\Str_17-12-E893\STR PLANS.DWG