

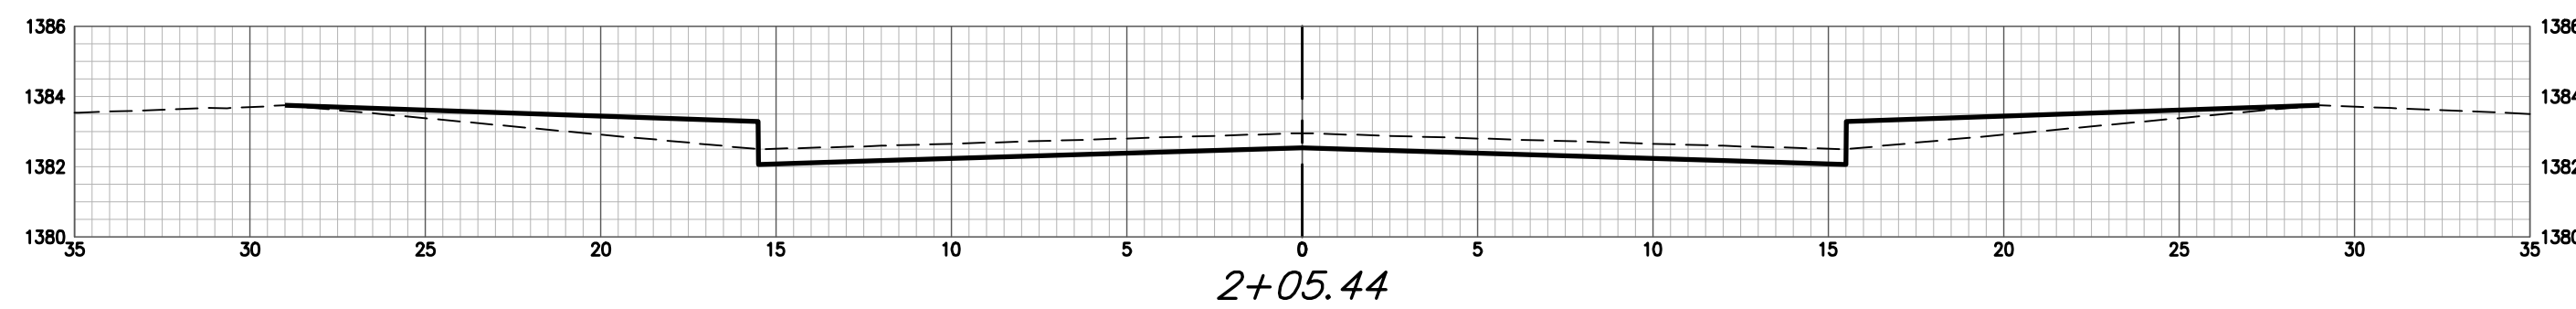
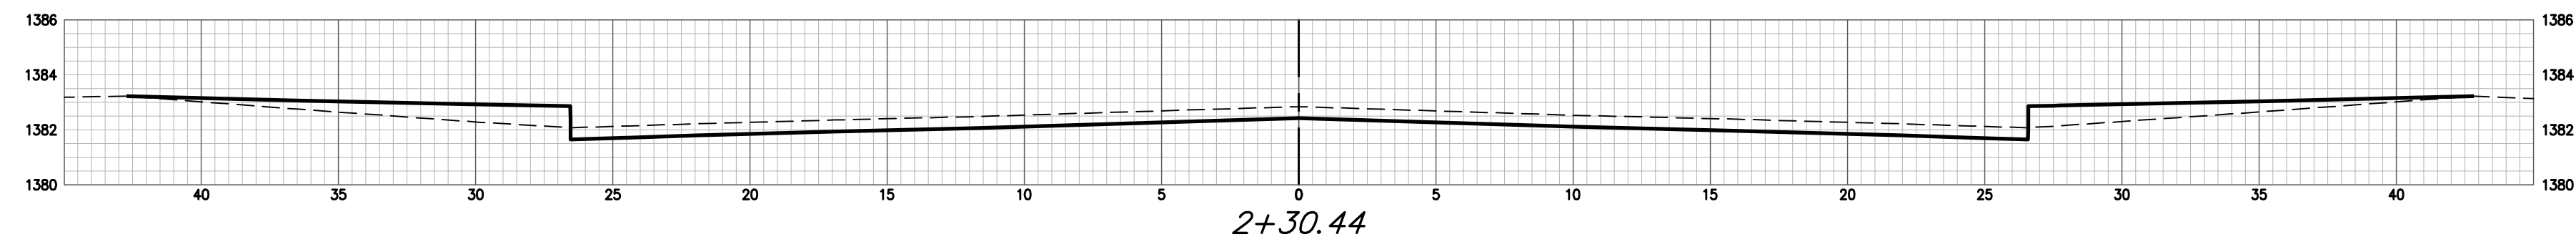
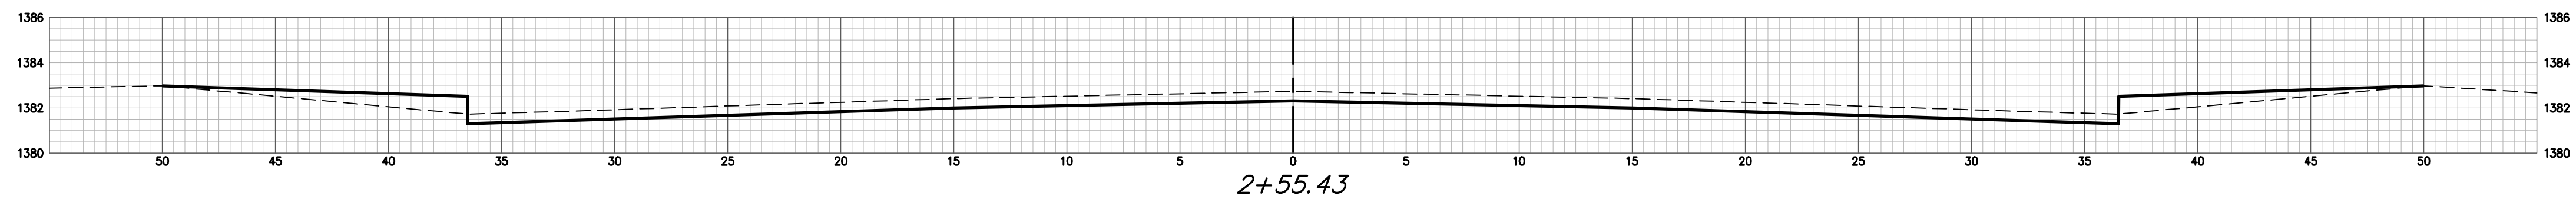
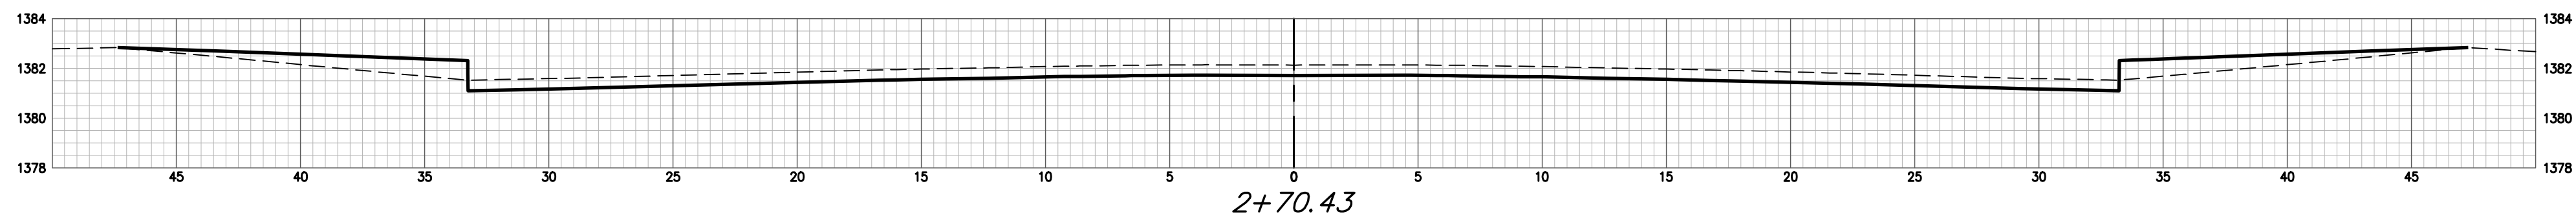


LORI CT CY Excavation (unadjusted)				LORI CT CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total
0+38.12	12.56	0.00	0.00	0+38.12	13.73	0.00	0.00
0+50	12.96	5.62	5.62	0+50	10.62	5.36	5.36
1+00	12.96	24.01	29.62	1+00	10.62	19.66	25.02
1+50	12.96	24.01	53.63	1+50	10.62	19.66	44.68
2+05.44	12.96	26.62	80.25	2+05.44	10.62	21.80	66.49
2+30.44	22.19	16.27	96.52	2+30.44	12.97	10.92	77.41
2+55.43	30.46	24.37	120.89	2+55.43	10.62	10.92	88.33
2+70.43	27.76	16.17	137.06	2+70.43	11.25	6.08	94.40
2+90.43	8.57	13.45	150.52	2+90.43	21.73	12.22	106.62
3+05.43	0.00	2.38	152.90	3+05.43	0.00	6.04	112.66

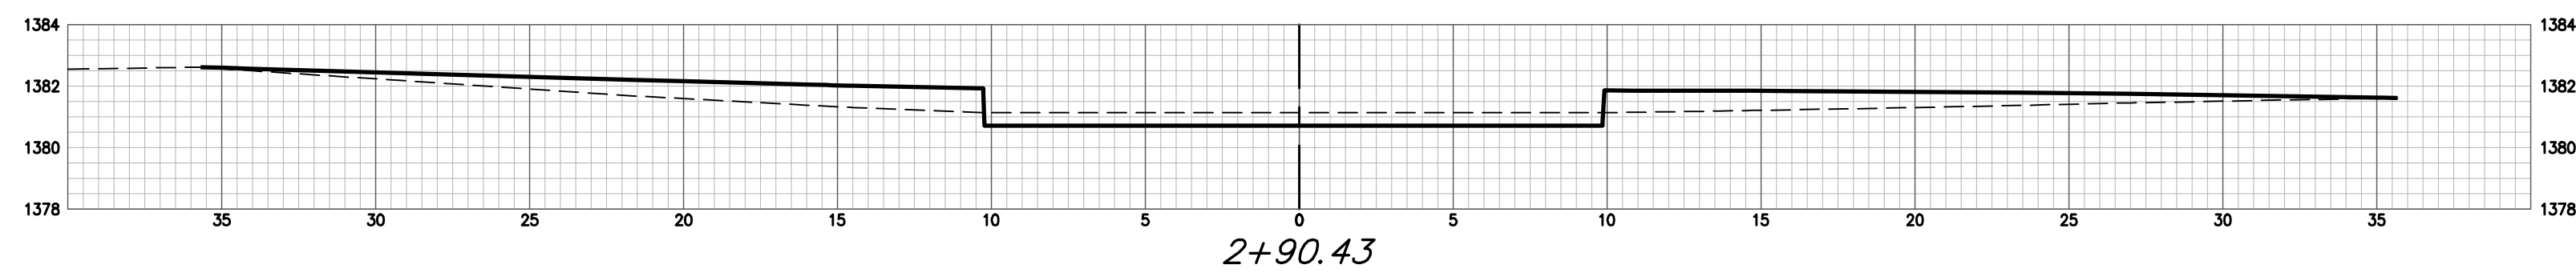

LORI CT

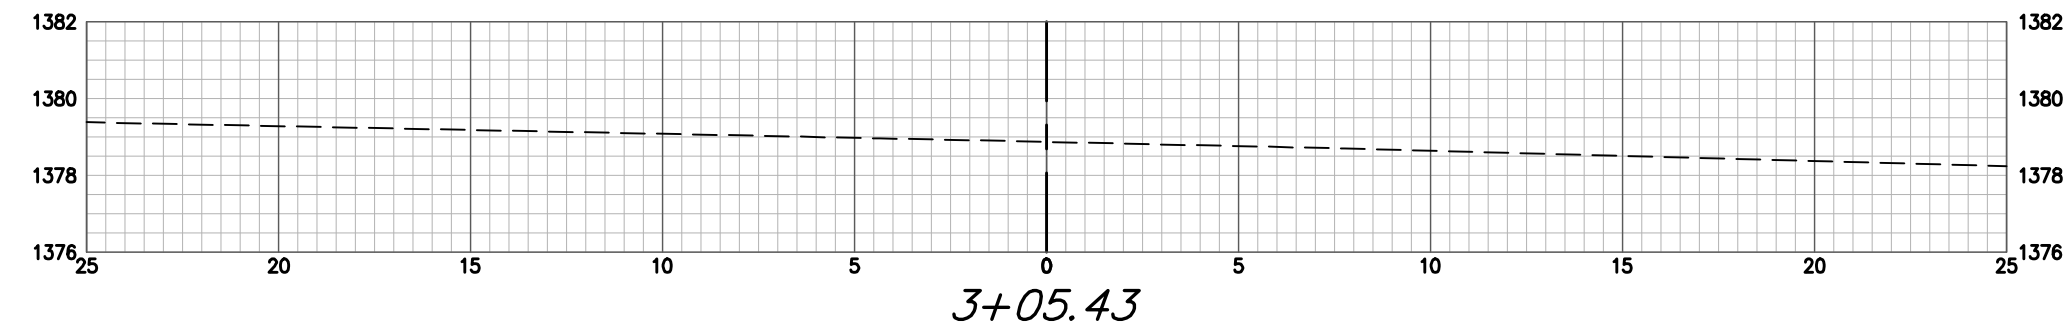