

CAUTION!!! 1.500 m TRANSMISSION LINE FROM CHENEY RESERVOIR. SHALLOW DEPTH. CONTRACTOR TO MAINTAIN MINIMAL HEAVY EQUIPMENT TRAFFIC ACROSS LINE DURING CONSTRUCTION.

FHWA REGION NO.	STATE	PROJECT NUMBER	FISCAL YEAR	SHEET NUMBER	TOTAL SHEETS
7	KANSAS	87 N-0189-01	2001	17	105

DATE	BY	REFERENCES NOTED	REFERENCES CHECKED

STA. 11+003.121 TO 11+081.933
CONST. 178.193 SQ. METERS
TEMPORARY PAVEMENT
(SEE CONST. STAGING SHEET 54
FOR INSTALLATION PHASING)

STA. 11+085.704, 24 084 LT.
CONSTRUCT 6.511 m WIDE
CONCRETE APPROACH AND DRIVE

P.V.I.
Elev. 412.343 (CL)
NO V.C.

P.V.I.
Elev. 412.180 (TC)
NO V.C.

STA. 11+088.634 TO 11+182.839
CONST. 264.948 SQ. METERS
TEMPORARY PAVEMENT
(SEE CONST. STAGING SHEET 54
FOR INSTALLATION PHASING)


NORTHWEST
CHRISTIAN
CHURCH
ADDITION

STA. 11+188.655, 24 084 LT.
CONSTRUCT 7.890 m WIDE
CONCRETE DRIVEWAY

P.V.I.
Elev. 412.043 (CL)
NO V.C.

P.V.I.
Elev. 411.880 (TC)
NO V.C.

+0.480%
CL
+0.338%
TC LT.

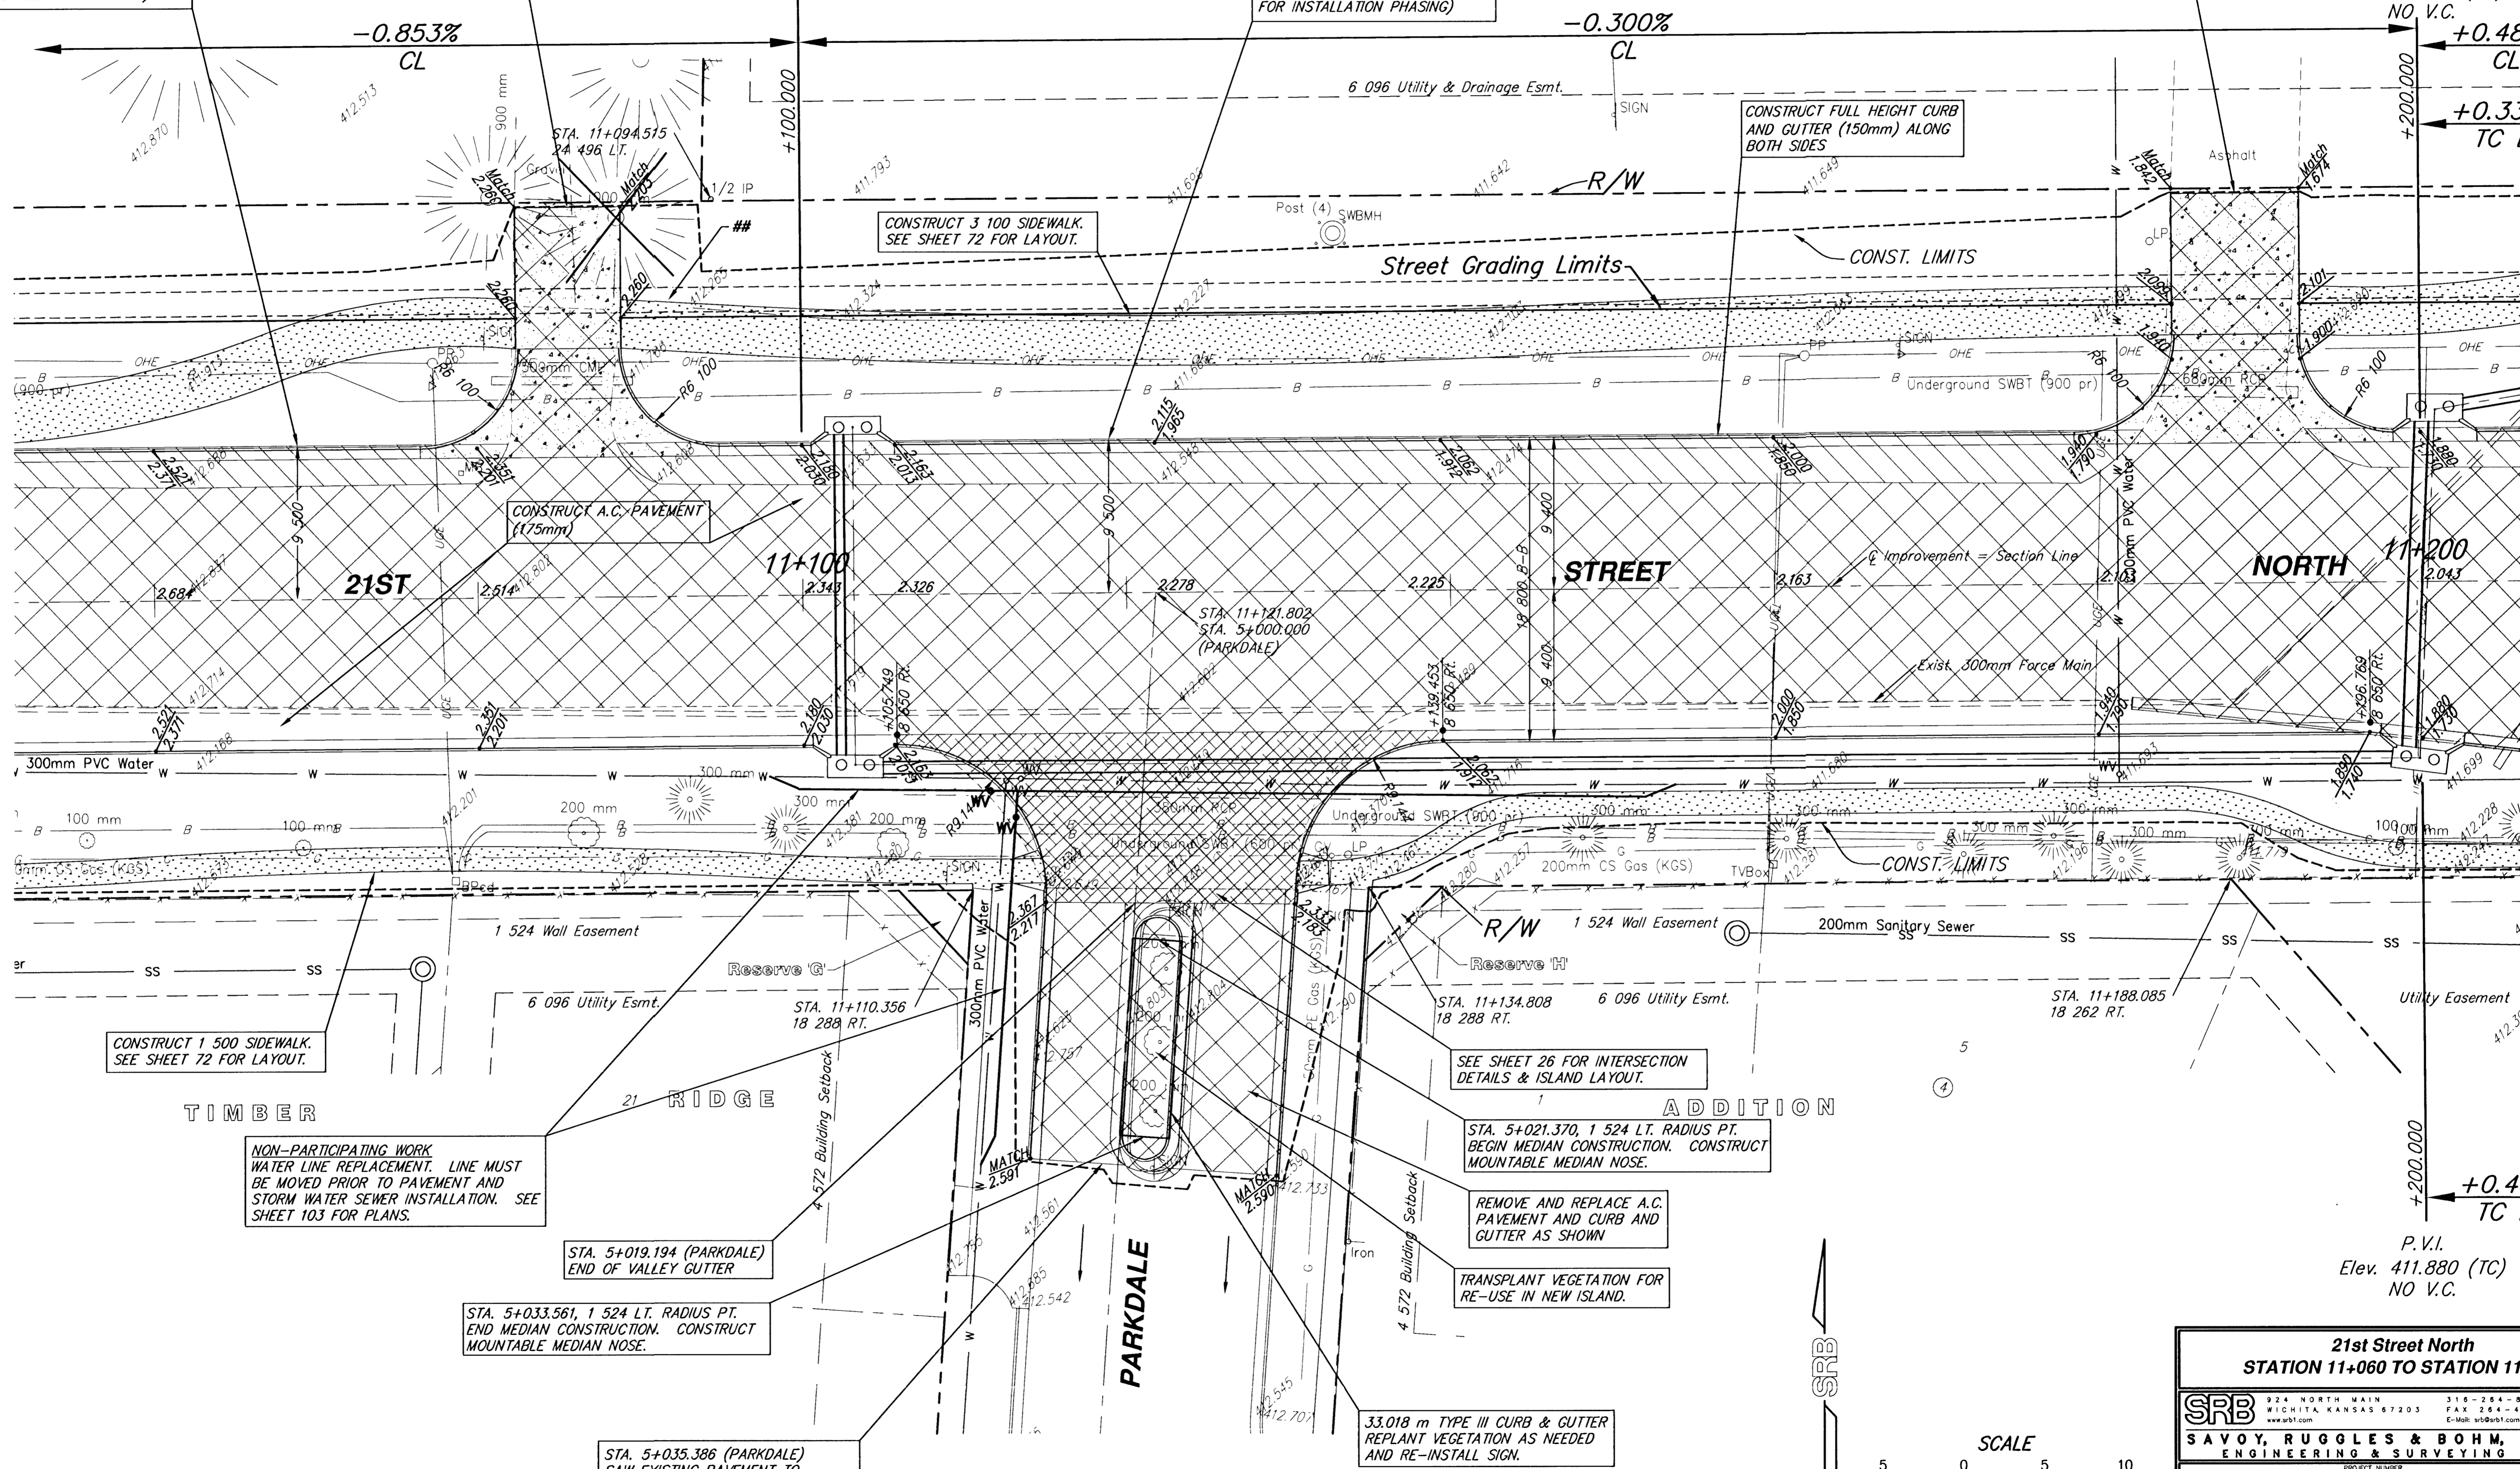

CONSTRUCT 1 500 SIDEWALK.
SEE SHEET 72 FOR LAYOUT.

NON-PARTICIPATING WORK
WATER LINE REPLACEMENT. LINE MUST
BE MOVED PRIOR TO PAVEMENT AND
STORM WATER SEWER INSTALLATION. SEE
SHEET 103 FOR PLANS.

STA. 5+019.194 (PARKDALE)
END OF VALLEY GUTTER

STA. 5+033.561, 1 524 LT. RADIUS PT.
END MEDIAN CONSTRUCTION. CONSTRUCT
MOUNTABLE MEDIAN NOSE.

STA. 5+035.386 (PARKDALE)
SAW EXISTING PAVEMENT TO
NEAT LINE AND MATCH.


SEE SHEET 26 FOR INTERSECTION
DETAILS & ISLAND LAYOUT.

STA. 5+021.370, 1 524 LT. RADIUS PT.
BEGIN MEDIAN CONSTRUCTION. CONSTRUCT
MOUNTABLE MEDIAN NOSE.

REMOVE AND REPLACE A.C.
PAVEMENT AND CURB AND
GUTTER AS SHOWN

TRANSPLANT VEGETATION FOR
RE-USE IN NEW ISLAND.

33.018 m TYPE III CURB & GUTTER
REPLANT VEGETATION AS NEEDED
AND RE-INSTALL SIGN.

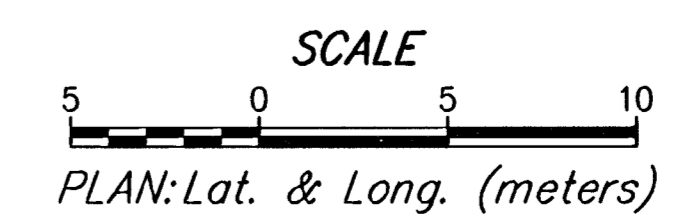

**21st Street North
STATION 11+060 TO STATION 11+200**

SRB
224 NORTH MAIN
WICHITA, KANSAS 67203
www.srb.com

**SAVOY, RUGGLES & BOHM, P.A.
ENGINEERING & SURVEYING**

PROJECT NUMBER
472-83138

DESIGN: TEB, MWS, REVIEW: MWS, DATE: May 31, 2001, UTILITY: 1478T

17
105