

BENCHMARKS:

BM #1: "□" Cut in top of curb on north side of Athenian, near the SE corner of Lot 13, Block 1, Valencia Addition.
Elev. = 1332.11 NAVD88




BM #2: Cross cut in sidewalk on north side of Harborlight St., near Lot 23, Block 1, Harbor Isle 2nd Addition.
Elev. = 1330.40 NAVD88

Trees to be removed by the Contractor only as necessary for sewer construction and with approval of the Engineer. Cost of tree removal to be included in bid item "Site Clearing"

SEWER SERVICE TABLE

NUMBER	TYPE	LOCATION				FOR INFORMATION ONLY	
		LOT NO.	BLOCK NO.	LINE NO.	STATION \ DIRECTION	APPROXIMATE LENGTH 4" PIPE VERTICAL	HORIZONTAL
1	8" X 4" Tee W/Riser	1	1	1	0+75.0/Lt.	8.5'	14.8'
2	8" X 4" Tee W/Riser	2	1	1	1+12.2/Lt.	8.5'	14.4'
3	4" Stub W/Riser	15	2	1	7+68.3/Lt.	9.0'	12.6'
4	4" Stub W/Riser	16	2	1	7+68.3/Lt.	9.0'	14.0'

NOTE: Vertical Riser Pipe shall be extended to 2' minimum above ground water elevation and 4' maximum below proposed ground elevation.

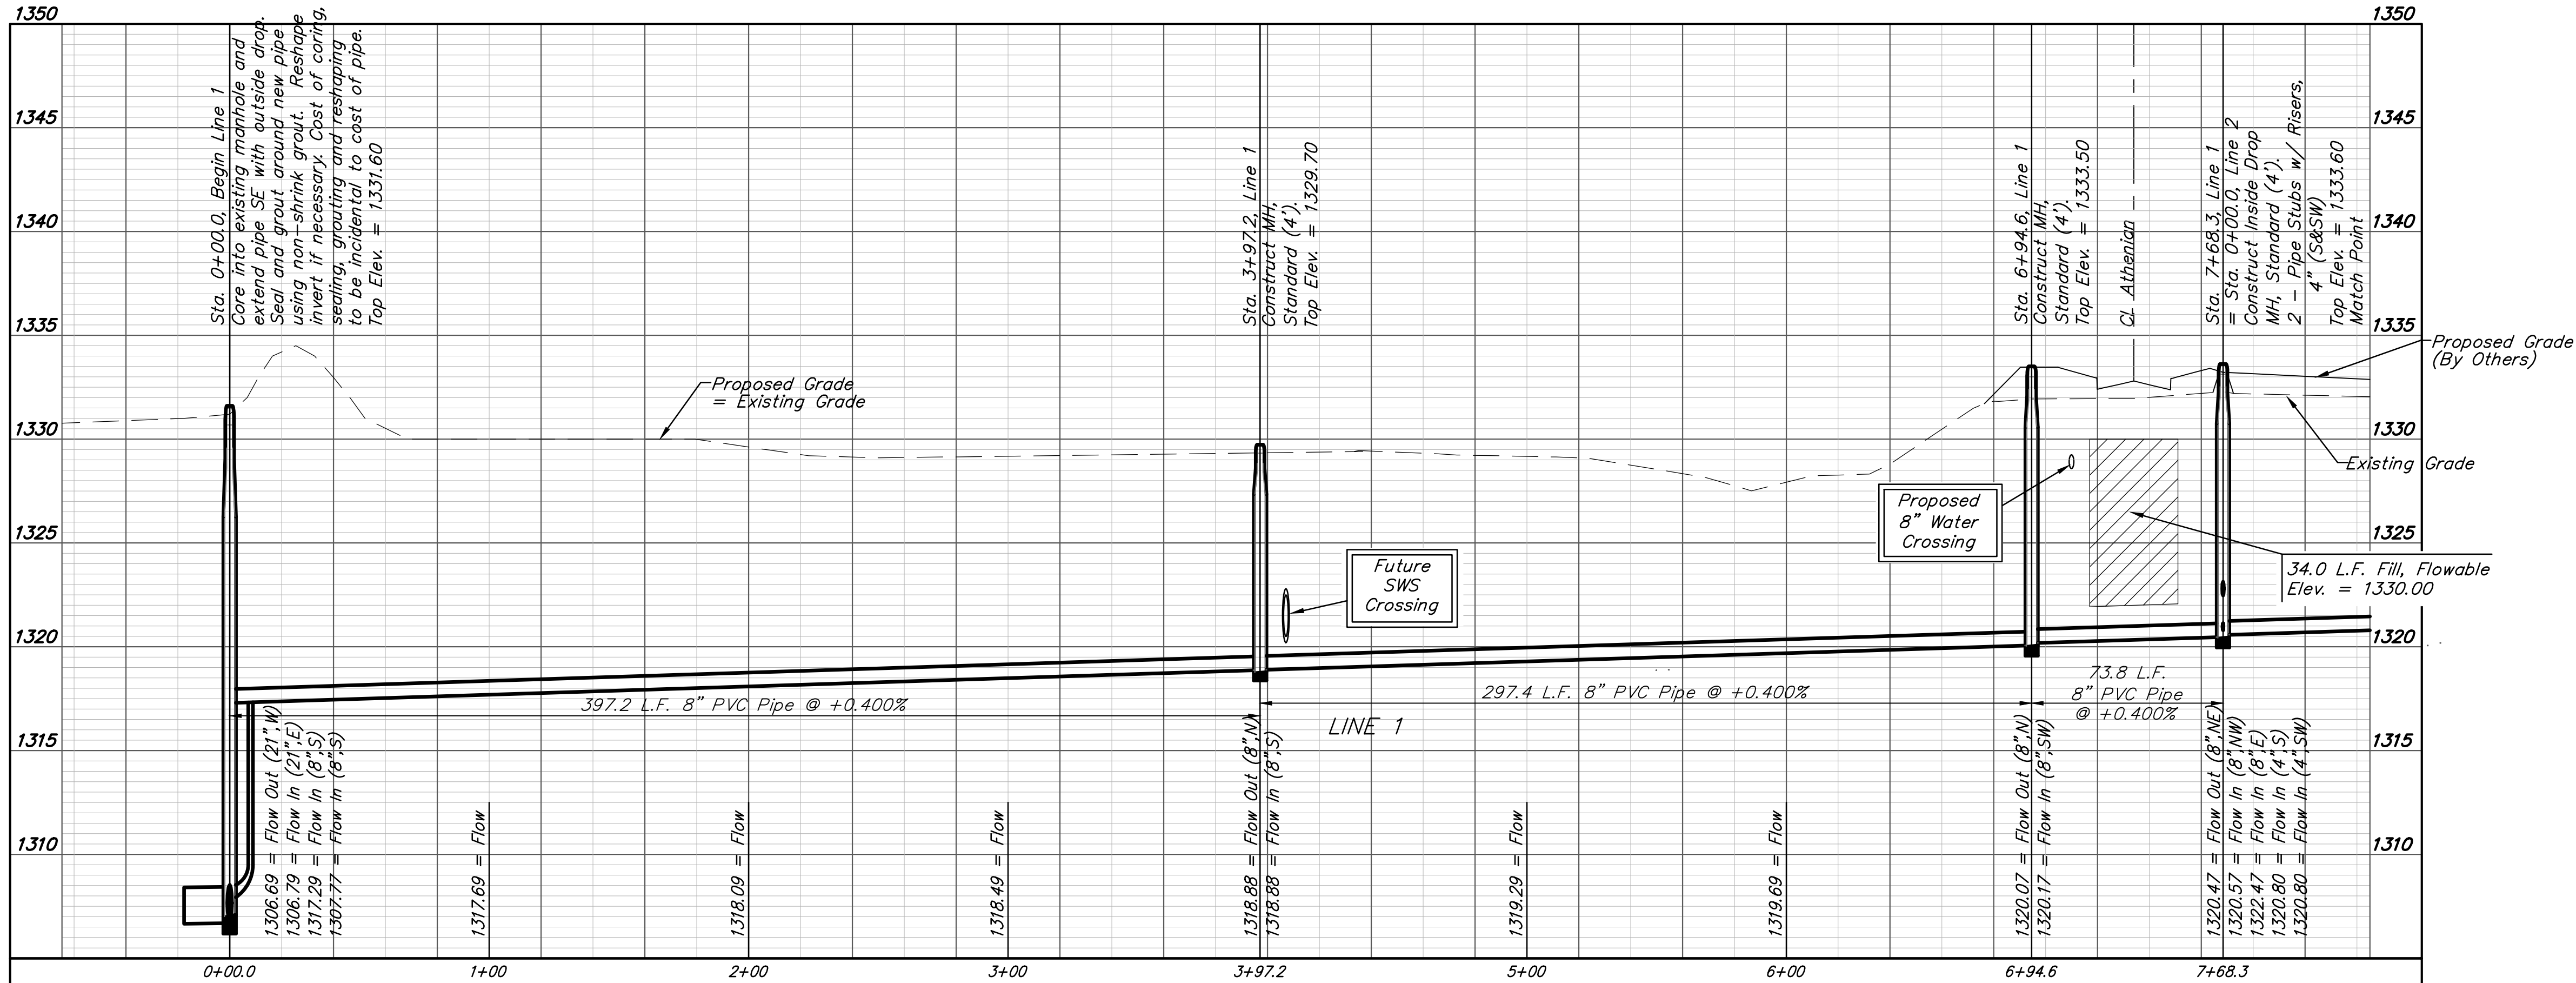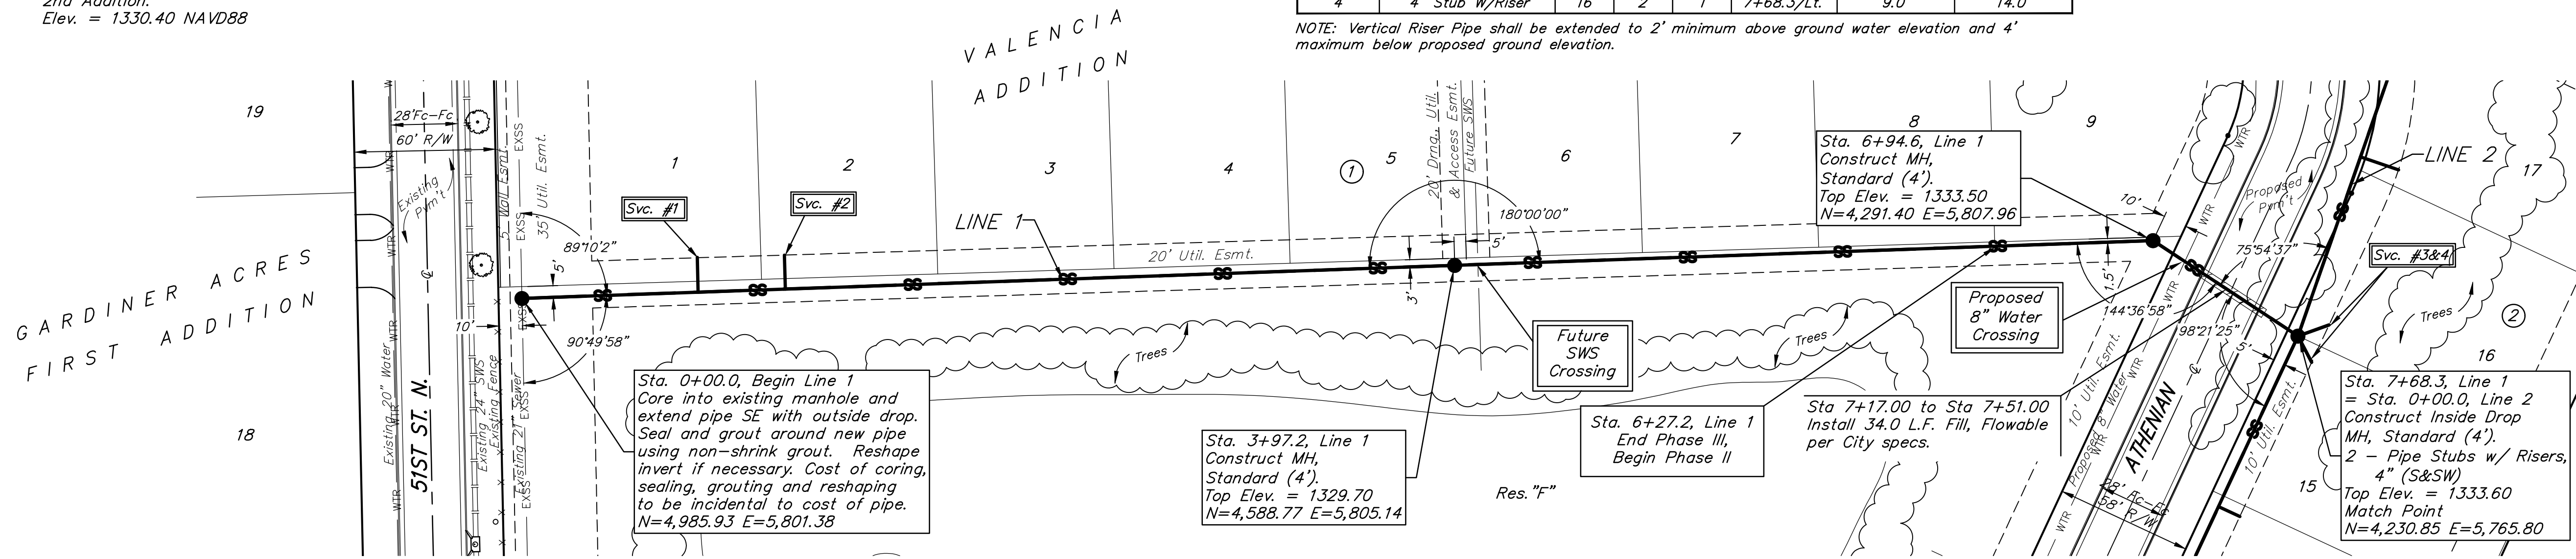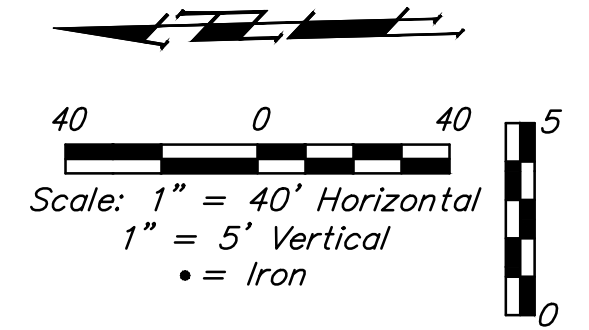

Contractor shall verify location and depth of existing manhole prior to construction and notify Engineer of any discrepancy.