


26TH ST N CY Excavation (unadjusted)				26TH ST N CY Compacted Fill (unadjusted)				26TH ST N CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
9+43.95	16.23	0.00	0.00	9+43.95	0.00	0.00	0.00	9+43.95	8.84	0.00	0.00
9+57.86	21.22	9.65	9.65	9+57.86	1.48	0.38	0.38	9+57.86	9.65	4.76	4.76
10+00	21.48	33.33	42.97	10+00	1.26	2.13	2.52	10+00	9.64	15.06	19.82
10+41.99	21.71	33.59	76.56	10+41.99	1.27	1.97	4.48	10+41.99	9.63	14.99	34.80
10+67.21	13.84	16.60	93.16	10+67.21	0.98	1.05	5.53	10+67.21	11.84	10.03	44.83
10+97.01	14.02	15.37	108.53	10+97.01	0.98	1.09	6.62	10+97.01	11.84	13.07	57.90
11+33.72	22.19	24.37	132.90	11+33.72	0.98	1.42	8.04	11+33.72	4.85	11.45	69.35
11+71.61	15.33	25.99	158.89	11+71.61	0.98	1.48	9.51	11+71.61	10.27	10.76	80.12
12+00	15.39	16.15	175.04	12+00	0.98	1.11	10.62	12+00	10.16	10.70	90.82
12+50	15.46	28.57	203.60	12+50	0.98	1.82	12.44	12+50	10.16	18.81	109.62
13+00	15.46	28.63	232.24	13+00	0.98	1.69	14.13	13+00	10.16	18.88	128.50
13+50	15.46	28.63	260.87	13+50	0.98	1.69	15.82	13+50	10.16	18.88	147.38
14+00	15.46	28.63	289.51	14+00	0.98	1.69	17.51	14+00	10.16	18.88	166.25
14+37.29	15.78	21.60	311.10	14+37.29	0.98	1.27	18.78	14+37.29	9.06	13.27	179.52
14+69.48	22.20	22.64	333.74	14+69.48	0.98	1.17	19.96	14+69.48	4.85	8.29	187.81
15+05.38	15.46	25.04	358.78	15+05.38	0.98	1.31	21.26	15+05.38	11.83	11.09	198.90
15+50	15.46	25.55	384.33	15+50	0.98	1.62	22.89	15+50	10.16	18.16	217.06
16+00	15.46	28.63	412.96	16+00	0.98	1.82	24.71	16+00	10.16	18.81	235.87
16+27.52	15.46	15.76	428.72	16+27.52	0.98	1.00	25.71	16+27.52	10.16	10.35	246.22

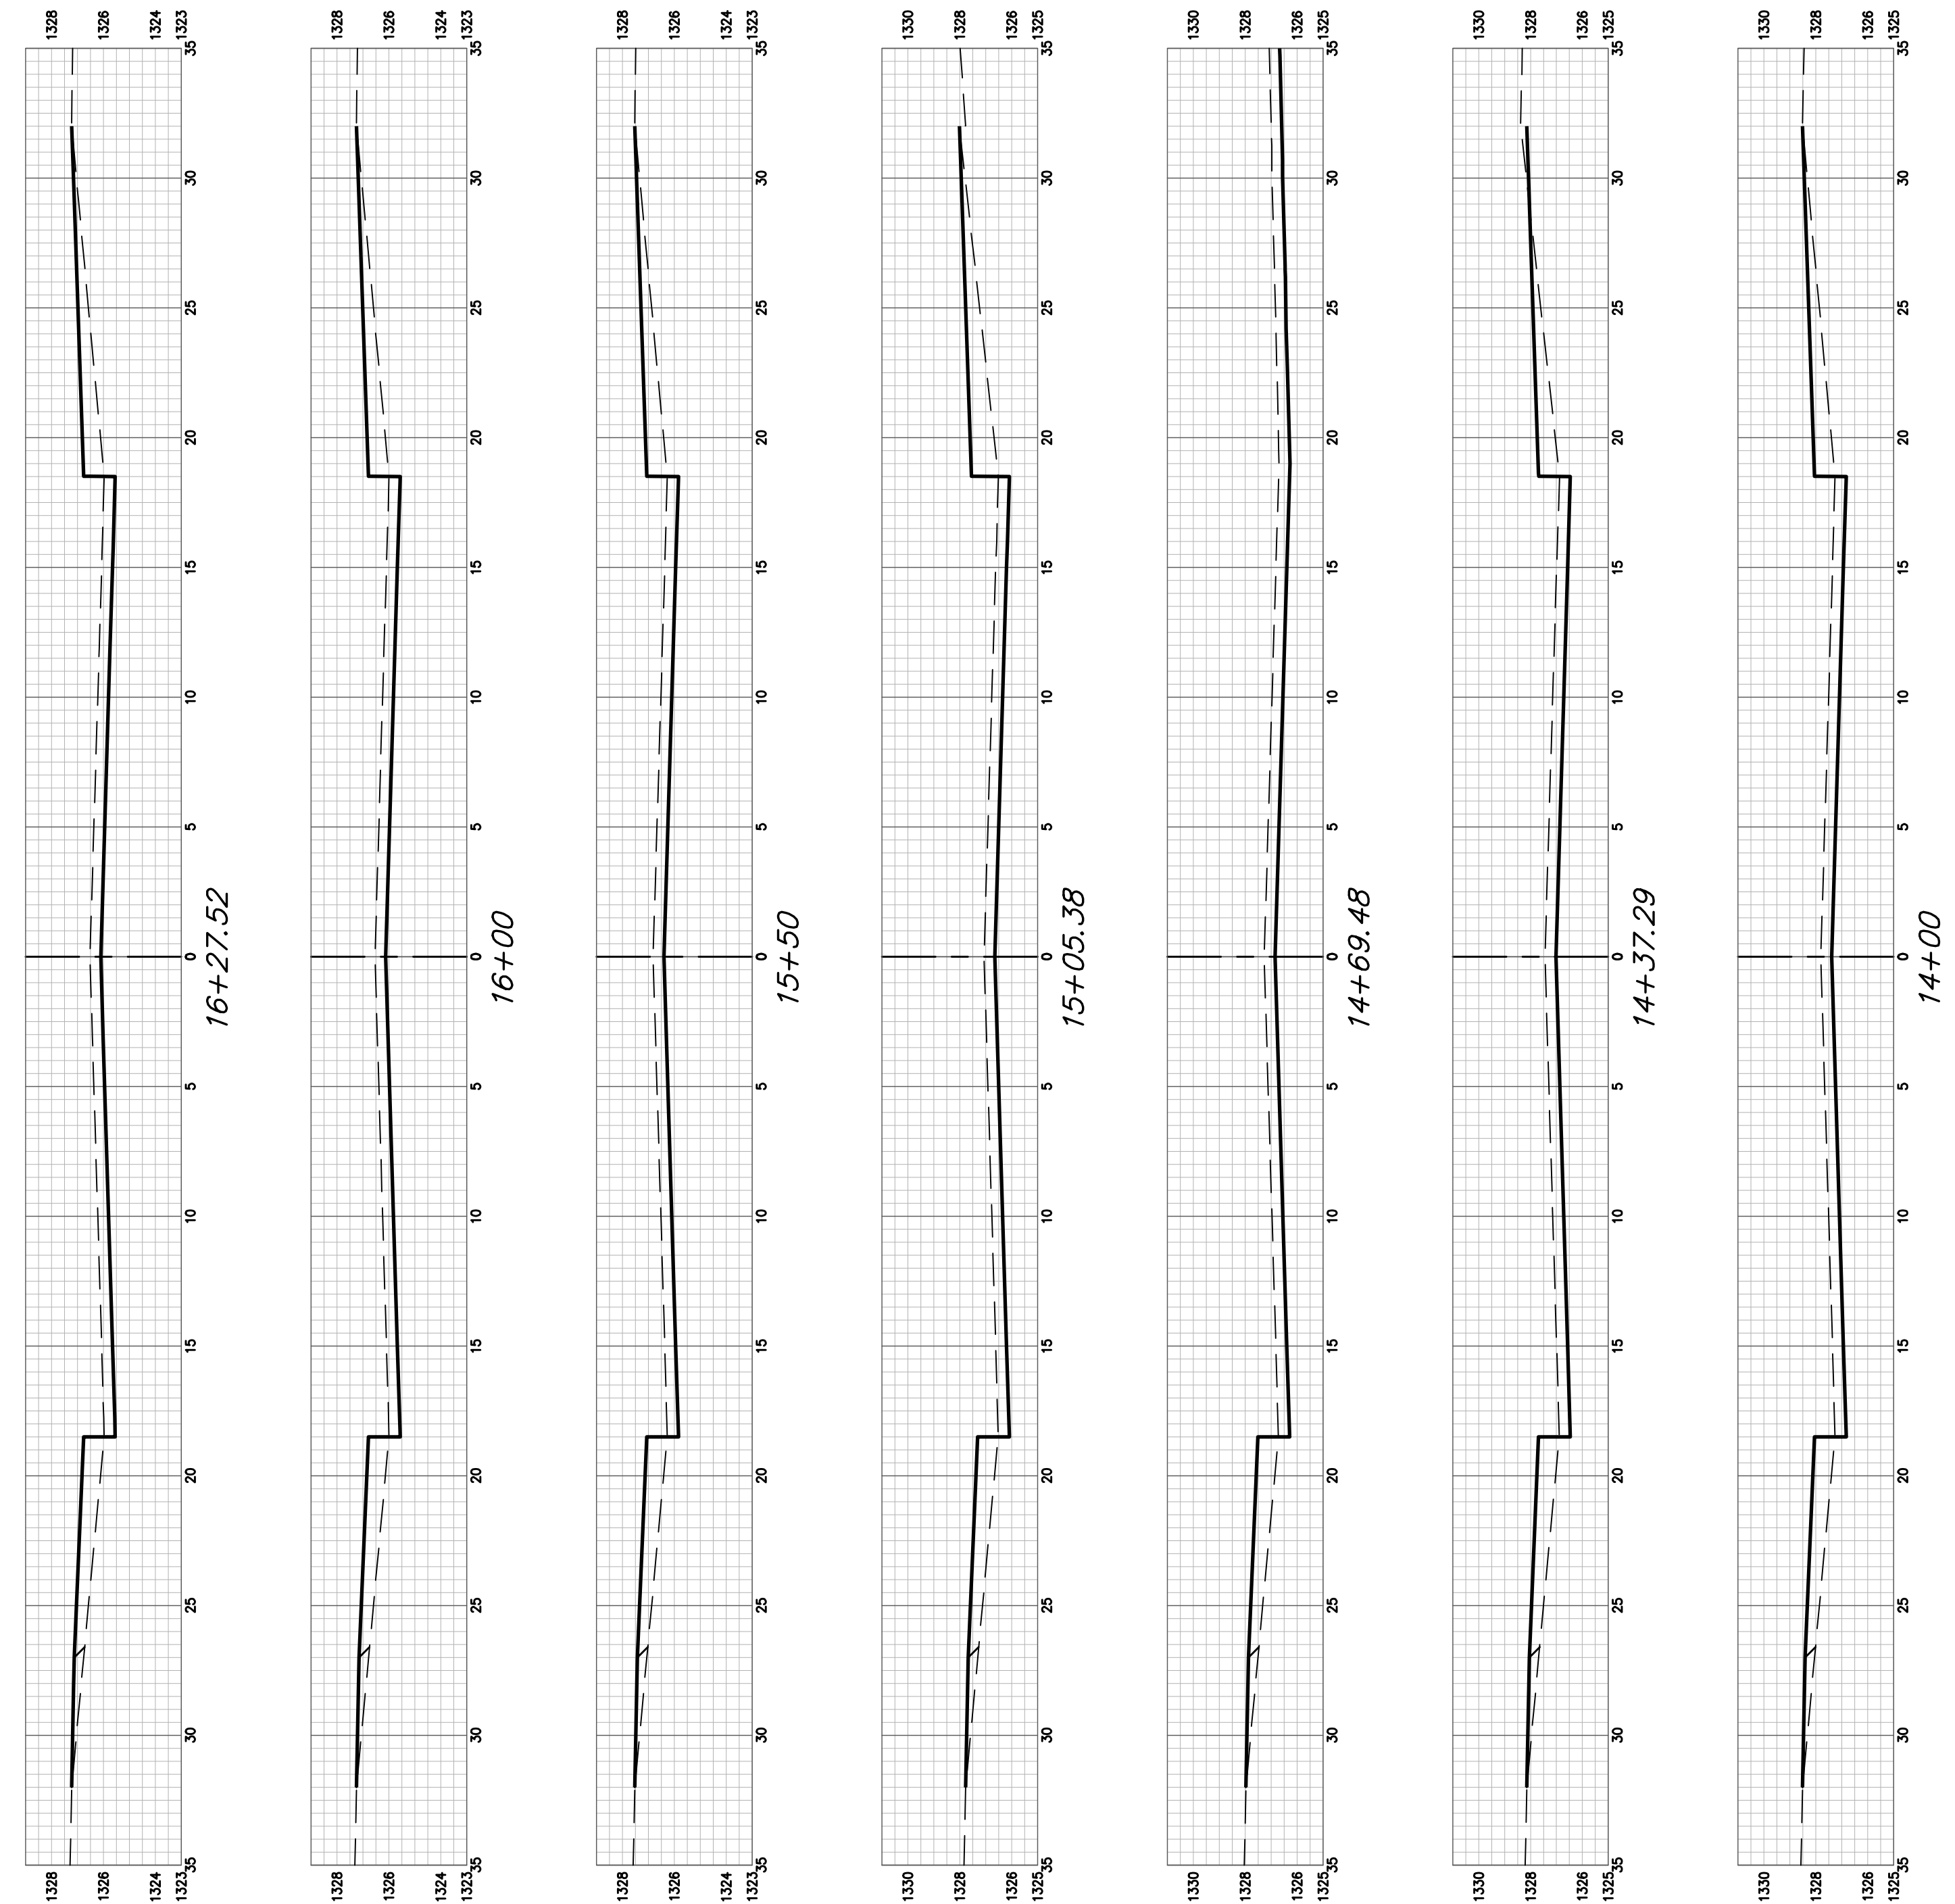

26TH ST NORTH