
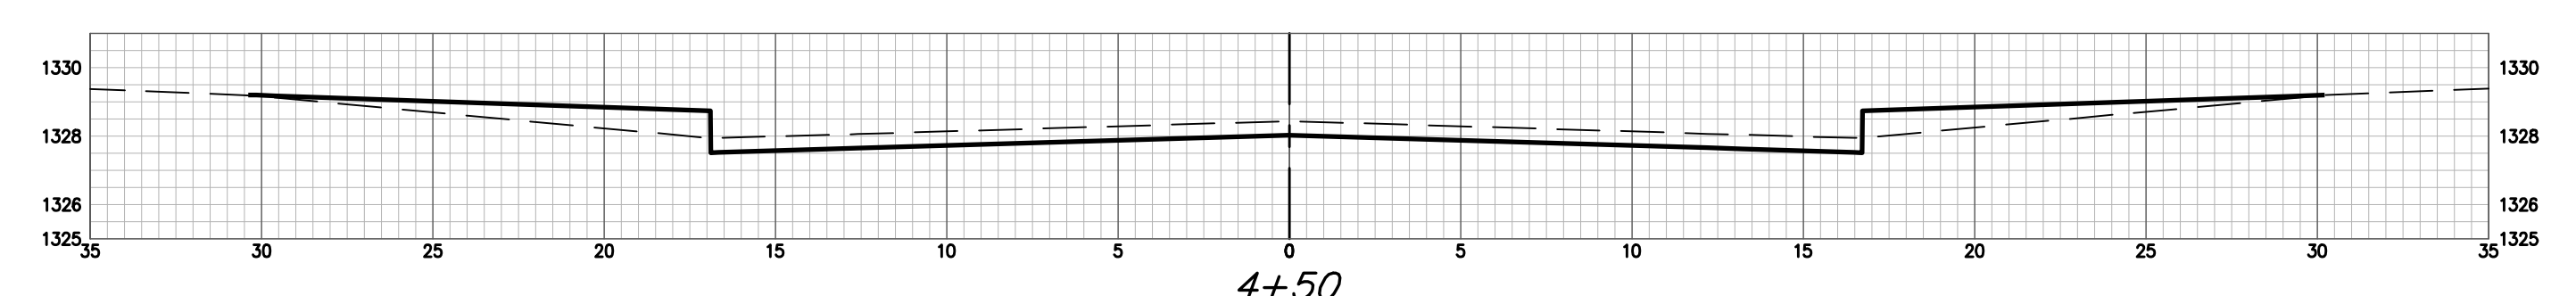


ANNA ST CY Excavation (unadjusted)				ANNA ST CY Compacted Fill (unadjusted)				ANNA ST CY Loose Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total	Station	Area	Volume	Total
1+61	17.11	0.00	0.00	1+61	1.03	0.00	0.00	1+61	10.64	0.00	0.00
2+00	17.50	25.00	25.00	2+00	0.98	1.45	1.45	2+00	10.43	15.22	15.22
2+50	16.85	31.81	56.81	2+50	1.06	1.89	3.34	2+50	10.78	19.64	34.86
3+00	16.47	30.85	87.66	3+00	0.84	1.76	5.11	3+00	9.58	18.86	53.72
3+50	16.07	30.13	117.79	3+50	0.90	1.50	6.61	3+50	9.77	17.97	71.68
4+00	21.22	36.03	153.83	4+00	0.97	1.24	7.85	4+00	4.82	12.65	84.33
4+09.22	21.02	7.75	161.58	4+09.22	0.96	0.24	8.08	4+09.22	4.81	1.29	85.62
4+34.23	13.22	16.51	178.08	4+34.23	0.98	0.65	8.73	4+34.23	12.61	7.91	93.53
4+50	13.86	7.87	185.96	4+50	0.00	0.21	8.94	4+50	10.76	7.02	100.55
4+98.08	12.28	23.27	209.22	4+98.08	0.00	0.00	8.94	4+98.08	11.22	19.56	120.11

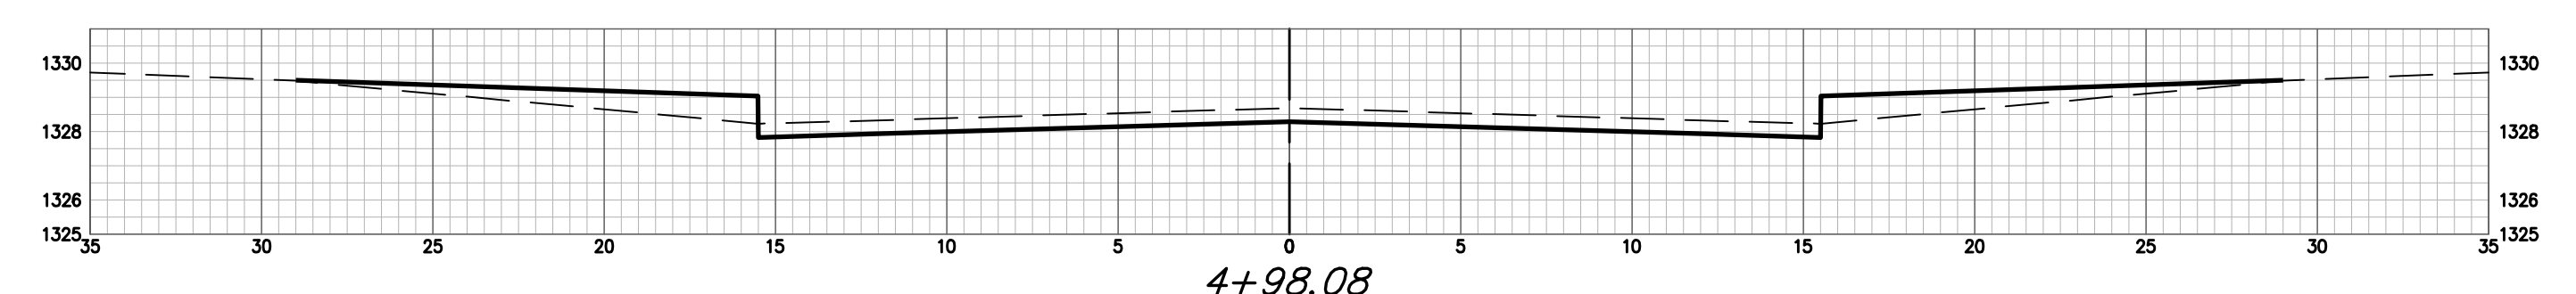

ANNA ST