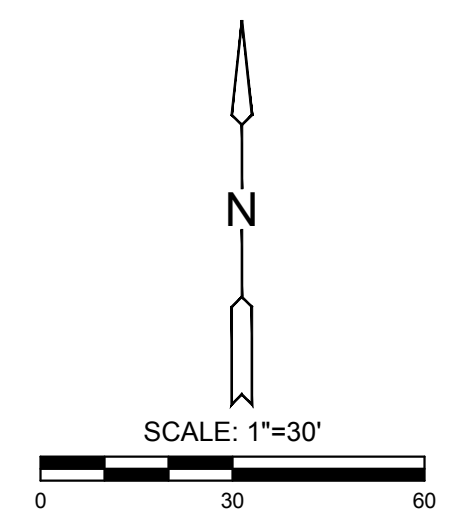
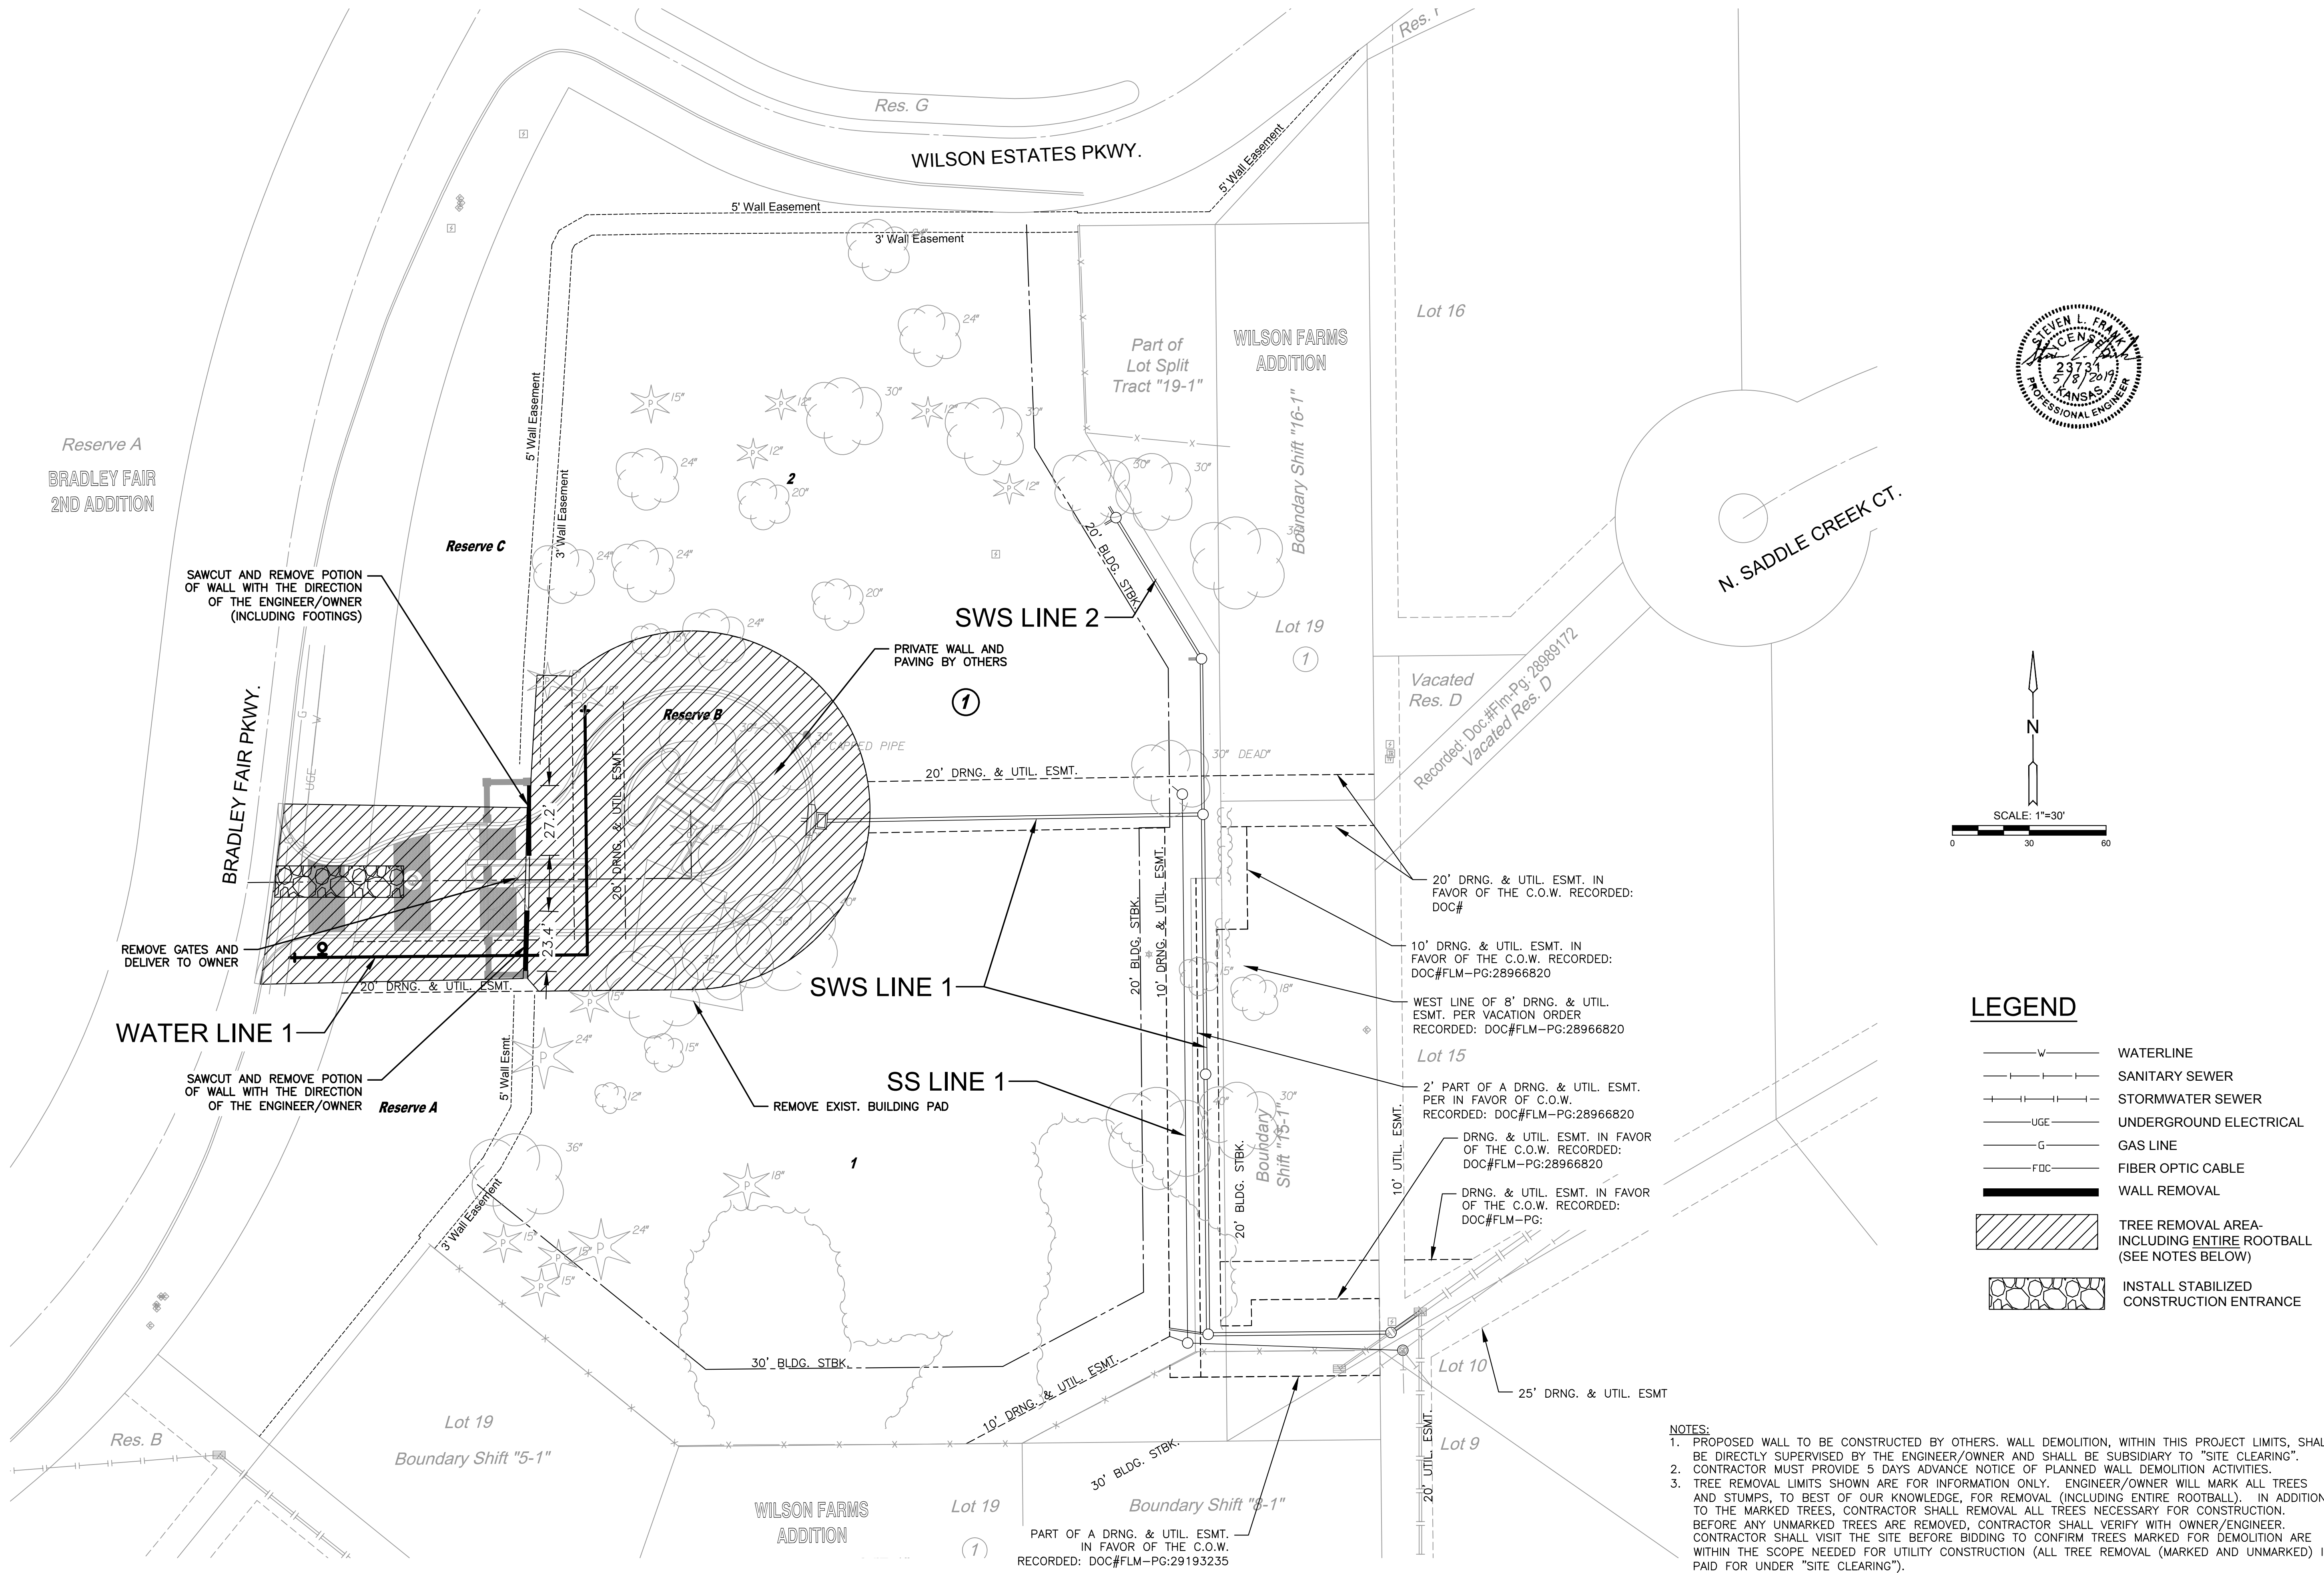







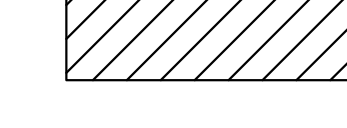



J:\PROJECTS\2019\1801010442_HOOVER_WILSON FARMS 5TH ADDITION\18442 CAD\SHS\18442_05_3205.DWG
 PLOTTED: Tuesday, May 07, 2019 @ 02:57PM

WATER PLAN FOR
WILSON FARMS 5TH ADDITION
 WICHITA, KANSAS



LEGEND

-  WATERLINE
-  SANITARY SEWER
-  STORMWATER SEWER
-  UNDERGROUND ELECTRICAL
-  GAS LINE
-  FIBER OPTIC CABLE
-  WALL REMOVAL
-  TREE REMOVAL AREA- INCLUDING ENTIRE ROOTBALL (SEE NOTES BELOW)
-  INSTALL STABILIZED CONSTRUCTION ENTRANCE

- NOTES:**
1. PROPOSED WALL TO BE CONSTRUCTED BY OTHERS. WALL DEMOLITION, WITHIN THIS PROJECT LIMITS, SHALL BE DIRECTLY SUPERVISED BY THE ENGINEER/OWNER AND SHALL BE SUBSIDIARY TO "SITE CLEARING".
 2. CONTRACTOR MUST PROVIDE 5 DAYS ADVANCE NOTICE OF PLANNED WALL DEMOLITION ACTIVITIES.
 3. TREE REMOVAL LIMITS SHOWN ARE FOR INFORMATION ONLY. ENGINEER/OWNER WILL MARK ALL TREES AND STUMPS, TO BEST OF OUR KNOWLEDGE, FOR REMOVAL (INCLUDING ENTIRE ROOTBALL). IN ADDITION TO THE MARKED TREES, CONTRACTOR SHALL REMOVE ALL TREES NECESSARY FOR CONSTRUCTION. BEFORE ANY UNMARKED TREES ARE REMOVED, CONTRACTOR SHALL VERIFY WITH OWNER/ENGINEER. CONTRACTOR SHALL VISIT THE SITE BEFORE BIDDING TO CONFIRM TREES MARKED FOR DEMOLITION ARE WITHIN THE SCOPE NEEDED FOR UTILITY CONSTRUCTION (ALL TREE REMOVAL (MARKED AND UNMARKED) IS PAID FOR UNDER "SITE CLEARING").

©2019
 MKEC Engineering
 All Rights Reserved
 www.mkec.com
 These drawings and their contents, including, but not limited to, all concepts, designs, & ideas are the exclusive property of MKEC Engineering (MKEC), and may not be used or reproduced in any way without the express consent of MKEC.

DEMOLITION PLAN

PROJECT NO.	448-2019-003877	
DATE	MAY 2019	
SCALE	1"=30'	
DESIGNED	DRAWN	CHECKED
SLF	CRM	SLF
NO.	REVISION	DATE
SHEET NO.		2 OF 12