


SCALE: 1"=20'  
20 10 0 20

NORTHEAST ELEMENTARY  
SCHOOL ADDITION

1 ①

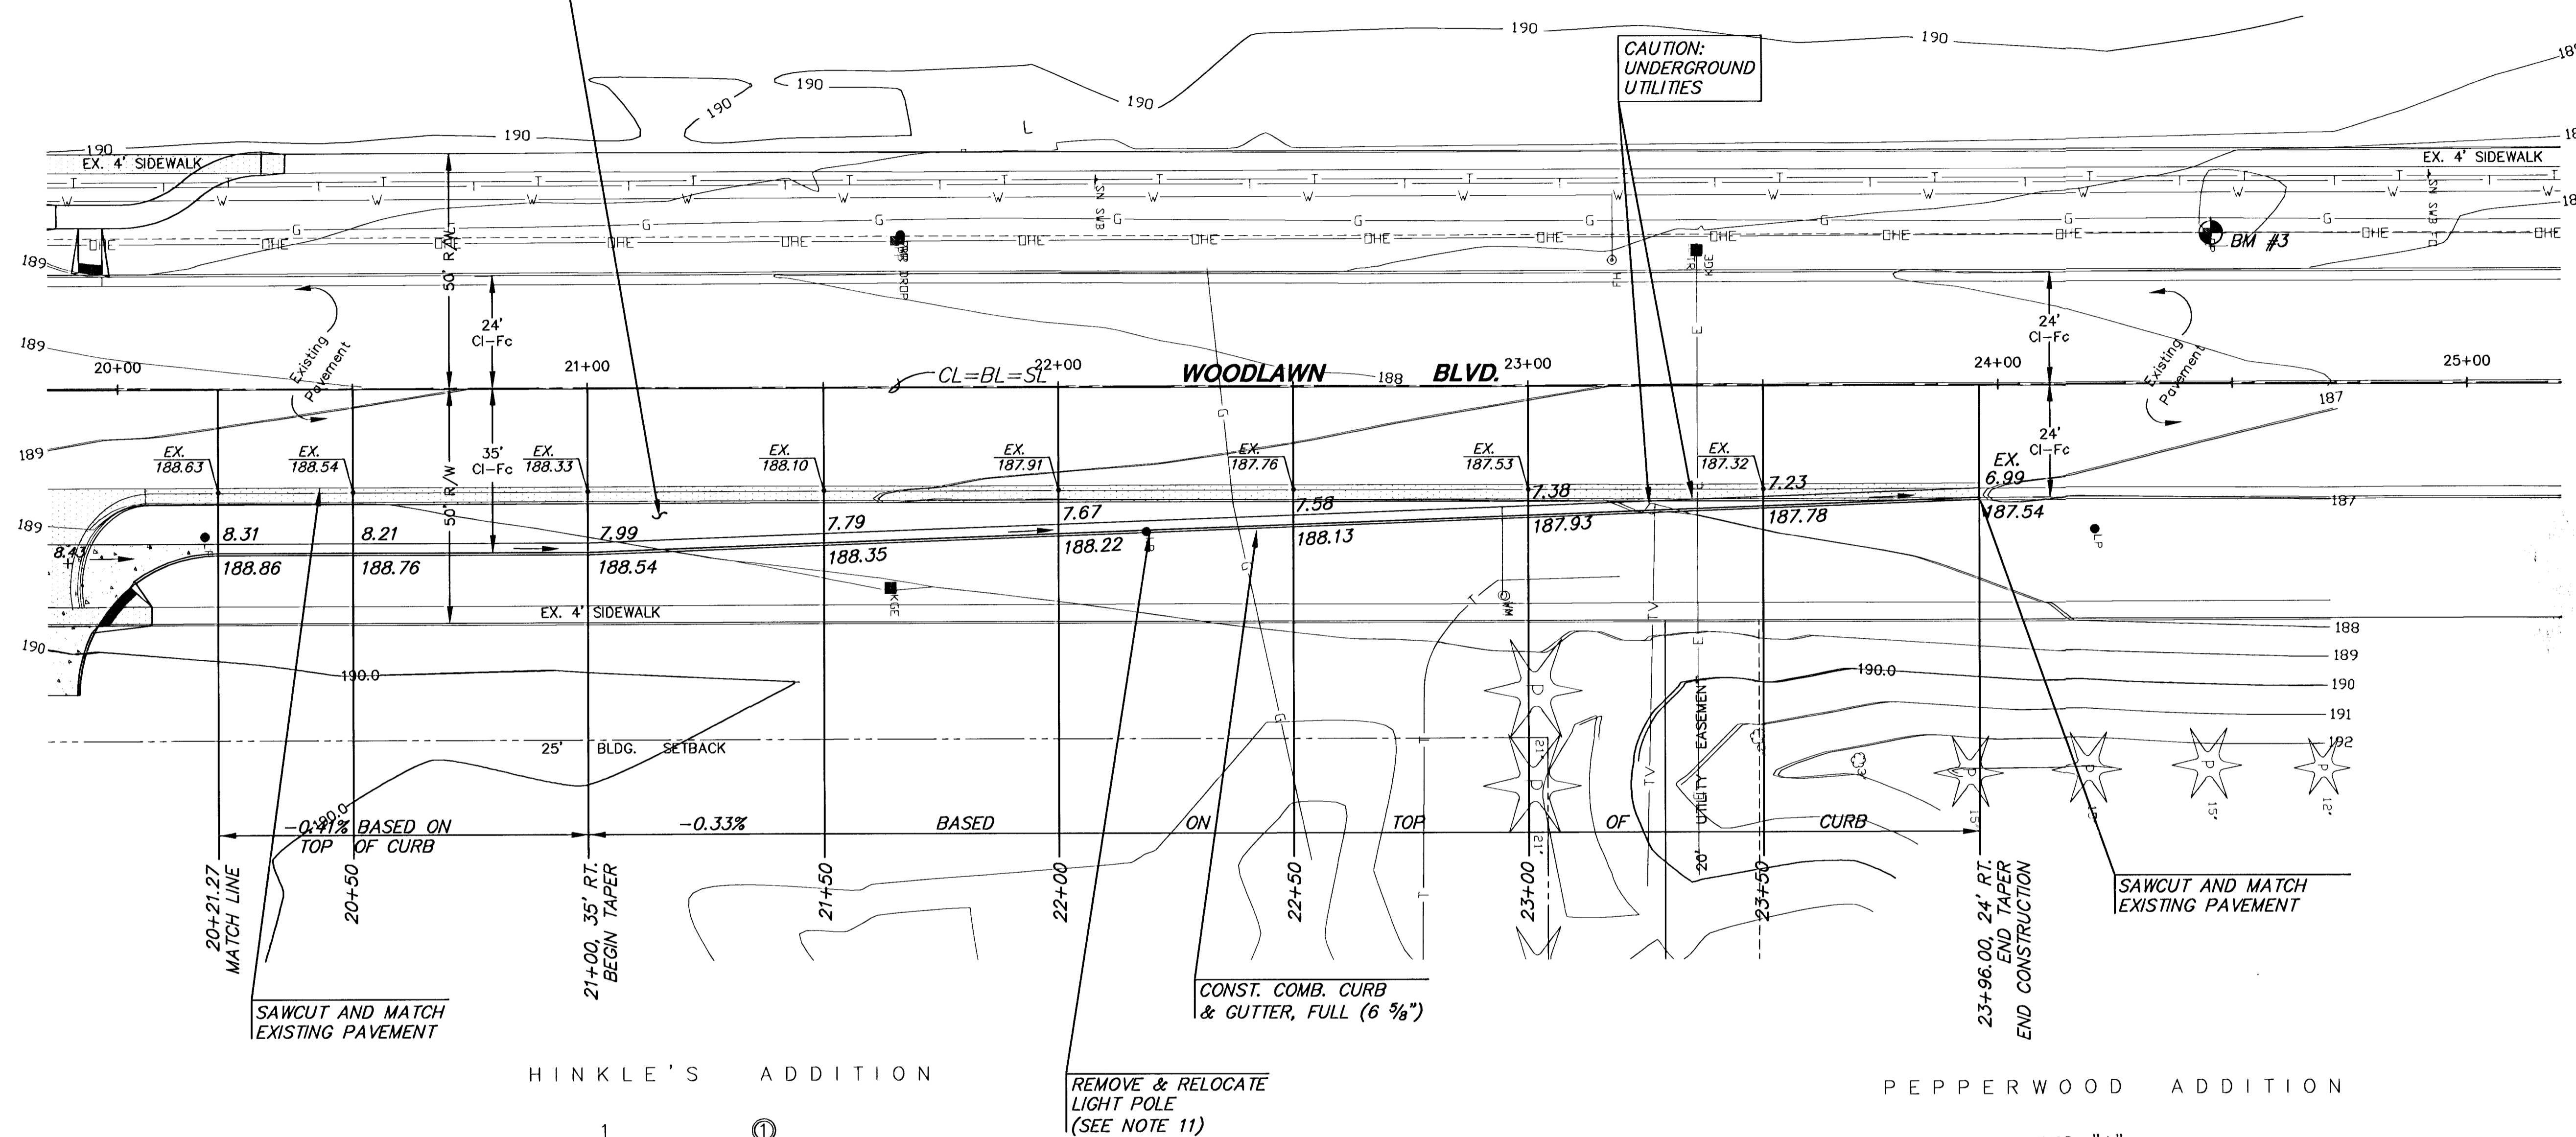

CONST. 7" A.C. PVMT.  
OVER 8" REINF. CRUSHED  
ROCK BASE.

CAUTION:  
UNDERGROUND  
UTILITIES

SAWCUT AND MATCH  
EXISTING PAVEMENT

CONST. COMB. CURB  
& GUTTER, FULL (6 3/8")

SAWCUT AND MATCH  
EXISTING PAVEMENT

HINKLE'S ADDITION

1 ①

REMOVE & RELOCATE  
LIGHT POLE  
(SEE NOTE 11)

PEPPERWOOD ADDITION

RES. "A"

LEGEND

PAVEMENT/SIDEWALK REMOVAL

NOTE:  
CONTRACTOR SHALL VERIFY LOCATION  
& DEPTH OF EXISTING UTILITIES PRIOR  
TO CONSTRUCTION.

 <b>MKEC</b> ENGINEERING CONSULTANTS 411 N. WEBB ROAD WICHITA, KS. 67204 316 - 684 - 9400	<b>WOODLAWN BLVD. TURN LANE</b>		
	PROJECT NAME		
	<b>STA 20+2127 TO STA 23+96.00</b>		
	SHEET TITLE		
	LAC DESIGN BY:	DAC DRAWN BY:	JTC CHECKED BY:
JUNE 2004 DATE	04147_E3 JOB NO.	7 / 30 SHEET/OF	