


Contractor to coordinate with Westar to support pole during construction.

Existing Pavement, Curb and Gutter to be Removed and Replaced as necessary for construction. No additional pay shall be made for this work, Subsidiary to other pay items.

WATER METER SUMMARY				
BL Station	Lt./Rt.	Service (Long or Short)	Address	As Built
5+77	Lt.	Short	2735 S CLASSEN	
6+34 * 4	Rt.	Long	2732 S CLASSEN	
6+34 * 4	Rt.	Long	2726 S CLASSEN	
6+40	Lt.	Short	2727 S CLASSEN	
6+96	Lt.	Short	2719 S CLASSEN	
7+37 * 5	Rt.	Long	2720 S CLASSEN	

WATER METER SUMMARY				
BL Station	Lt./Rt.	Service (Long or Short)	Address	As Built
7+37 * 5	Rt.	Long	2712 S CLASSEN	
7+65	Lt.	Short	2711 S CLASSEN	
8+26	Lt.	Short	2707 S CLASSEN	
8+57 * 6	Rt.	Long	2708 S CLASSEN	
8+57 * 6	Rt.	Long	2702 S CLASSEN	

\* These houses share the same tap and the same meter box.  
 4 - 2732 & 2726 S. Classen  
 5 - 2720 & 2712 S. Classen  
 6 - 2708 & 2702 S. Classen

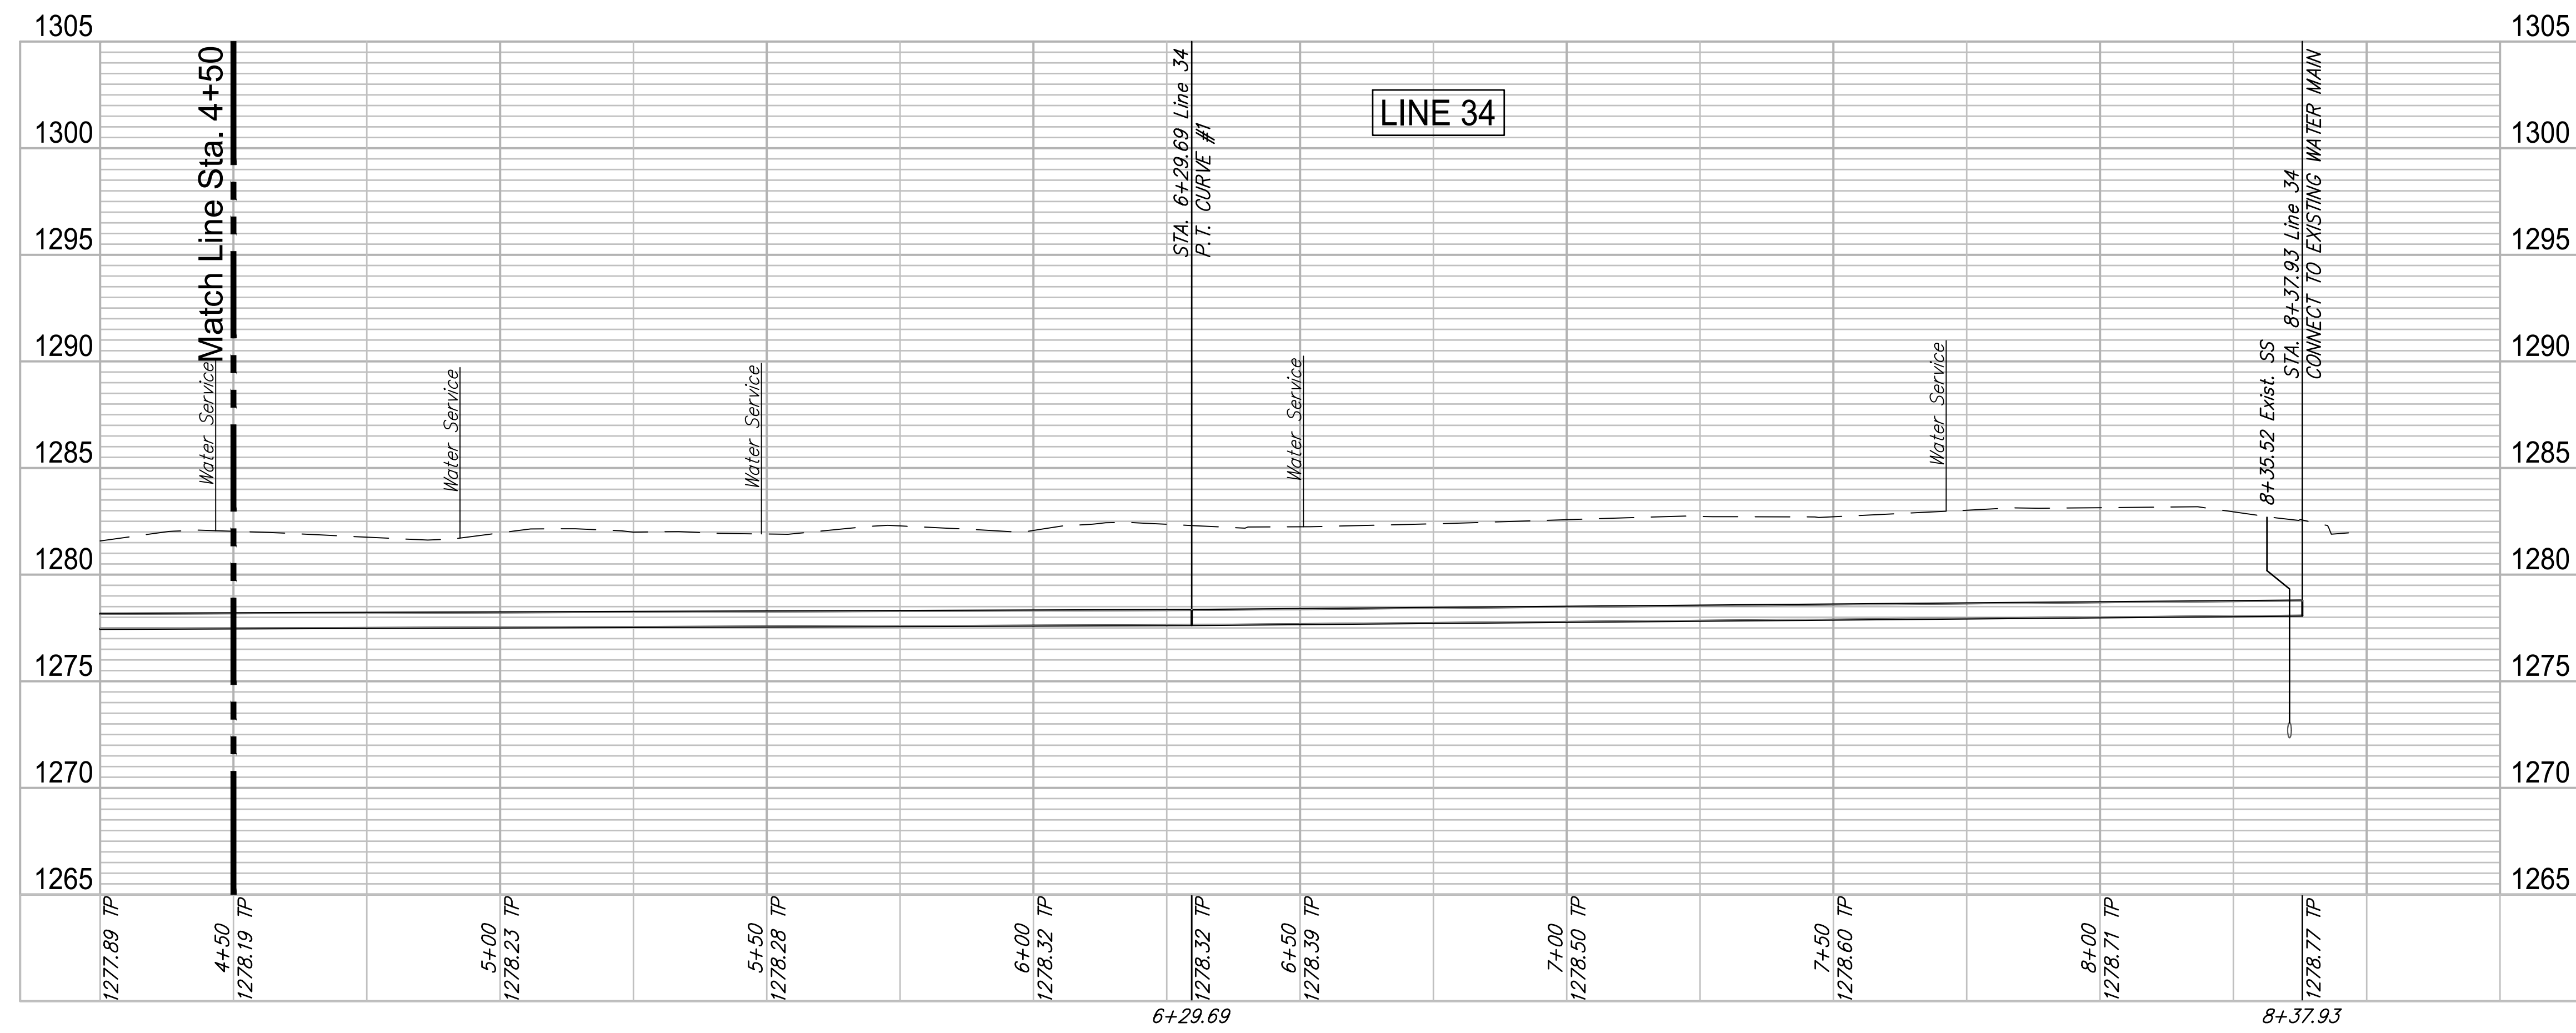

**ROSE MARIE WATER - Part B**  
**Classen - Line 34 (2 of 2)**  
 Wichita, Kansas

PROJECT NUMBER: 448-30721  
 DRAWING FILE: 4701W Engineering Base Area 2

DESIGN: CMB / RA  
 DRAWN: DRS / RA

REVIEW: 5-24-2017  
 DATE: 4/2/2018

GARVER JOB SHEET: 16264701  
 38 OF 53

© Copyright 2018, Garver