

- ▲ Replace Wheel Chair Ramp
- Contractor to coordinate with Westar to support pole during construction.
- ▨ Existing Pavement, Curb and Gutter to be Removed and Replaced as necessary for construction. No additional pay shall be made for this work. Subsidiary to other pay items.

WATER METER SUMMARY				
BL Station	Lt./Rt.	Service (Long or Short)	Address	As Built
1+97	Lt.	Long	1908 E DENKER	
2+10	Lt.	Long	1912 E DENKER	
2+94	Lt.	Long	1918 E DENKER	
3+40	Rt.	Short	1901 E DENKER	
3+53	Lt.	Long	1922 E DENKER	
3+77	Lt.	Long	1928 E DENKER	

SEE DISCONNECT #34, SHEET NO. 48

16.07 L.F. 8" PVC

N 1670518.03 E 1656648.95
 STA. 0+00.00, LINE 39 =
 STA. 1+08.11 DENKER, 23.80' RT.
 CONNECT TO EXIST. 8" MAIN
 * 1-8" TAPPING VALVE
 * 1-8"X8" TAPPING SLEEVE
 ** 1-6" VALVE BOX ASS'Y.
 VALVE BOX ELEV. 1280.00
 *SUPPLIED AND INSTALLED BY
 CITY OF WICHITA WATER DEPT.
 ** SUPPLIED BY C.O.W.
 INSTALLED BY CONTRACTOR

121.71 L.F. 8" PVC



CURVE #1
 Rad = 129.680
 L = 121.705
 Δ = 53°46'21"

N 1670527.35 E 1656662.05
 STA. 0+16.07, LINE 39 =
 STA. 1+24.55 DENKER, 24.03' RT.
 P.C. CURVE #1
 USE SHORT LENGTHS PIPE

118.22 L.F. 8" PVC

N 1670544.79 E 1656778.03
 STA. 1+37.78, LINE 39 =
 STA. 2+68.79 DENKER, 24.00' RT.
 P.T. CURVE #1

Jennings Addition

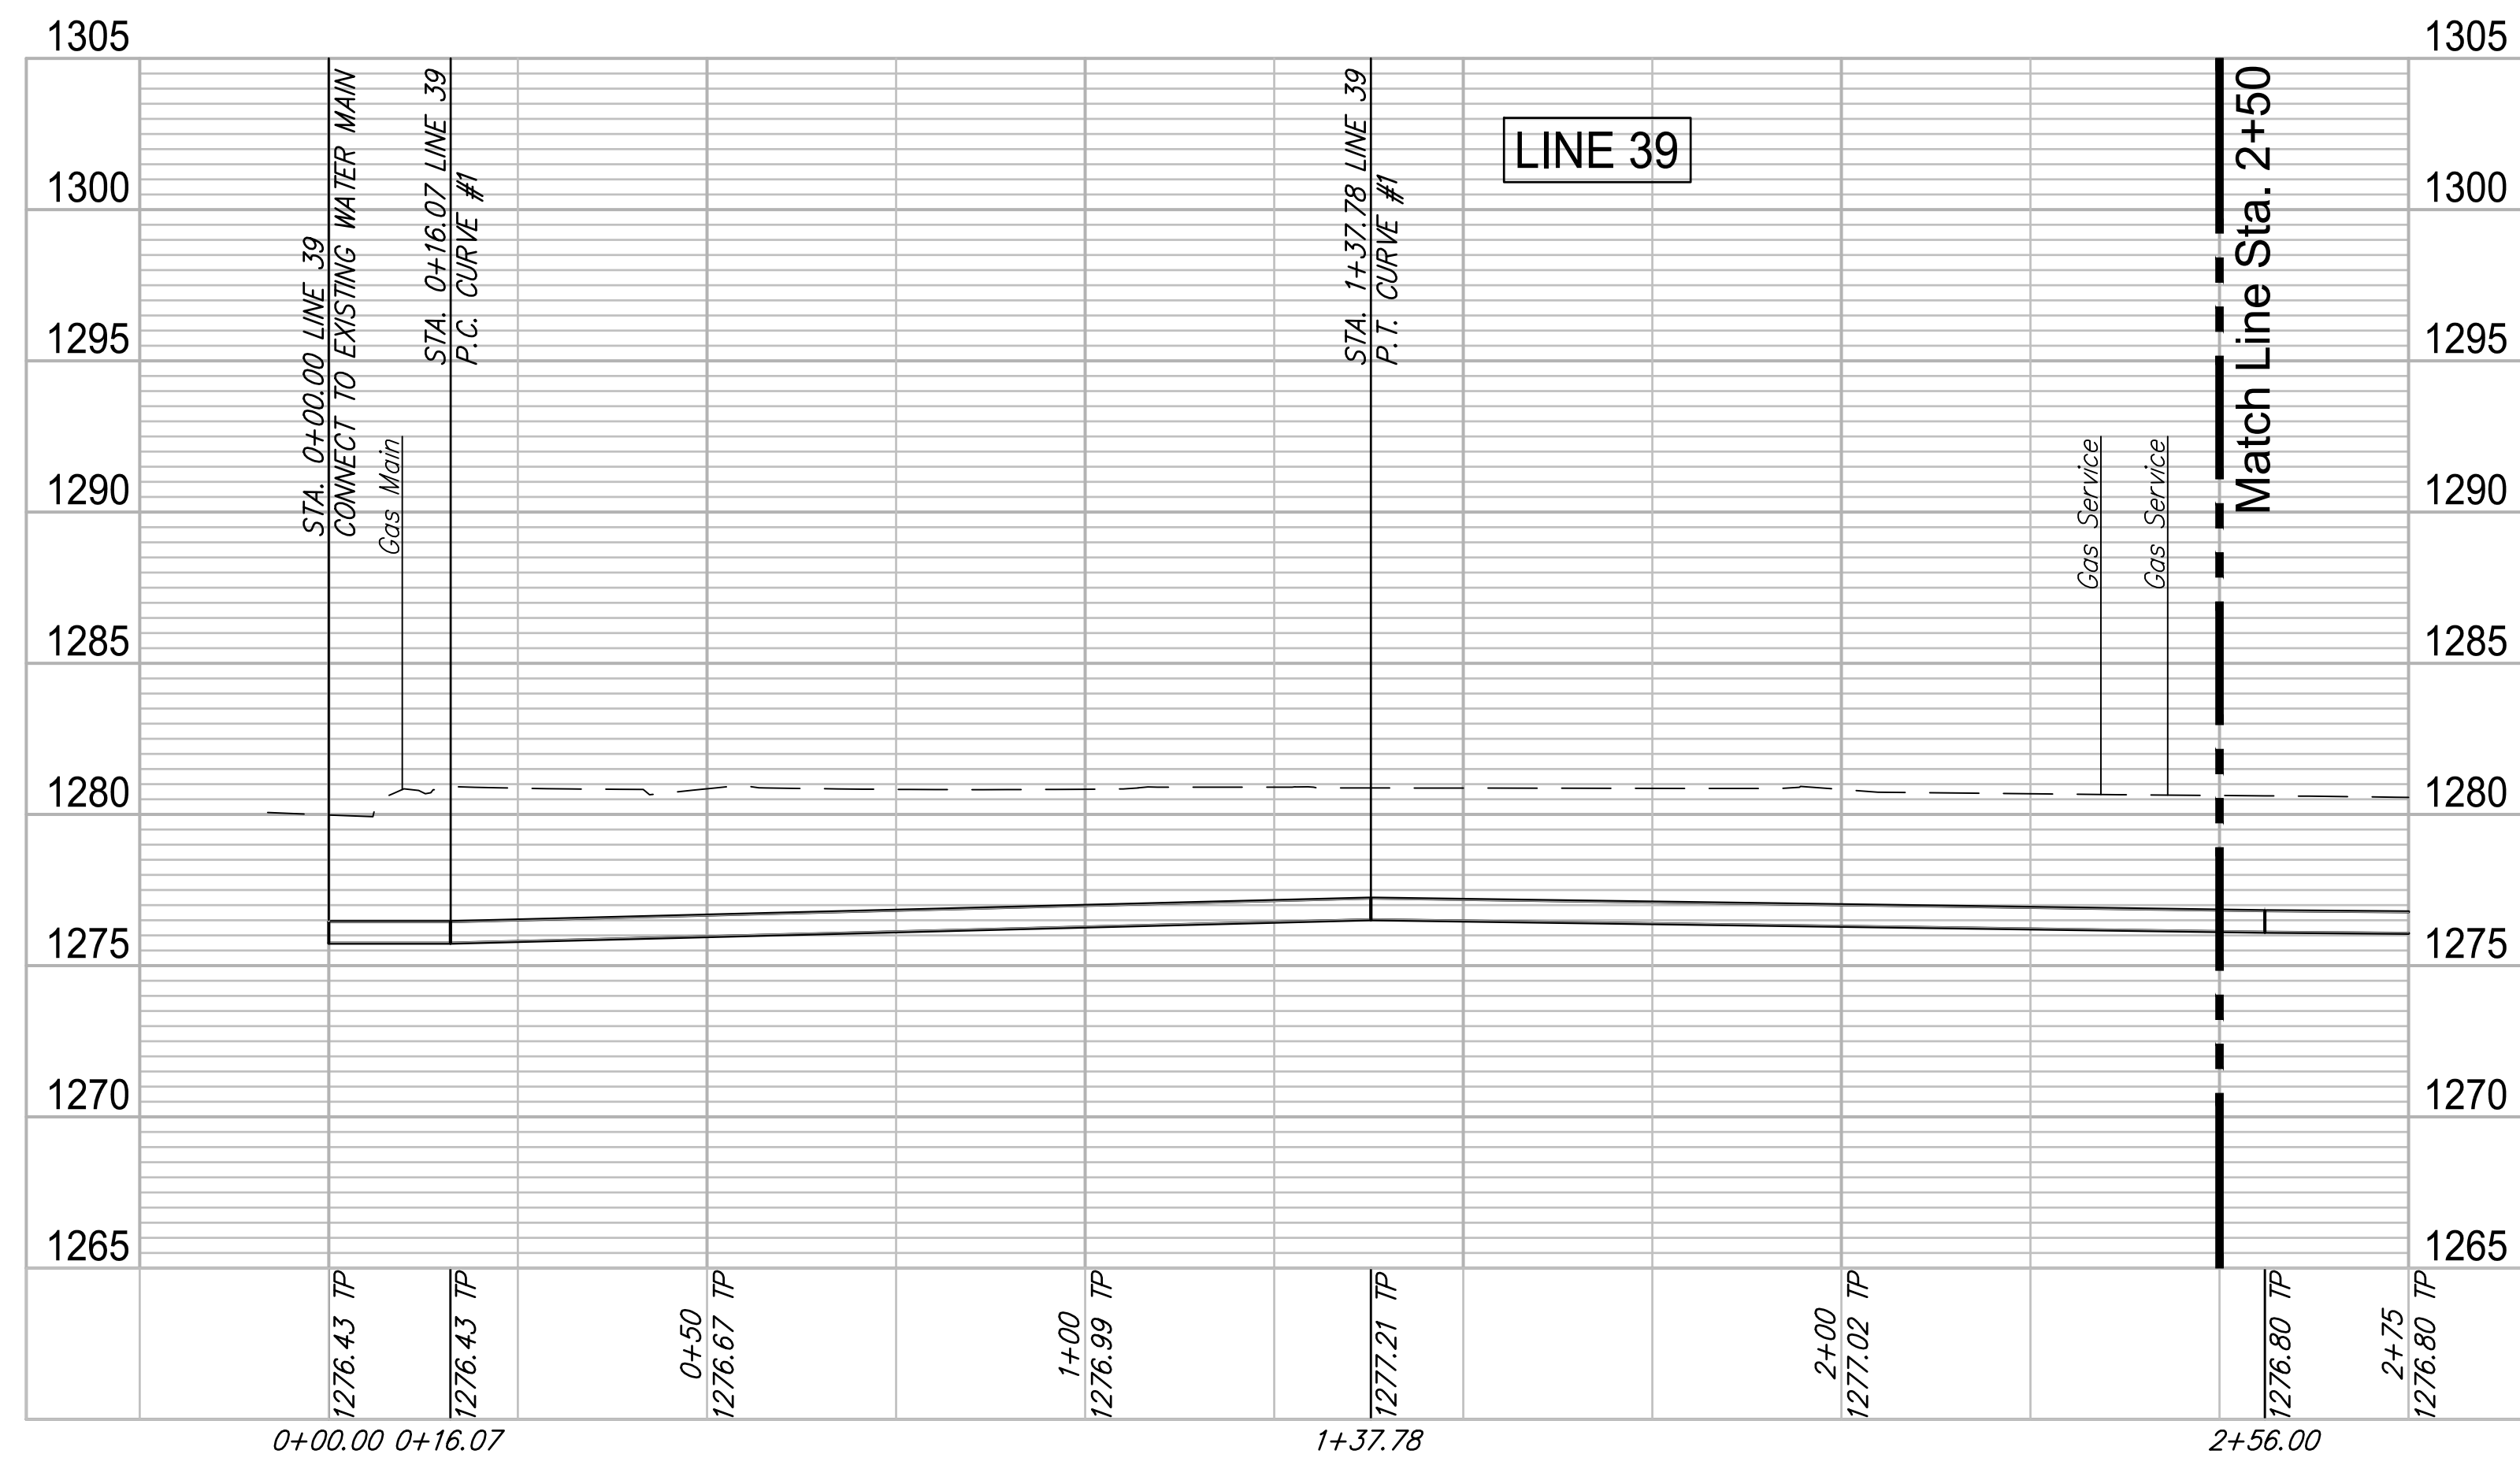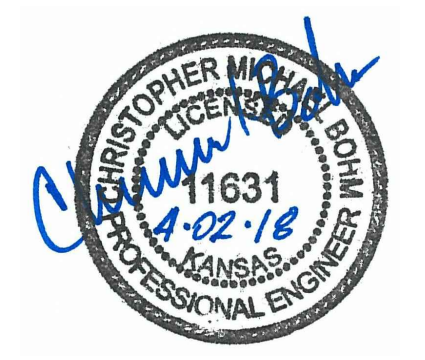

ROSE MARIE WATER - Part B
Denker - Line 39 (1 of 2)
 Wichita, Kansas

PROJECT NUMBER 448-30721	DESIGN CMB / RA	REVIEW 5-24-2017
DRAWING FILE 4701W Engineering Base Area 1	DRAWN DRS / RA	DATE 4/2/2018

GARVER JOB NO. 16264701
 SHEET 45 OF 53
 © Copyright 2018, Garver